


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
X		EXPERIMENTAL RELEASE	94cc	X		
X		IN WAS H	10-20-66	X		
2		ORIGINAL RELEASE FOR PRODUCTION	3-27-67		RME	

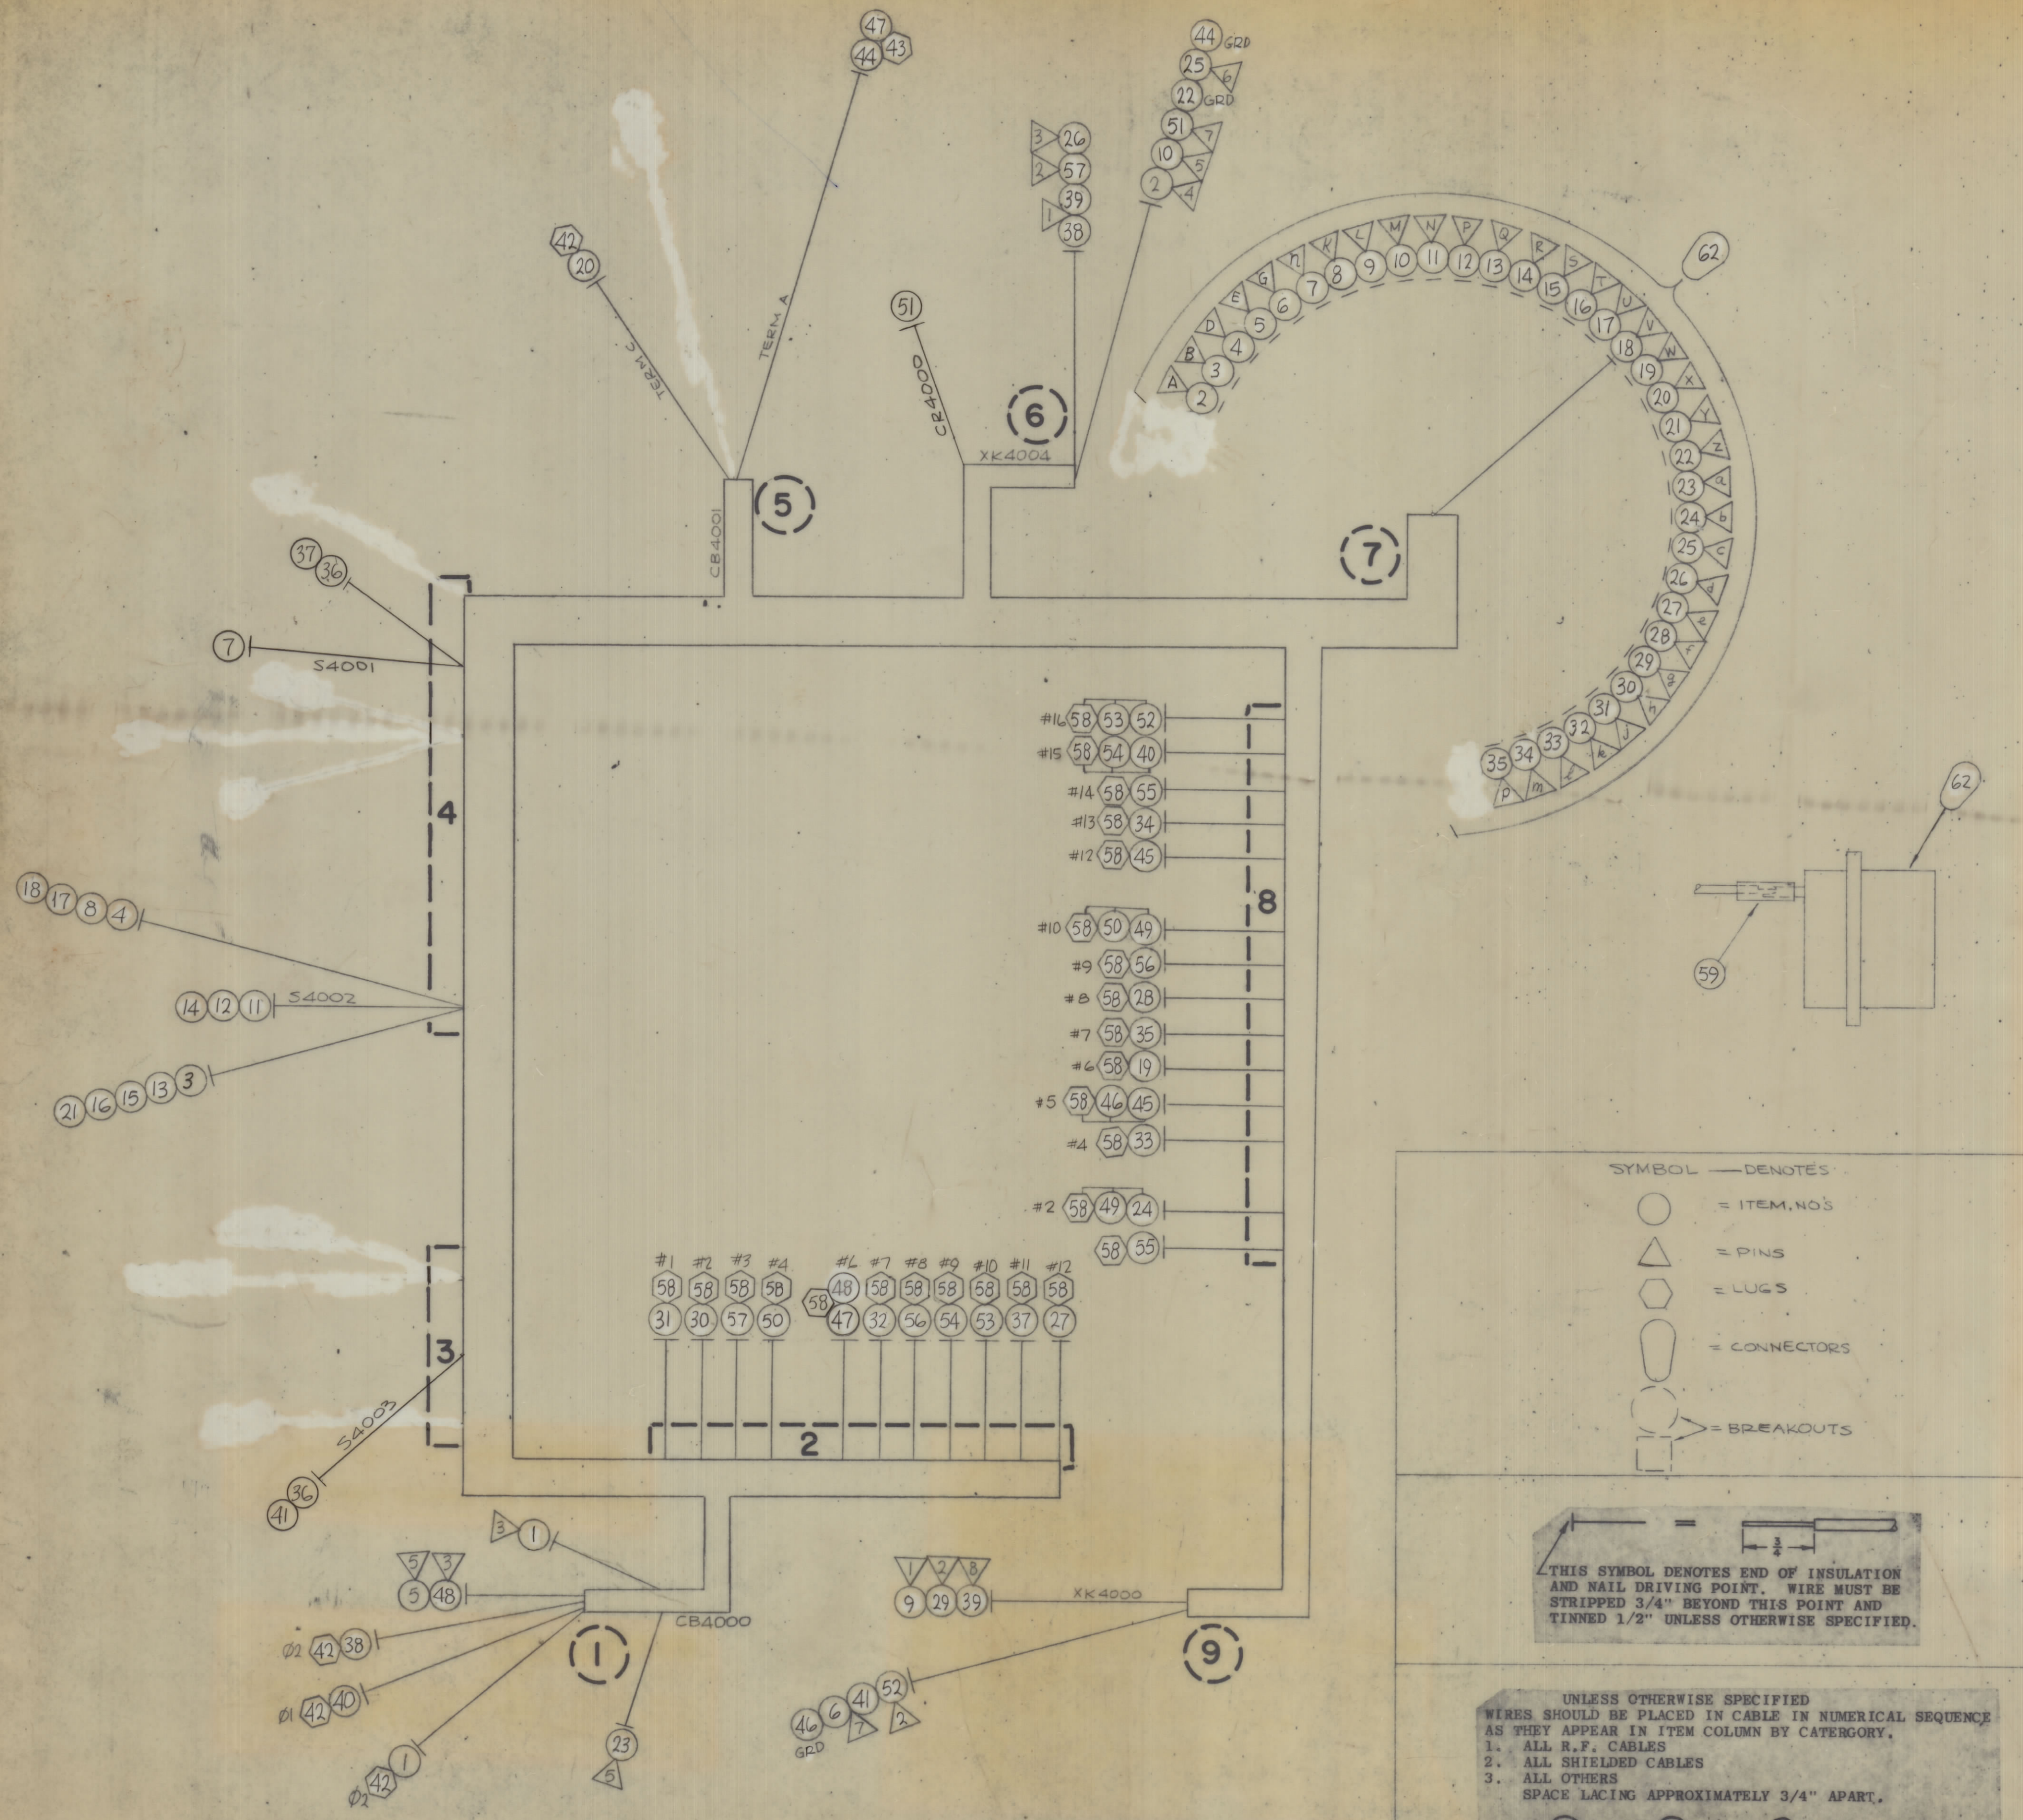

SYMBOL — DENOTES


- = ITEM NOS
- △ = PINS
- ⬡ = LUGS
- ◡ = CONNECTORS
- ⊃ = BREAKOUTS

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

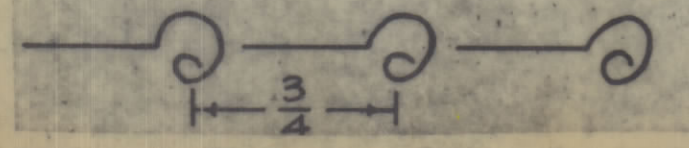

NOTES

TCP-3	
QTY/UNIT	MODEL USED ON
SCALE	CODE
	3401-451
	3401
	3401

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
E. BUDETTI				
LIST OF MATERIAL				
THE TECHNICAL MATERIEL CORP.				
MAMARONECK, NEW YORK				
TITLE				
WIRING HARNESS, BRANCHED				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				
DRAWN	DATE	FINAL APPROVAL	DATE	DATE
3/26	3/26			3/27
CHECKED	DATE			
ELECT. DES.	DATE			
MECH. DES.	DATE			

CA1268