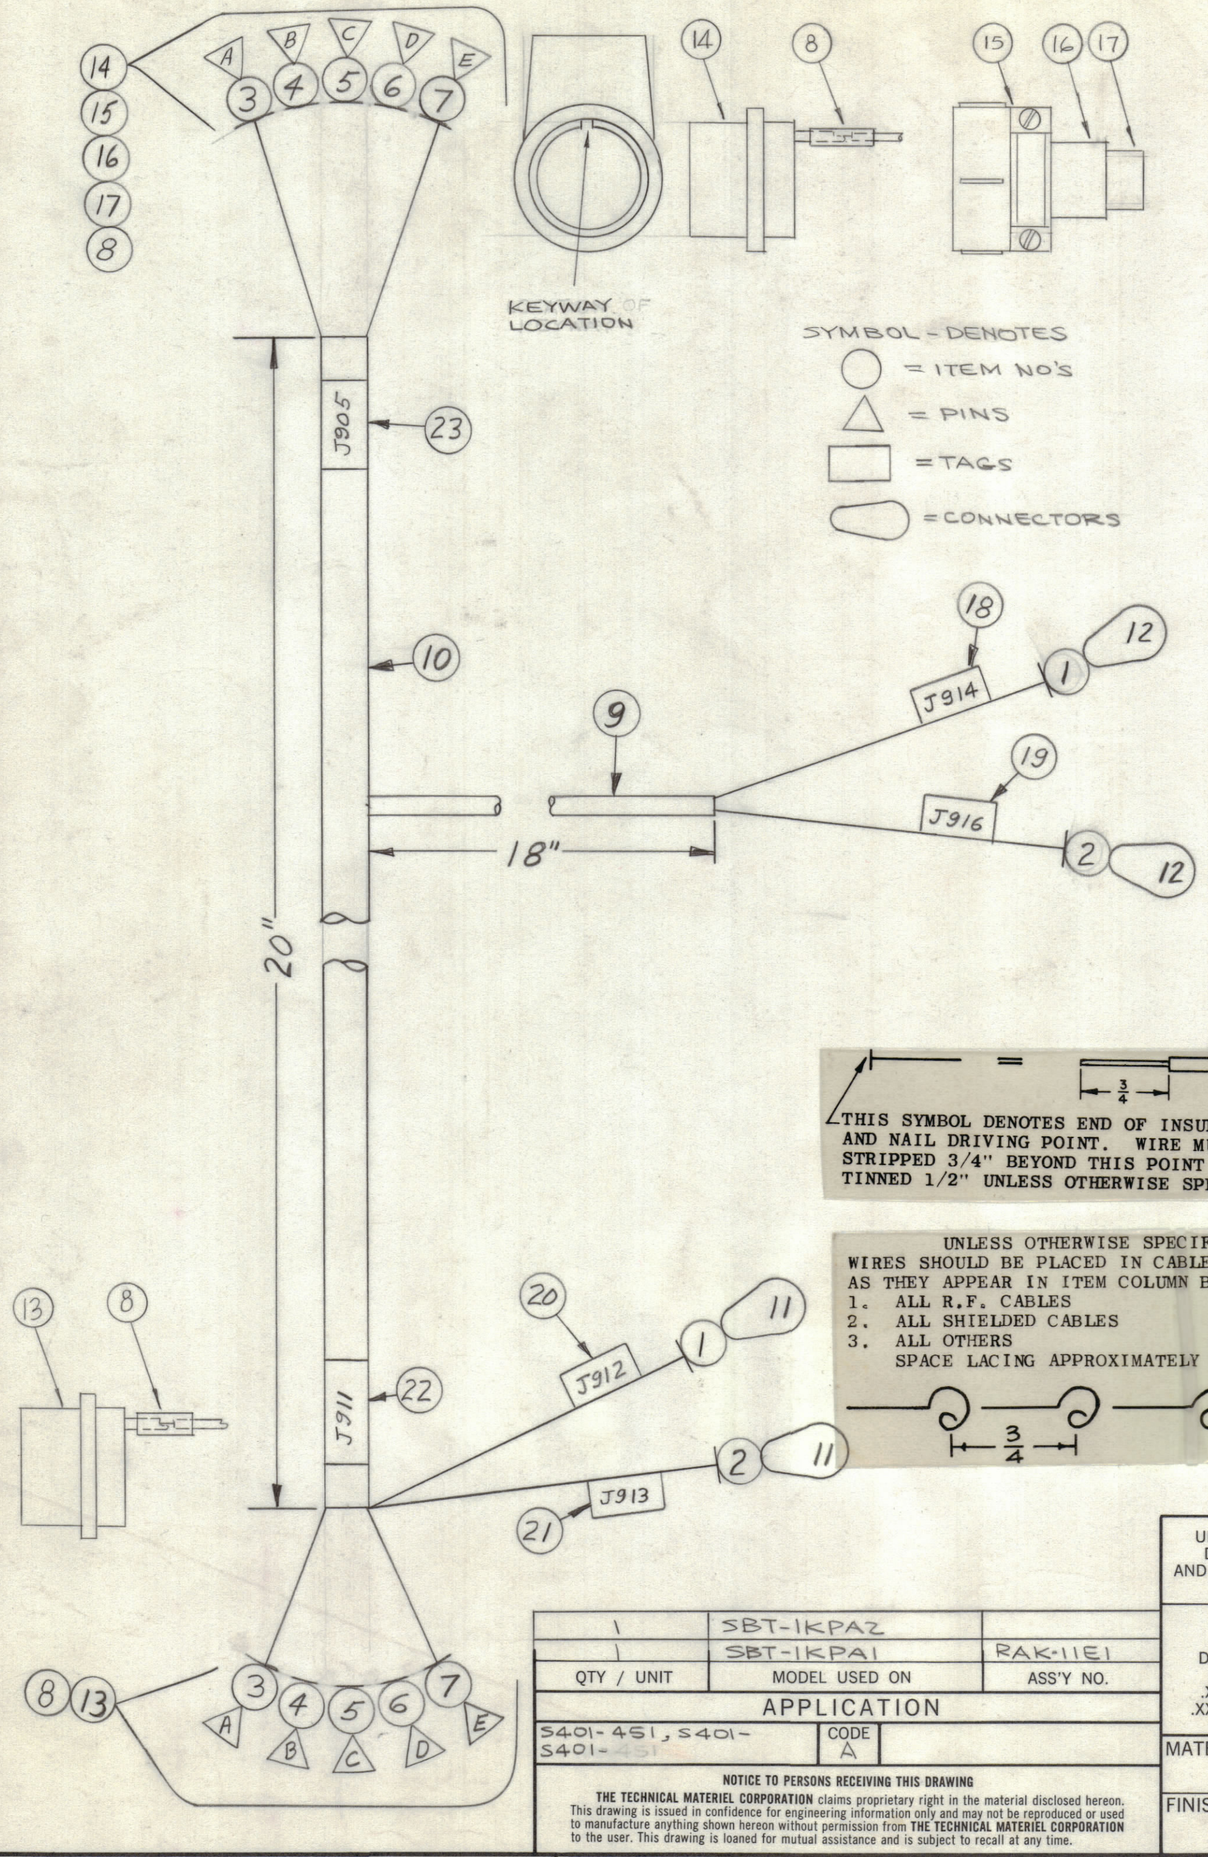

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATERGORY.
1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS
SPACE LACING APPROXIMATELY 3/4" APART.

REVISIONS							
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	X	EXP. RELEASE	2-14-67				
	X1	IT 14 WAS MS3106B20-27S, KEWAY LOCATION ADDED	3-13-67				
	Ø	ORIGINAL RELEASE FOR PRODUCTION	9-6-67	Ø	CV		

QTY. REQ.	ITEM	PART NO.	FROM	DESCRIPTION	TO	SYMBOL
X	26	BS100	SOLDER, TIN ALLOY			
X	25	TA100-1	INS, TAPE, EL-GL 1/4W			
X	24	CD101-1MW	CD, LACING, NYLON			
1	23	LA107-20-J905	SLV, MKR, CBL			
1	22	LA107-14-J911	↑ ↑ ↑			
1	21	LA107-9-J913				
1	20	↑ -J912				
1	19	↓ -J916				
1	18	LA107-9-J914	SLV, MKR, CBL			
1	17	MS3420-8A	BUSH, RUB			
1	16	MS3420-12A	BUSH, RUB			
1	15	MS3057-12	CLP, CBL, EL CONN			
1	14	MS3108B20-27S	CONN, PL FML 14/C			
1	13	MS3102A20-27S	CONN, RECP FML 14/C			
2	12	PL244-1	CONN, PL BNC			
2	11	JJ172	CONN, RECP BNC			
	10	PX100-1-294	INS SLVG, BLK			
	9	PX100-1-208	INS SLVG, BLK			
	8	PX100-1-106	INS SLVG, BLK			
	7	MWC22(7)U5	P905-E J904		J911-E	
	6	↑ 4	↑ -D		J911-D	
	5	3	-C		J911-C	
	4	↓ 2	↓ -B		J911-B	
	3	MWC22(7)U1	P905-A J904		J911-A	
	2	RG174/U	P926 J916		J913	
	1	RG174/U	P925 J914		J912	

LIST OF MATERIAL

1	SBT-1KPA2	
1	SBT-1KPA1	RAK-11E1
QTY / UNIT	MODEL USED ON	ASS'Y NO.

APPLICATION

S401-451, S401-S401-451 | CODE A

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON
DECIMALS .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

MATERIAL

FINISH

FINAL APPROVAL		DATE 9/6/67
MECH. DES.		DATE
ELECT. DES.		DATE 6 APR 67
CHECKED		DATE
DRAWN		DATE 2-14-67

F. BUDETTI

M/L Ø

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

WIRING HARNESS, BRANCHED

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
C	82679	CA1325	Ø
SCALE 1:1			SHEET OF

CA1325 Ø

FCI-10-170 (10-66)