



REVISIONS							
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	X	EXP. RELEASE	12/3/68		K/H		
	Ø	ORIGINAL RELEASE FOR PRODUCTION	12-26-68		PG		

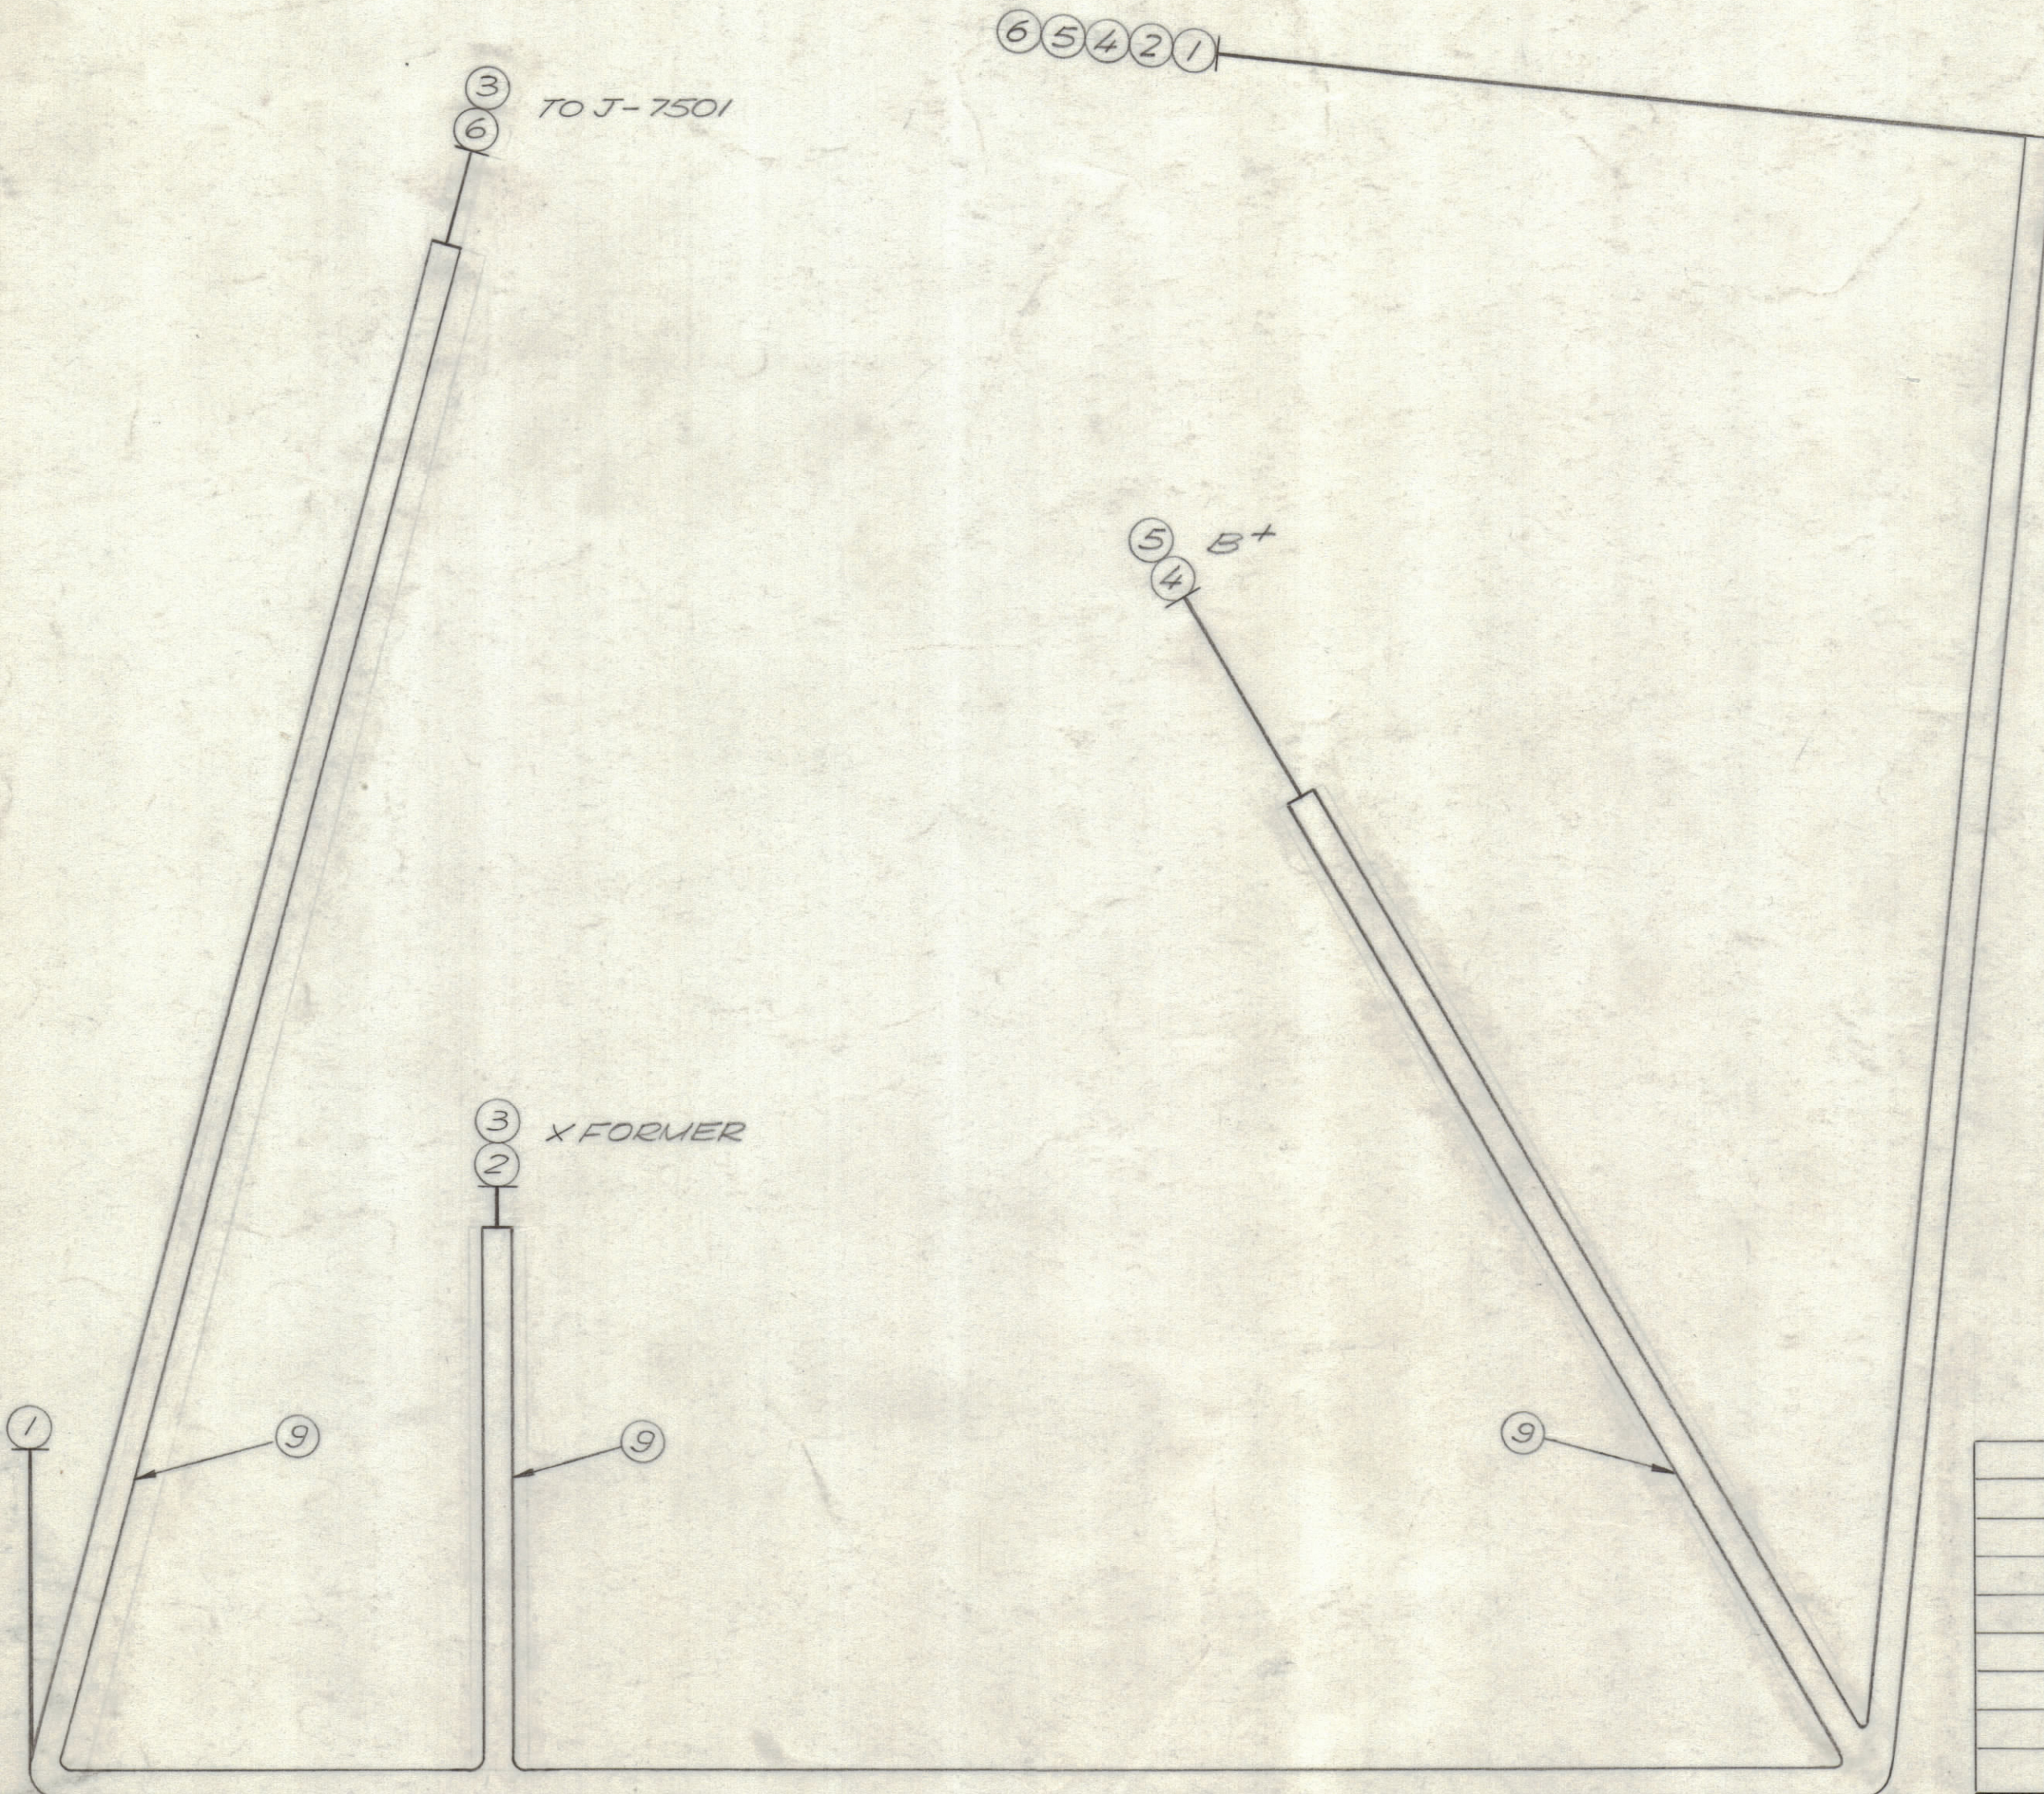

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R. F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART

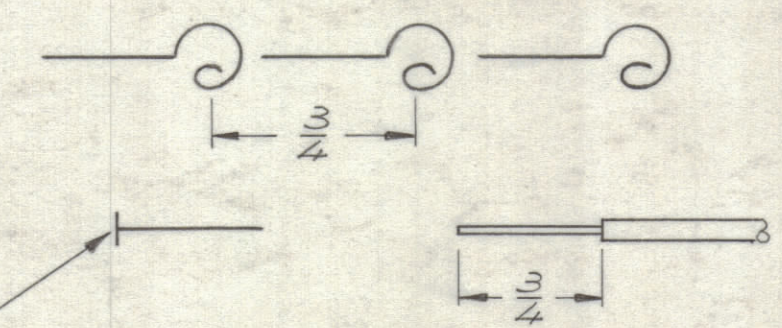

THIS SYMBOL DENOTES END OF INSULATION
AND NAIL DRIVING POINT. WIRE MUST BE
STRIPPED 3/4" BEYOND THIS POINT AND
TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

CABLE LACED UNLESS SPECIFIED.

9	PX-100-1-8	INS. SLVG. ELEC.	
8	BS 100	SOLDER, TIN ALLOY	
7	CD 101-1 MW	CORD, NYLON, LACING	
6	MWC 20 (7) U1	WIRE, ELEC. INS.	BROWN
5		U2	RED
4		U92	RED/WH.
3		U98	GRA/WH.
2		U7	VIO.
1	MWC 20 (7) U6	WIRE, ELEC. INS.	BLUE

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
-----------	------	----------	-------------	--------

LIST OF MATERIAL						
FINAL APPROVAL		DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK WIRING, HARNES, BRANCHED CABLE, RELAY, CONNECT			
MECH. DES.		DATE				
ELECT. DES.		DATE				
CHECKED		DATE				
DRAWN		DATE	SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
			C	82679	CA 1474	Ø
			SCALE	SHEET		OF

SYMBOL - DENOTES

○ = ITEM NO'S

1	KIT 322	ASS'Y NO.
QTY / UNIT	MODEL USED ON	
APPLICATION		
CODE		

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon.
This drawing is issued in confidence for engineering information only and may not be reproduced or used
to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION
to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
AND INCLUDE CHEMICALLY APPLIED
OR PLATED FINISHES

TOLERANCES ON	
DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° -30'

MATERIAL

FINISH