



REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E. M. N. NO	DRAFT	CHKD APPD
X		EXP. RELEASE	12/6/68		L.H.	
XI		REV. & CLARIFIED	1/23/69		L.H.	
B		ORIGINAL RELEASE FOR PRODUCTION	2-4-69		R.G.	
A		REVISED & UPDATED	8/12/63		GE	NO
B		CHG 1T, 102, 103, 109 & 110	2-11-71	20227	RZ	U

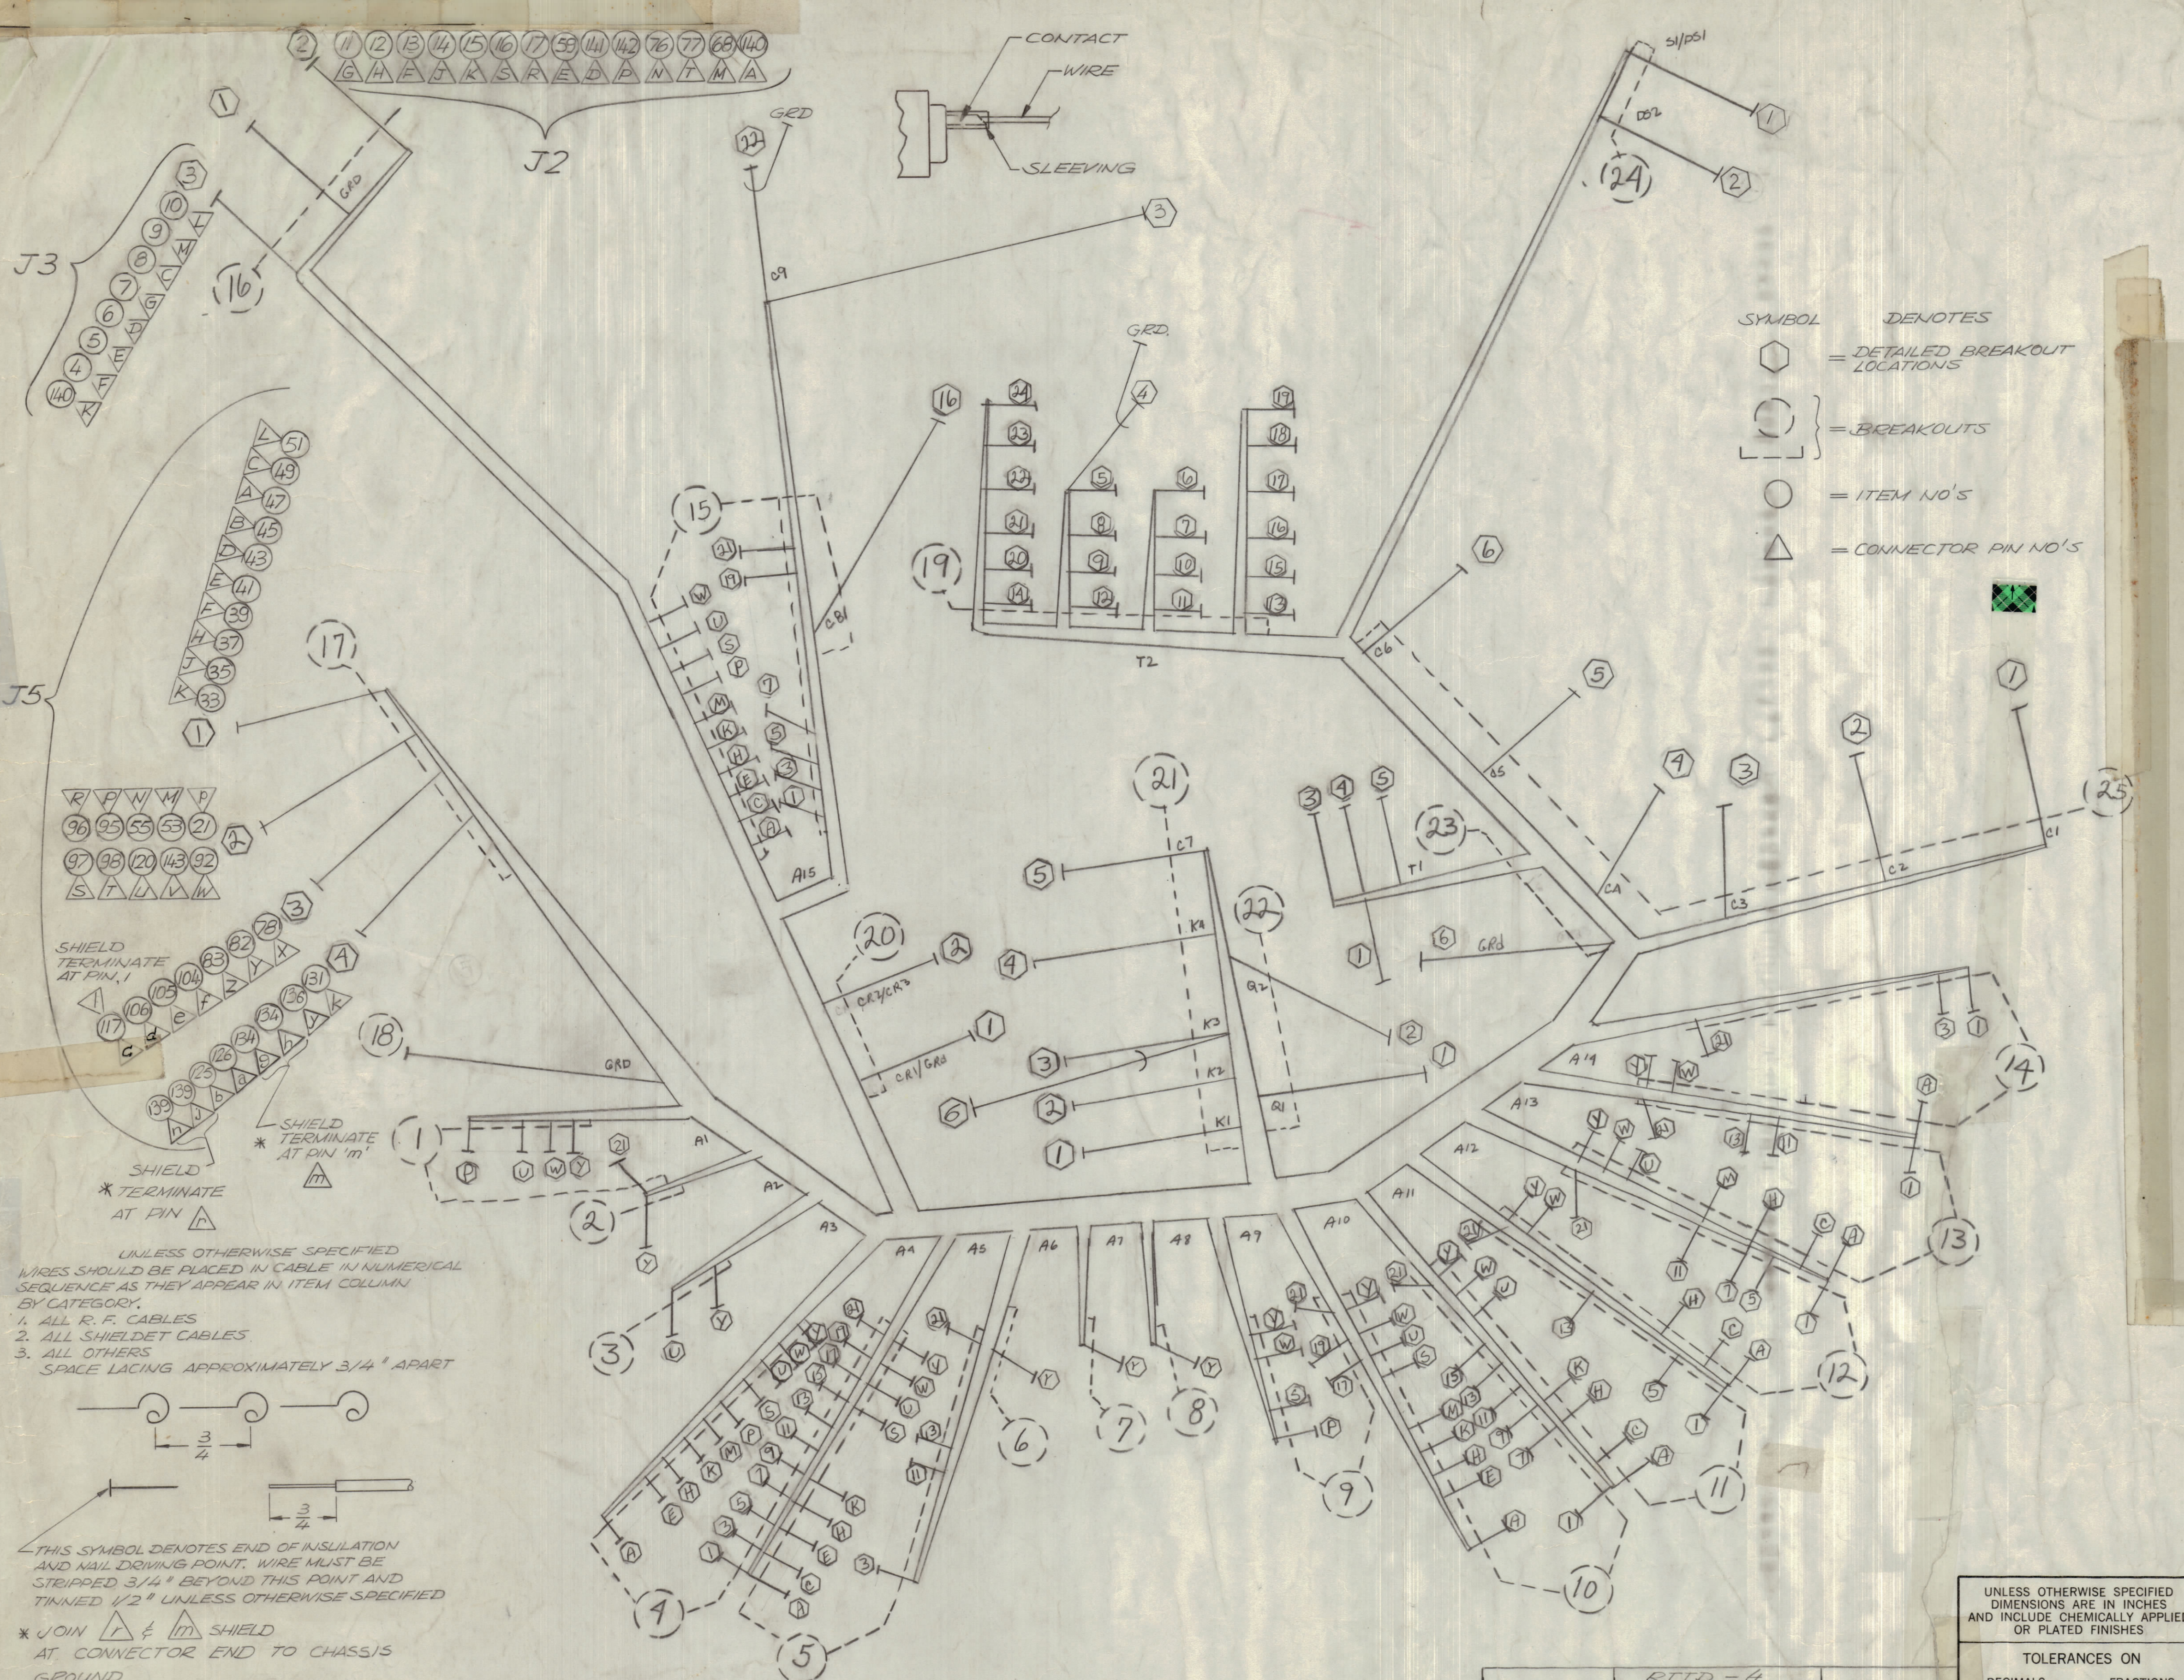

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL
SEQUENCE AS THEY APPEAR IN ITEM COLUMN
BY CATEGORY.

1. ALL R. F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART

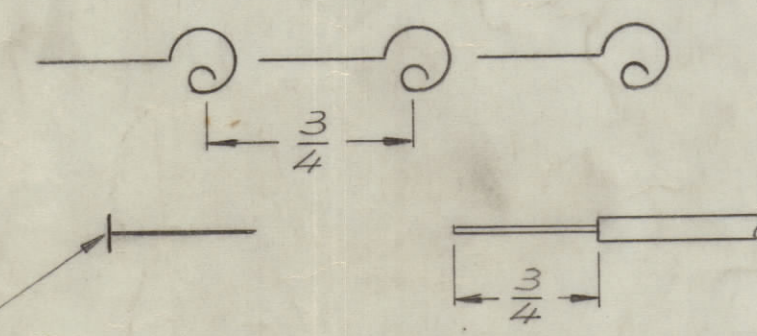

THIS SYMBOL DENOTES END OF INSULATION
AND NAIL DRAWING POINT. WIRE MUST BE
STRIPPED 3/4" BEYOND THIS POINT AND
TINNED 1/2" UNLESS OTHERWISE SPECIFIED

* JOIN ∇ & ∇ SHIELD
AT CONNECTOR END TO CHASSIS
GROUND

NOTE:
CABLE LACED UNLESS SPECIFIED

SYMBOL DENOTES

- Hexagon = DETAILED BREAKOUT LOCATIONS
- Circle = BREAKOUTS
- Circle = ITEM NO'S
- Triangle = CONNECTOR PIN NO'S

QTY / UNIT	MODEL USED ON	ASS'Y NO.
	RTTD - 4	
APPLICATION		
CODE		
<small>NOTICE TO PERSONS RECEIVING THIS DRAWING</small> <small>THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.</small>		

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				
TOLERANCES ON		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
DECIMALS	FRACTIONS	WIRING HARNESS, BRCHD.		
.X ± .05	± 1/64	SIZE CODE IDENT. NO. DWG NO. ISSUE		
.XX ± .01	ANGLES	D 82679 CA 1475		
.XXX ± .005	± 0°-30'	SCALE SHEET OF		