


UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

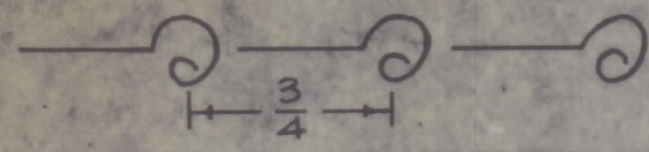


THIS SYMBOL DENOTES END OF INSULATION
AND NAIL DRIVING POINT. WIRE MUST BE
STRIPPED 3/4" BEYOND THIS POINT AND
TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THIS SYMBOL DENOTES END OF SHIELD, WHICH
SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS
SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

THIS SYMBOL INDICATES END OF SHIELDING.

REVISIONS					
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	APPRO
		ORIGINAL RELEASE FOR PRODUCTION	1/2/72		

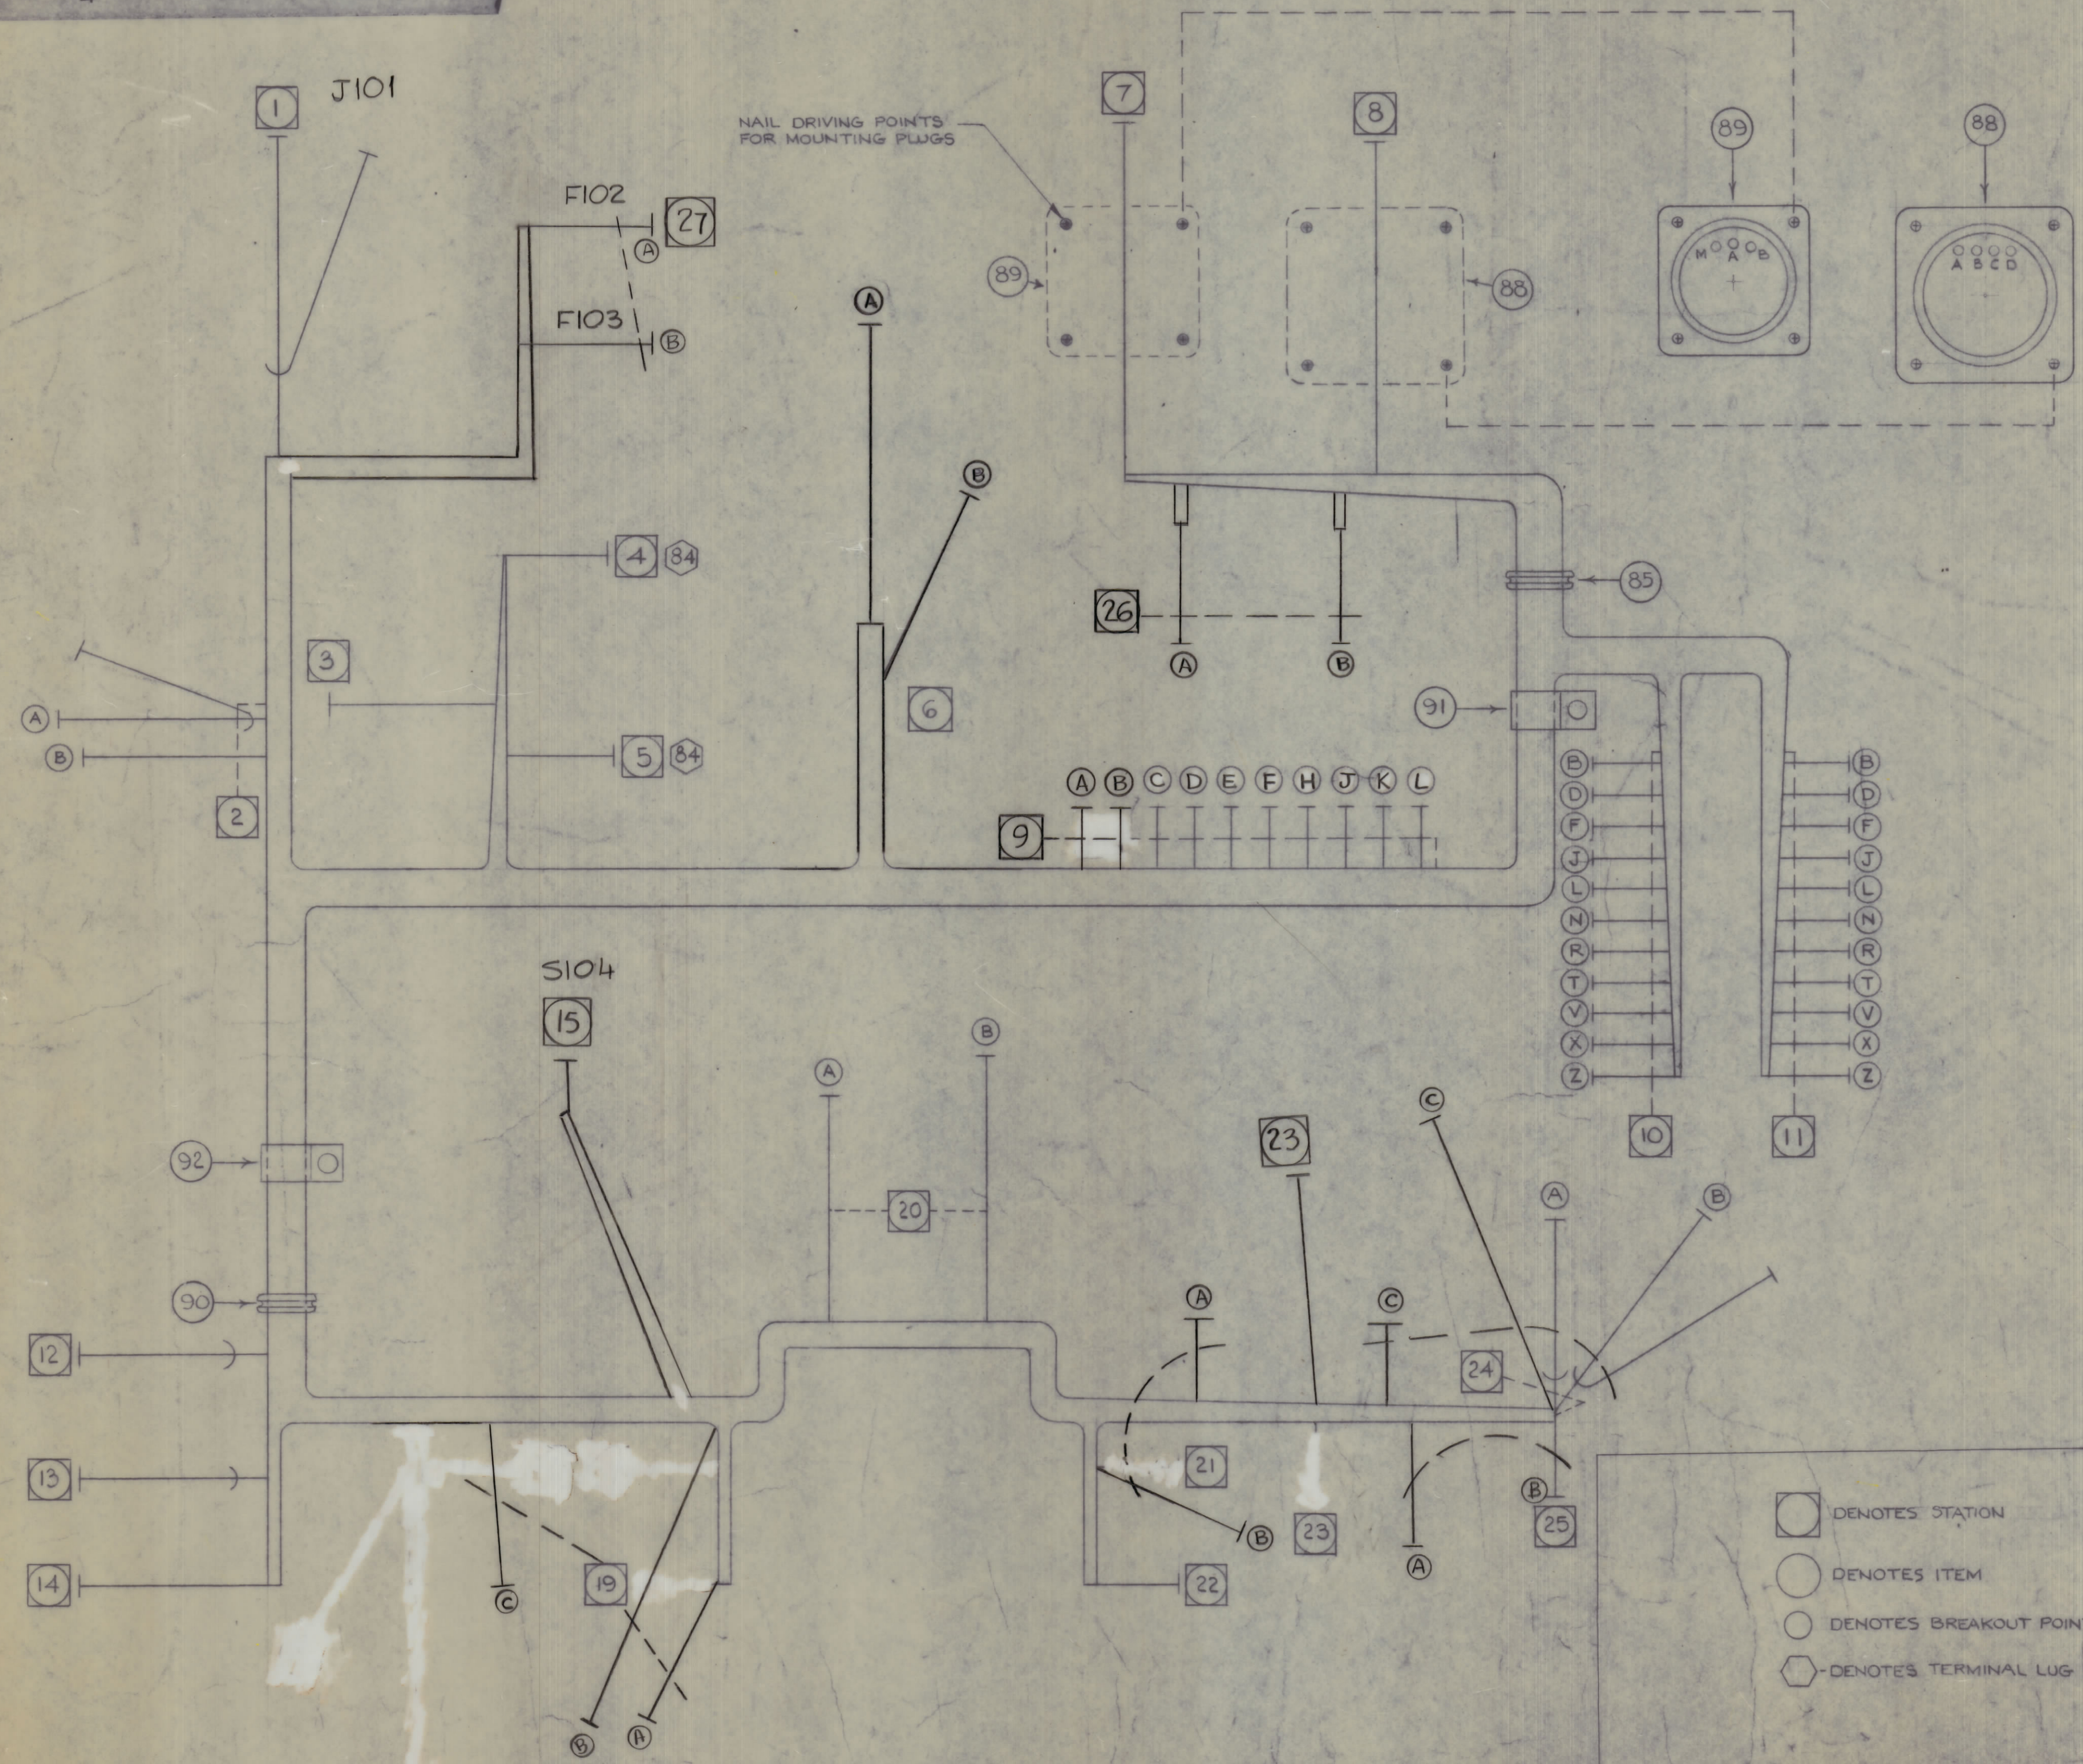

- DENOTES STATION
- DENOTES ITEM
- DENOTES BREAKOUT POINT
- ⬡ DENOTES TERMINAL LUG

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
S.D.				
LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE	
RTPR-1YA AX5161			WIRING HARNESS, BRANCHED	
QTY	UNIT	MODEL USED ON	APP'T. NO.	
		CODE		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN	DATE
TOLERANCES			CHECKED	DATE
DECIMALS ± .005			FINAL APPROVAL	
FRACTIONS ± 1/64			DATE	
ANGLES ± 30'			DATE	
REVISIONS			REVISIONS	
REVISIONS			REVISIONS	

NOTES

CA1671