


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL, SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

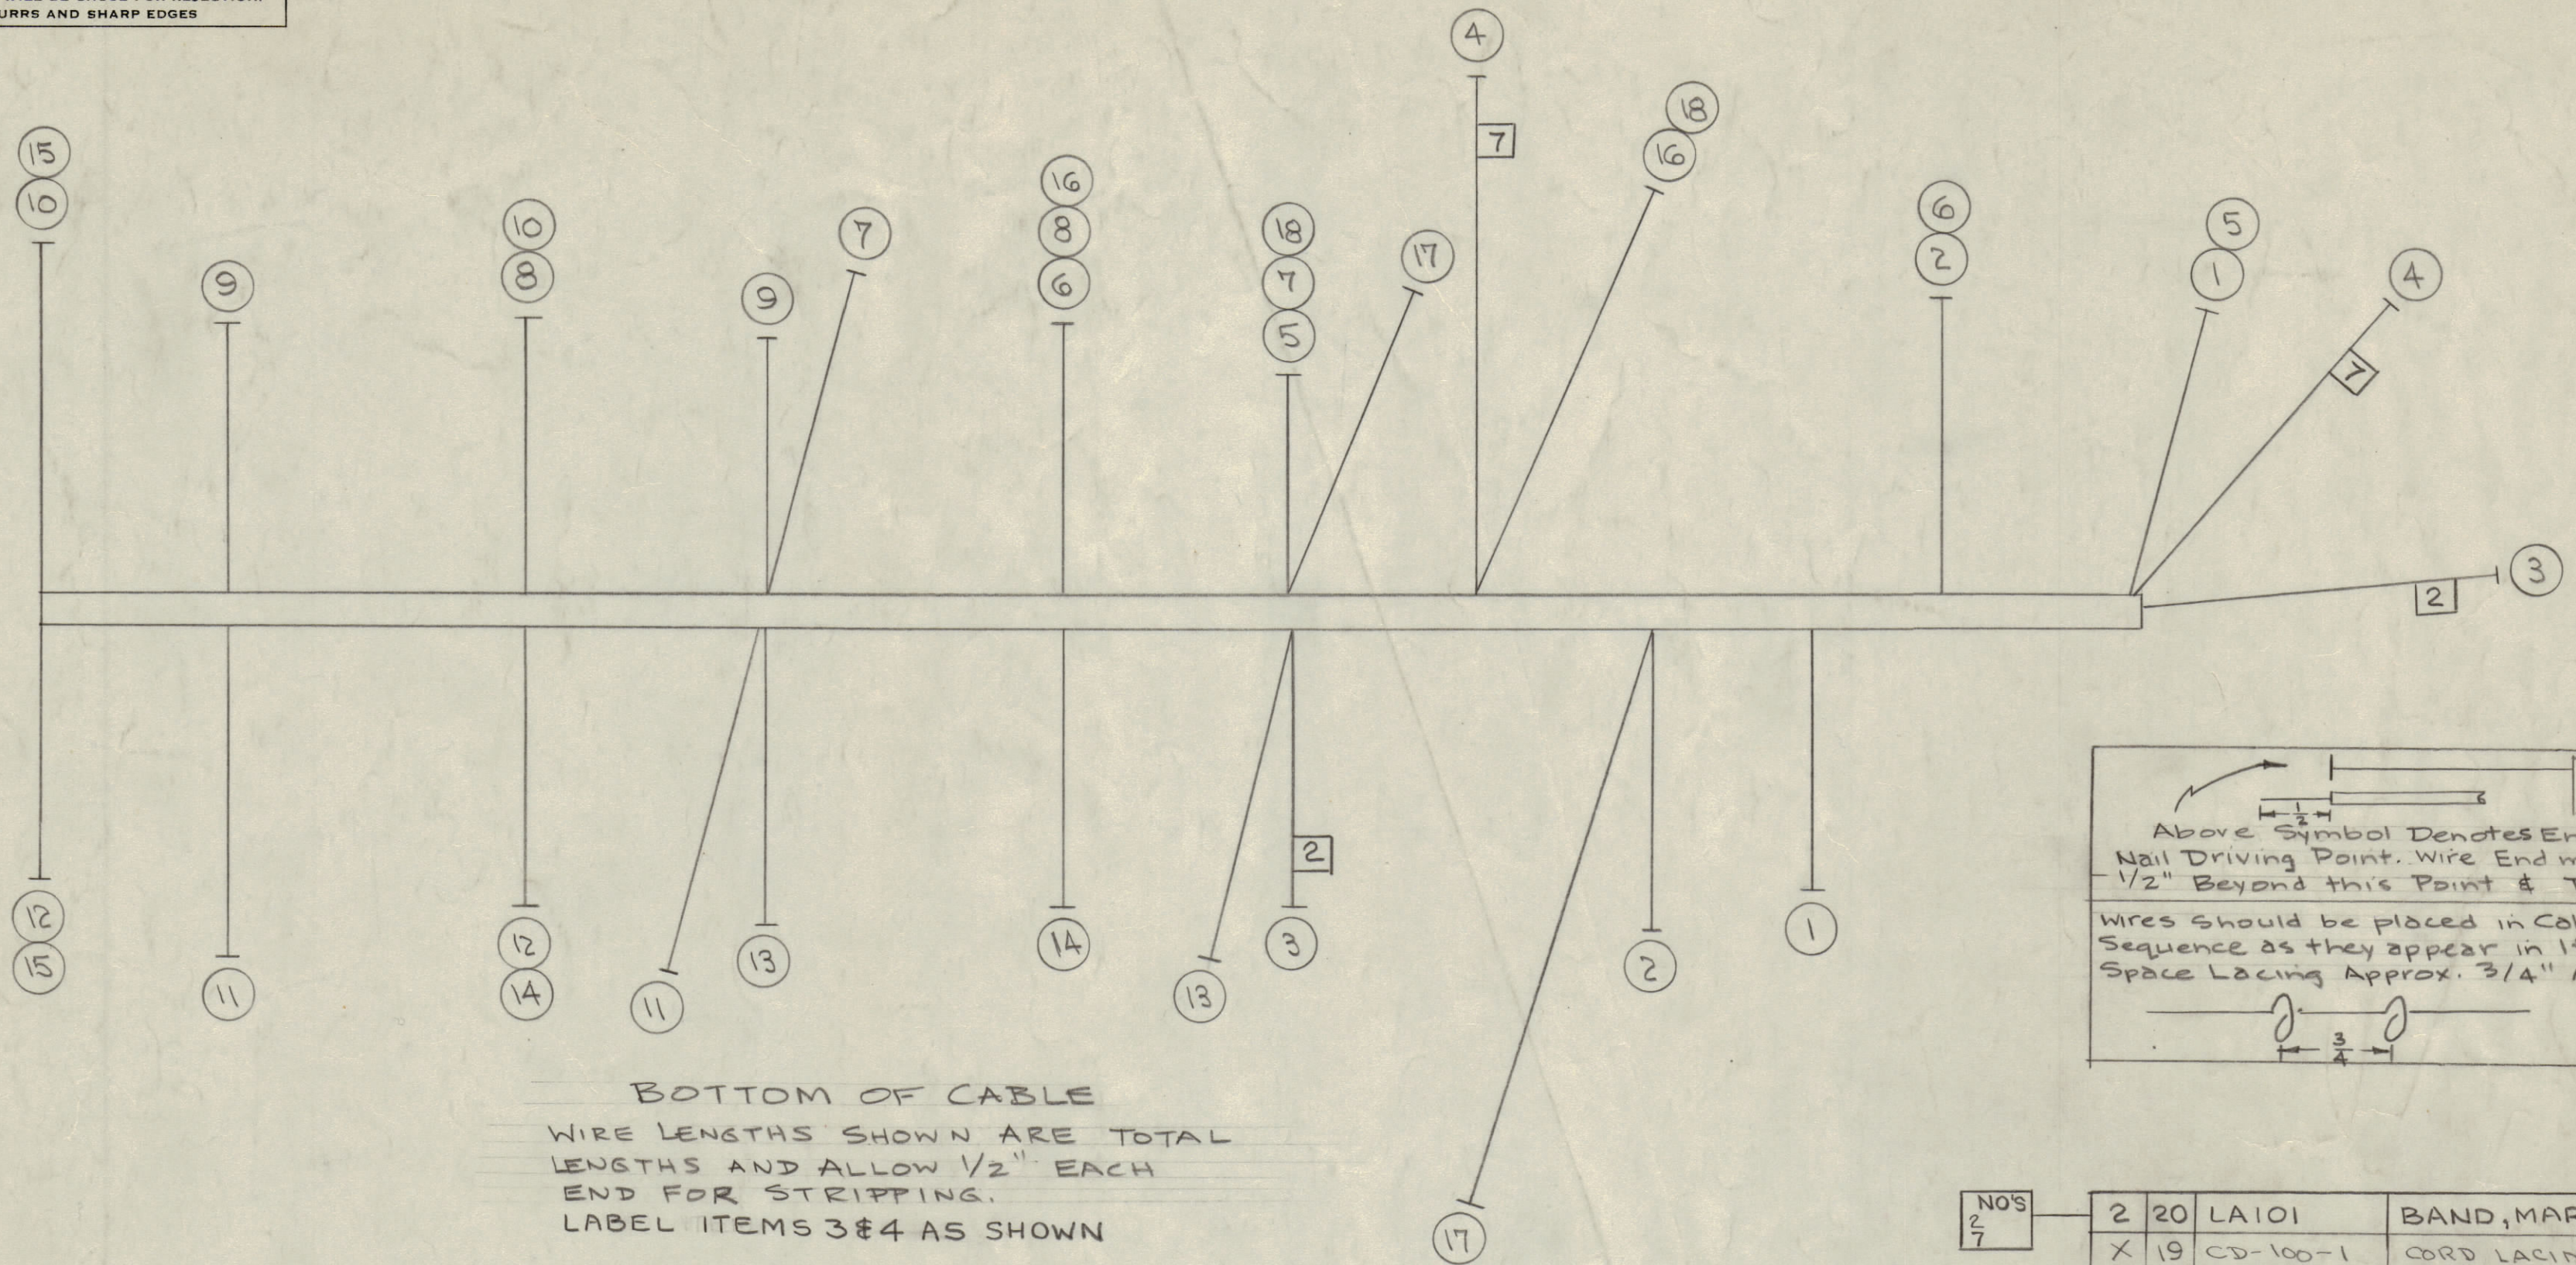

Above Symbol Denotes End of Insulation & Nail Driving Point. Wire End must be Stripped 1/2" Beyond this Point & Tinned 3/8".

Wires should be placed in Cable in Numerical Sequence as they appear in Item Column. Space Lacing Approx. 3/4" Apart.

CA-226 D

RSC-2

ITEM	CONNECT FROM	TO
1	Pin 4 & 5 of V7	Pin 4 & 5 of V8
2	Pin 9 of V7	Pin 9 of V8
3	Pin 2 of R51	Pin 4 & 5 of V1
4	Pin 7 of R51	Pin 7 of J5
5	Pin 4 & 5 of V7	Pin 4 & 5 of V2
6	Pin 9 of V7	Pin 9 of V2
7	Pin 4 & 5 of V2	Pin 4 & 5 of V6
8	Pin 9 of V2	Pin 9 of V6
9	Pin 4 & 5 of V6	Pin 4 & 5 of V4
10	Pin 9 of V6	Pin 9 of V4
11	Pin 4 & 5 of V5	Pin 4 & 5 of V3
12	Pin 9 of V3	Pin 9 of V5
13	Pin 4 & 5 of V1	Pin 4 & 5 of V5
14	Pin 9 of V5	Pin 9 of V1
15	Pin 9 of V4	Pin 9 of V3
16	Pin 9 of V2	Pin 1, 4, & 6 of J5
17	Pin 2 of J5	I4
18	Pin 3 & 8 of J5	Pin 4 & 5 of V2

RSC-3

ITEM	CONNECT FROM	TO
1	Pin 4 & 5 of V7	Pin 4 & 5 of V8
2	Pin 9 of V7	Pin 9 of V8
3	Pin 2 of R51	Pin 4 & 5 of V1
4	Pin 7 of R51	Pin 7 of J5
5	Pin 4 & 5 of V7	Pin 4 & 5 of V2
6	Pin 9 of V7	Pin 9 of V2
7	Pin 4 & 5 of V2	Pin 4 & 5 of V4
8	Pin 9 of V2	Pin 9 of V4
9	Pin 4 & 5 of V4	Pin 4 & 5 of V6
10	Pin 9 of V4	Pin 9 of V6
11	Pin 4 & 5 of V3	Pin 4 & 5 of V5
12	Pin 9 of V5	Pin 9 of V3
13	Pin 4 & 5 of V1	Pin 4 & 5 of V3
14	Pin 9 of V3	Pin 9 of V1
15	Pin 9 of V6	Pin 9 of V5
16	Pin 9 of V2	Pin 1, 4, & 6 of J5
17	Pin 2 of J5	I4
18	Pin 3 & 8 of J5	Pin 4 & 5 of V2

NO'S	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	20	LA101		BAND, MARKER, CABLE	
X	19	CD-100-1		CORD LACING, NYLON	
7	18	MWC22(7)U		CABLE, INSULATED, STRANDED	Brn.
10 1/4	17		91		White
9	16		91		Brn.
5 1/2	15		91		White
8 1/2	14		91		Brn.
9	13		1		White
8 1/4	12		91		Brn.
9 3/4	11		1		White
8 3/4	10		91		Brn.
8 1/2	9		1		White
8 1/2	8		91		Brn.
8 1/2	7		1		White
11	6		91		Brn.
10 1/4	5		1		White
7	11 3/4	4	91		Brn.
2	11 1/4	3	1		White
	7 1/2	2	91		Brn.
	7 1/4	1	1		White

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:

THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
D	3	(1) ADD. TO CALLOUT (1), (2) TO (3)	9.2.54	12232	KB	ML	
C	1	(2) ADD. TO IT. 3; LABEL NOTE ADD. IT. 20 ADD. (7) ADD. TO IT. 4					
B	1	Connection Chart for RSC-3 Added - Wires chgd to MWC. Symbol Chart Added	10/1/58	470	6		
A	1	ITEM 16 WAS 934	12/1/54	2	15		
A	1	WIRE LENGTHS ADDED	1-12-54	1	RB		

TOLERANCES	SCALE:
ALL OTHERS	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

NO.	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
1	RSC-3			10-11-58
1	RSC-2	170		11-17-54

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
7	11 3/4	4	91	White
2	11 1/4	3	1	Brn.
	7 1/2	2	91	White
	7 1/4	1	1	Brn.