


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.  
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

12	75	WI-101-4	CABLE, SHIELD, FLEX	
X	76	CD-100-1	LACING CORD	
X	77	PX-100-1	SLEEVING, INSULATION	
9	78	SRIR <sup>3/8</sup> 17122U33	CABLE, INSULATED	OR.
11	79	SRIR <sup>3/8</sup> 1722U96	CABLE, INSULATED	WH/BL

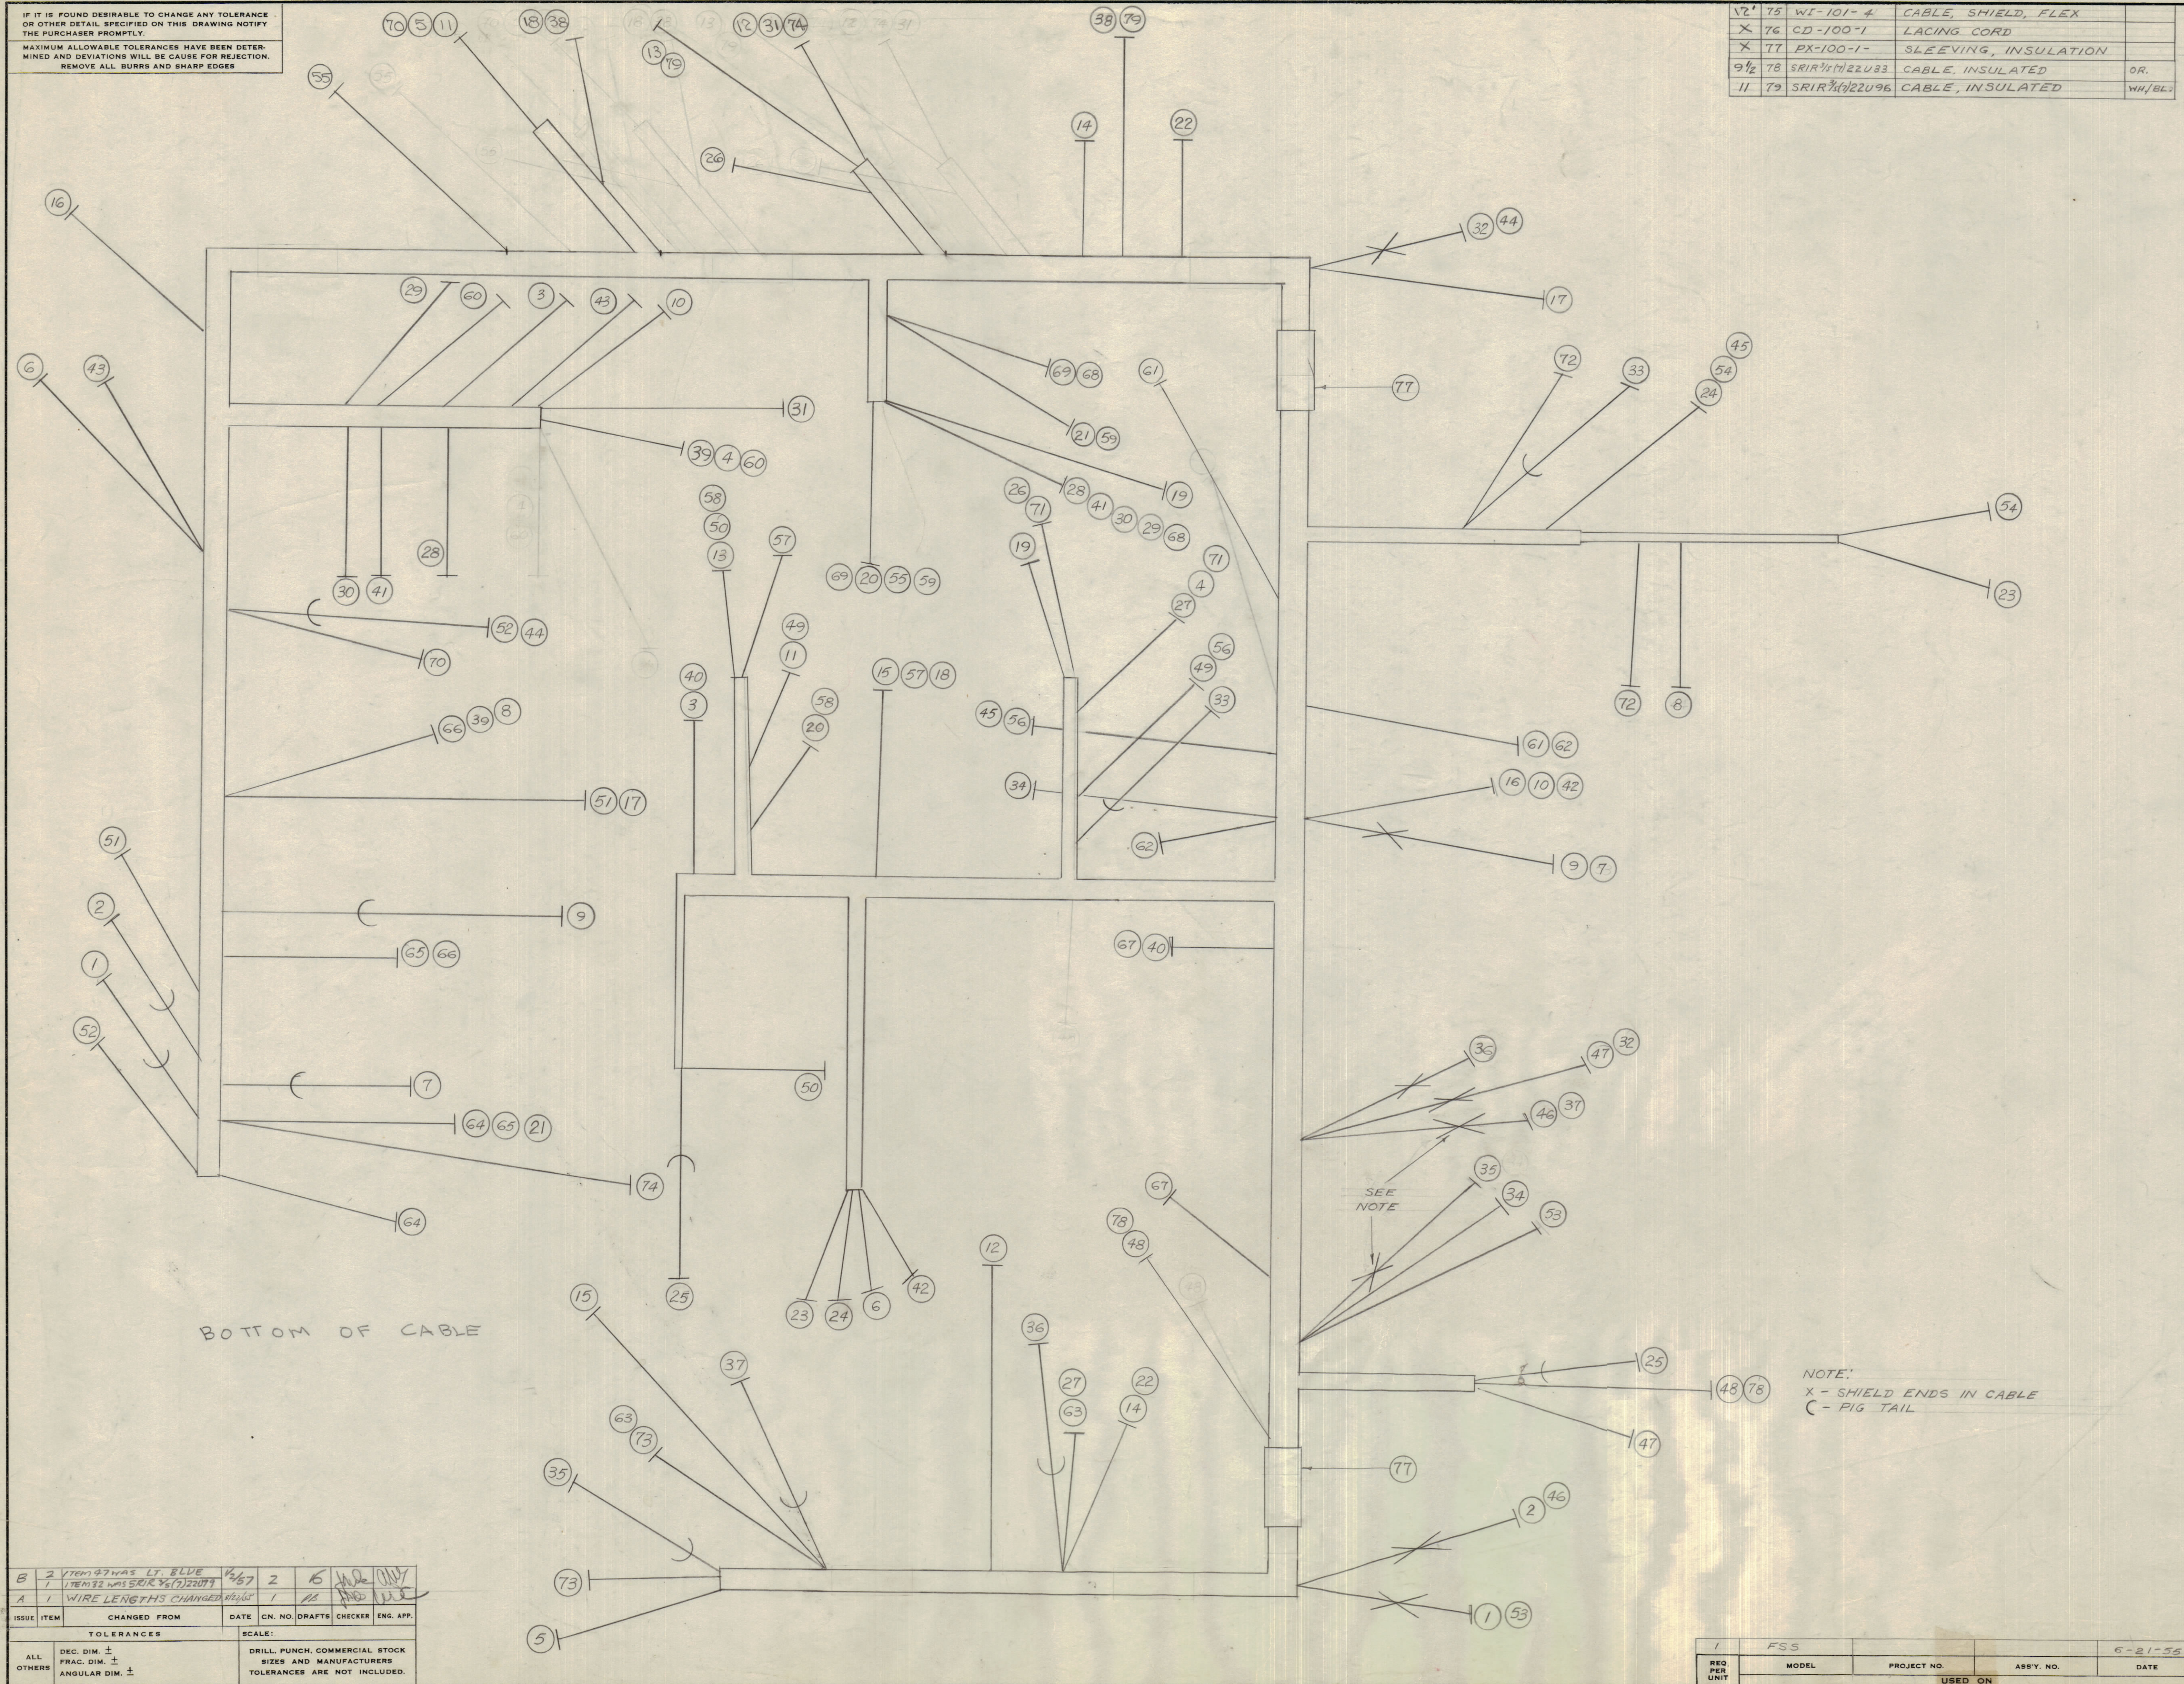

29	74	SRIR <sup>3/8</sup> 1722U96	CABLE, INSULATED	PINK.
6	73			BRN.
7	72			BLK.
5	71			BRN.
17	70			WH-RED
6	69			PINK
6	68			PINK
8	67			WH-BRN
8	66			BRN.
8	65			BRN.
7	64			BRN.
8	63			BRN.
7	62			WH-GRN
8	61			GREEN
7	60			BRN.
7	59			WH-RED
5	58			WH-BL
9	57			LT. BLUE
11	56			WH-RED
9	55			RED
9	54			YELL.
10	53			RED
13	52			WHITE
10	51			YELL.
10	50			WH-BL
10	49			WH-RED
9	48			YELL.
12	47			BLUE
12	46			BLUE
13	45	SRIR <sup>3/8</sup> 1722U33	CABLE, INSULATED	OR.
25	44	WI-101-4	CABLE, SHIELD FLEX	WHITE
11	43	SRIR <sup>3/8</sup> 1722U88	CABLE, INSULATED	GRAY
14	42			VIO.
20	41			BLUE
11	40			WH-BRN.
14	39			LT. BLUE
13	38			LT. BLUE
18	37			RED SHIELD
14	36	SRIR <sup>3/8</sup> 1722U55	CABLE, INSULATED	GREEN SHIELD
17	35	WI-101-4	CABLE, SHIELD FLEX	WHITE
14	34	SRIR <sup>3/8</sup> 1722U55	CABLE, INSULATED	GREEN
16	33	WI-101-4	CABLE, SHIELD FLEX	WHITE
18	32	WI-101-4	CABLE, " "	WHITE
22	31	SRIR <sup>3/8</sup> 1722U96	CABLE, INSULATED	PINK
19	30			YELL.
18	29			YELL.
20	28			BLUE
20	27			BROWN
22	26	SRIR <sup>3/8</sup> 1722U44	CABLE, INSULATED	YELL.
24	25	WI-101-4	CABLE, SHIELD FLEX	WHITE
21	24	SRIR <sup>3/8</sup> 1722U55	CABLE, INSULATED	GREEN
24	23			WH-GRN.
25	22			OR.
26	21			RED
25	20			RED
25	19			WH-BL
27	18			LT. BLUE
28	17			LT. BLUE
27	16			YELL.
27	15			GRAY
26	14			LT. BLUE
26	13			WH-OR.
28	12			WH-BL
33	11			PINK
29	10			WH-RED
31	9			VIO.
37	8			WH-BL
33	7			GREEN SHIELD
39	6			WHITE
38	5			WH-RED
35	4			BROWN
37	3			BROWN
45	2			BLUE SHIELD
45	1	SRIR <sup>3/8</sup> 1722U22	CABLE, INSULATED	RED SHIELD

NOTE:  
 X - SHIELD ENDS IN CABLE  
 C - FIG TAIL

B	2	Item 27 was LT. BLUE	1/26/57	2	6	ADD ONLY	
A	1	Item 32 was SRIR 3/8 1722U33					
A	1	WIRE LENGTHS CHANGED					
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES							
SCALE:							
DRILL PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.							

1	FSS	PROJECT NO.	ASSY. NO.	6-21-55
REQ PER UNIT	MODEL	DATE	USED ON	

THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
CABLE ASSEMBLY			
FSS			
TYPE & TEMPER	16 6-21-55	WZ	WZ
HEAT TREAT. SPEC.			
CHECKED		FINAL APPROVAL	
		A. J. J.	
FINISH & SPEC. NO. CA-244 B			