


NOTE: PLACE ITEMS 23, 32, 37 IN CABLE LIST.

○ THIS SYMBOL DENOTES ITEM NUMBERS
 □ THIS SYMBOL DENOTES WIRE MARKERS

D	IT 23 & 32 P/N WAS S-9. IT 52 WAS CD100-2. CHG'D LEAD LENGTHS TO WHOLE NUMBERS	10-14-66	1704	RME	OFF	J
C	RELOC. SHIELD BREAKOUTS 37, 32	8-24-66	16779	RME	OFF	J
B	RELOC. IT 23, 37 BREAKOUTS	7-26-63	9639	RME	OFF	J
A	ITEM 1 (8) LEAD STRENGTHENED BY 5/4					
TOLERANCES DEC DIM ± FRAC DIM ± ANGULAR DIM ±						
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES						

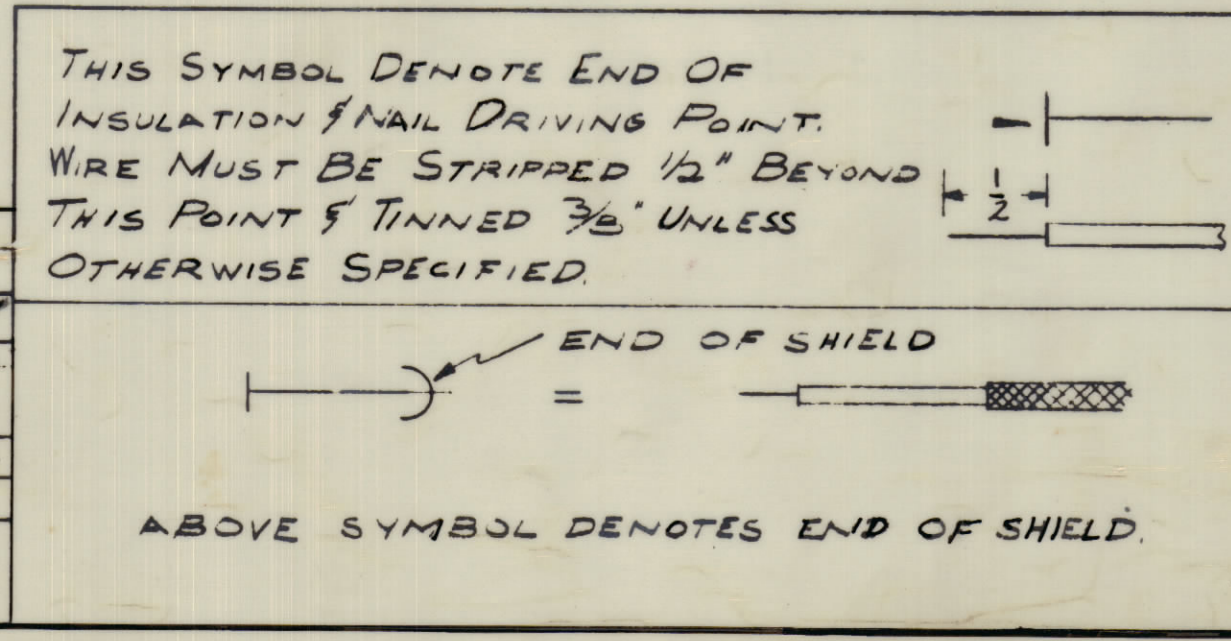

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN

SPACE LACING APPROX. 3/4" APART.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
2	53	LA-101	MARKER, WIRE
X	52	CD-101-1 MW	CORD, LACING
16	51	MWC 22(7)U-94	CABLE, INSULATED
20	50	20(7)U-1	
20	49	20(7)U-91	
27	48	22(7)U-5	
21	47	20(7)U-1	
21	46	20(7)U-91	
22	45	18(10)U-0	
27	44	18(6)U-0	
12	43	20(7)U-0	
50	42	22(7)U-92	
22	41	22(7)U-2	
32	40	22(7)U-95	
25	39	22(7)U-5	
11	38	MWC 22(7)U-92	CABLE, INSULATED
1	37	CA-270	CABLE, LIMITER
10	36	MWC 22(7)U-92	CABLE, INSULATED
11	35	U-92	
15	34	U-4	
17	33	U-9	
11	32	SJ9	SHIELDED WHITE
25	31	U-4	YELLOW
16	30	U-2	RED
16	29	U-2	RED
8	28	U-2	RED
9	27	U-2	RED
19	26	U-2	RED
14	25	U-2	RED
11	24	U-92	WH/RED
28	23	SJ9	SHIELDED WHITE
21	22	U-4	YELLOW
16	21	U-92	WH/RED
24	20	U-92	WH/RED
19	19	U-92	WH/RED
29	18	U-93	WH/OR
30	17	U-3	ORANGE
42	16	U-4	YELLOW
6	15	U-92	WH/RED
19	14	U-92	WH/RED
12	13	U-96	WH/BLUE
12	12	U-6	BLUE
20	11	U-2	RED
36	10	U-91	WH/BROWN
27	9	U-2	BROWN
21	8	U-92	WH/RED
33	7	U-92	WH/RED
29	6	U-3	ORANGE
20	5	U-9	WHITE
10	4	U-98	WH/GREY
15	3	U-8	GREY
13	2	U-8	GREY
44	1	MWC 22(7)U-93	CABLE INSULATED

THE TECHNICAL MATERIEL CORP.
 HAMARONECK, NEW YORK

CABLE, MAIN
 GPR-90 - RXD

DRAWN: JORILLO
 ELEC. DES. APP: PA.
 CHECKED: J. ALTONEN
 FINAL APPROVAL: J. ALTONEN

CA-544 D

JUL 31 1968

1	GPR 90RXD	5-2-60
MODEL	SECTION	ABBY. NO.
DATE	USED ON	