



REVISIONS							
E.M.N.NO	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE	APPROVED
				X	EXP. RELEASE	5/25/70	
				X	CLARIFIED	5/25/70	
				Ø	ORIGINAL RELEASE FOR PRODUCTION	4/24/70	

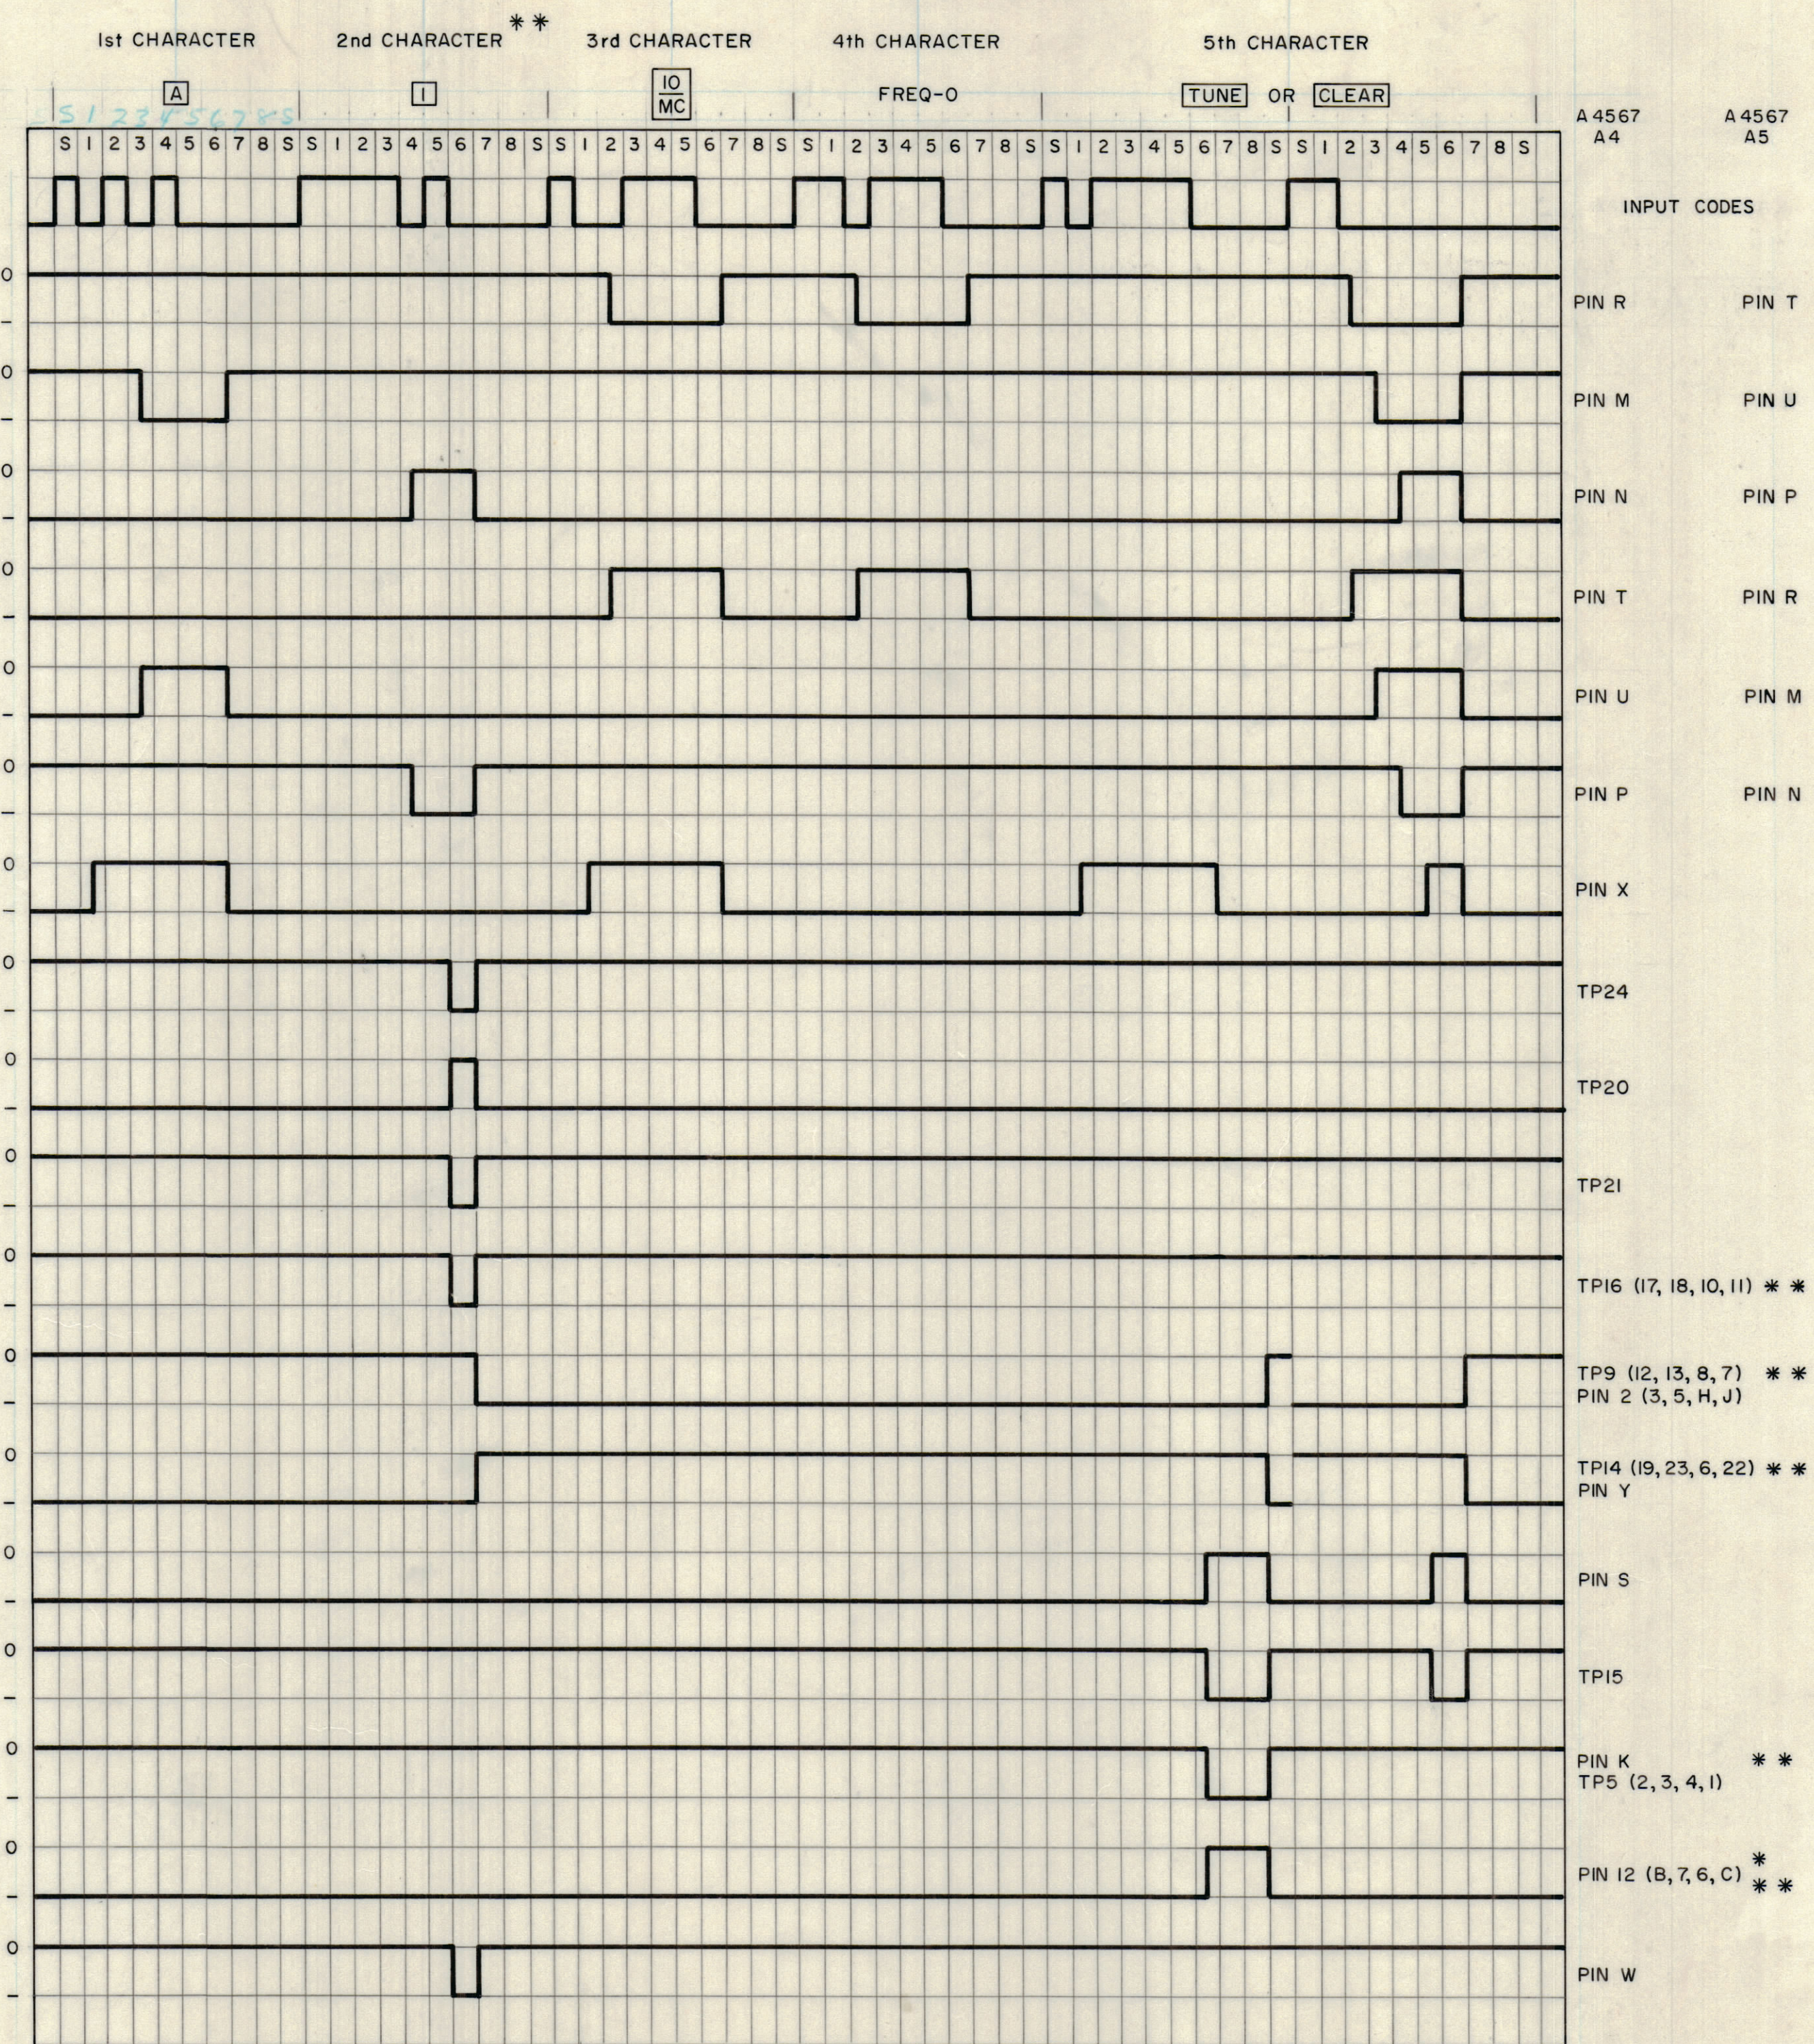

* PULSE IS SEEN WHEN TERMINATED WITH A 1.2 KΩ RESISTOR TO -12V

** THE SECOND (2nd) CHARACTER SHOULD BE SELECTED TO CORRESPOND TO THE PROPER NUMBER DECODER BEING PROGRAMMED

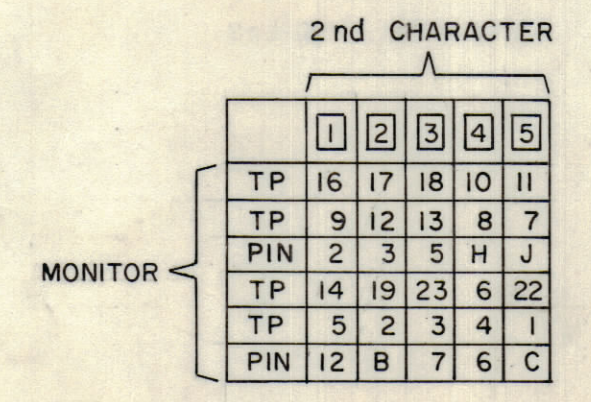

PINS A, Z, I, 22 (GND)
 PIN 4 (-12V SUPPLY)
 PIN 20 (+12V SUPPLY)
 PINS V, 21 (NOT USED)
 PIN 11 (REFER TO INITIAL RESET PULSE SHEET 1)

58%

FIG-4-13 SHS

RTMU		A4567
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		
MATERIAL		
FINISH		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON
 DECIMALS .X ± .05
 .XX ± .01
 .XXX ± .005

FRACTIONS ± 1/64
 ANGLES ± 0° -30'

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
FINAL APPROVAL		DATE	THE TECHNICAL MATERIEL CORP.	
MECH. DES.		DATE	MAMARONECK, NEW YORK	
ELECT. DES.		DATE	TIMING CHART A4, A5	
CHECKED		DATE	RTMU - 41, 42	
DRAWN		DATE	SIZE CODE IDENT NO. DWG NO.	
			D 82679	CH 802
			SCALE	SHEET 3 OF 10

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown herein without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.