


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL. TO PROD	SEPT 16-69		J.G.P		
A		CR4 WAS IN 758A Q5 & Q6 WERE 2N304 CR11 ADDED R3 WAS 27K	12 MAR 1970	737	MS		
B		REV PER CEMN	30 MAR 70	752	P.S.		
C		REV PER CEMN	8 APR 70	758	PJ		
D		REV AS PER CEMN	23 APR 1970	769	A		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

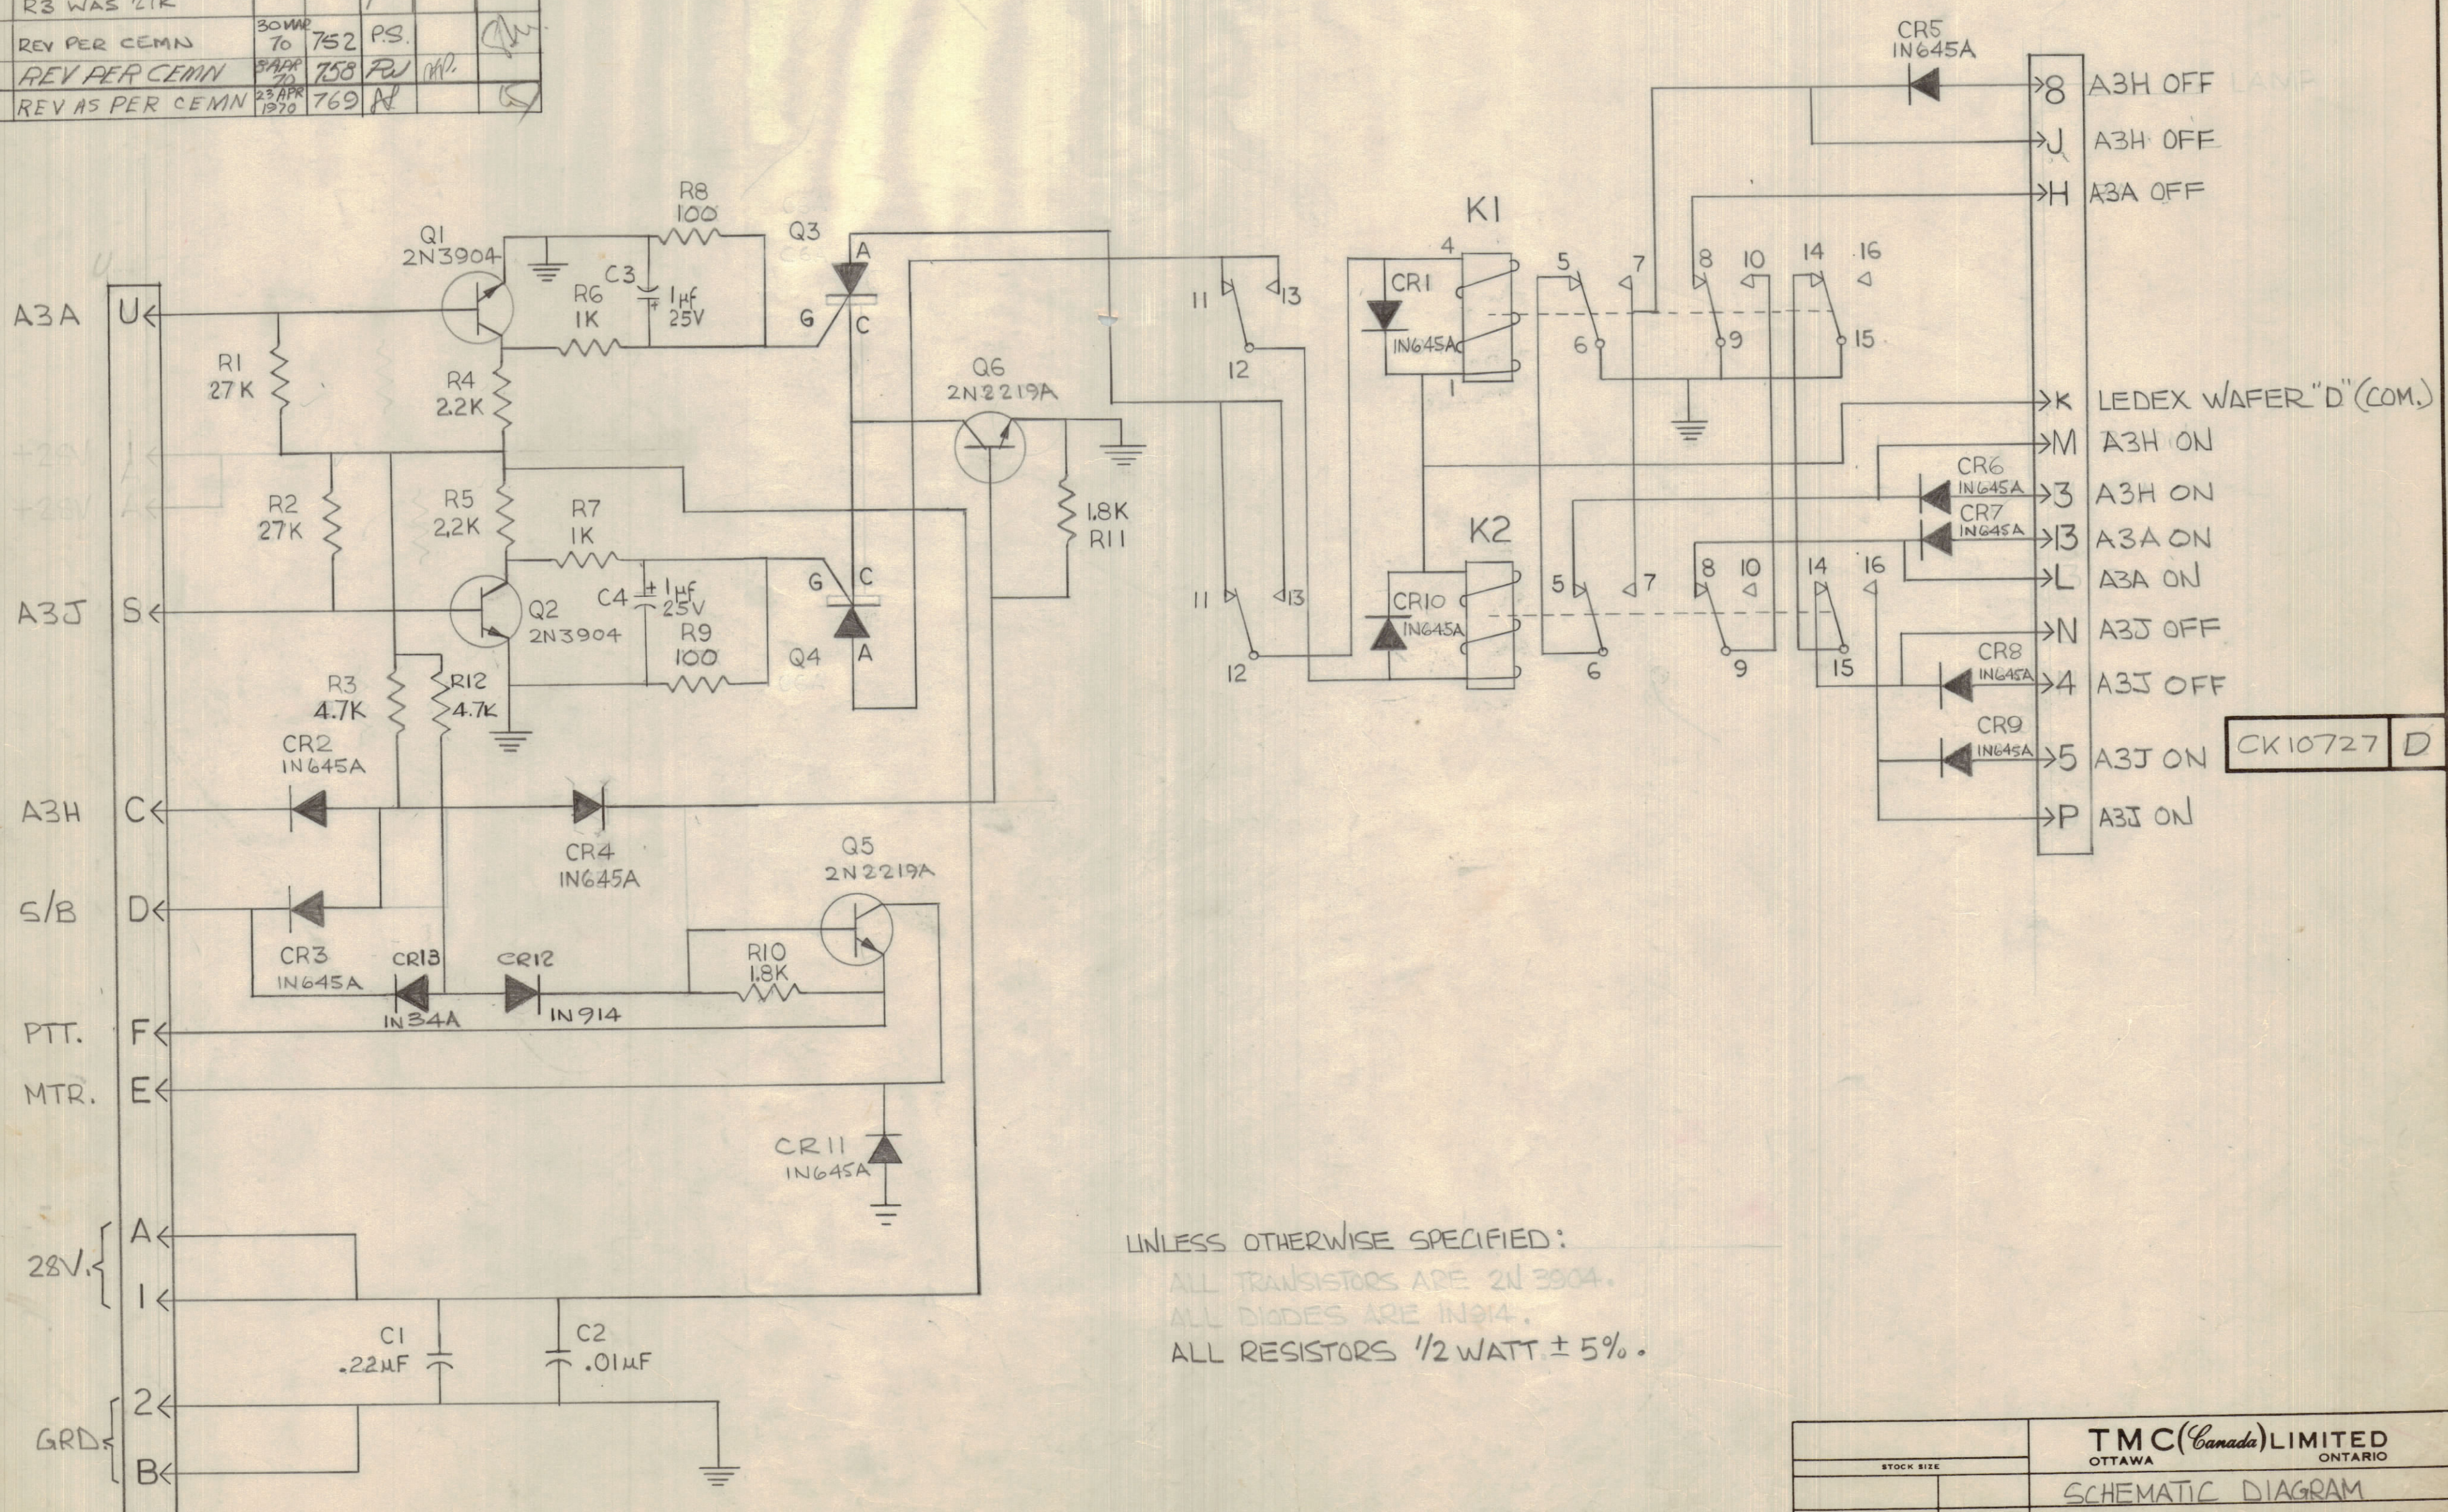

UNLESS OTHERWISE SPECIFIED:  
 ALL TRANSISTORS ARE 2N3904.  
 ALL DIODES ARE 1N914.  
 ALL RESISTORS 1/2 WATT ± 5%.

ALL COMPONENTS ARE 800 SERIES

TOLERANCES	SCALE
DEC. DIM. ± .05	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
FRAC. DIM. ± 1/64	
ANGULAR DIM. ± 0° 30'	

MCU-16	085-69	10727	SEPT 16-69
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

TMC (Canada) LIMITED OTTAWA ONTARIO			
SCHEMATIC DIAGRAM MODE SELECTOR BOARD			
R. HAMILTON			
DRAWN	ELEC. DES. APP.	MECH. DES. APP.	
HEAT TREAT. SPEC.		FINAL APPROVAL	
CHECKED		CK10727 D	