


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENG RELEASE	Nov 13/70		dep	S.T	
X1		R6 WAS 1/4W R2 WAS 2.7	April 24/71		dep	S.T	

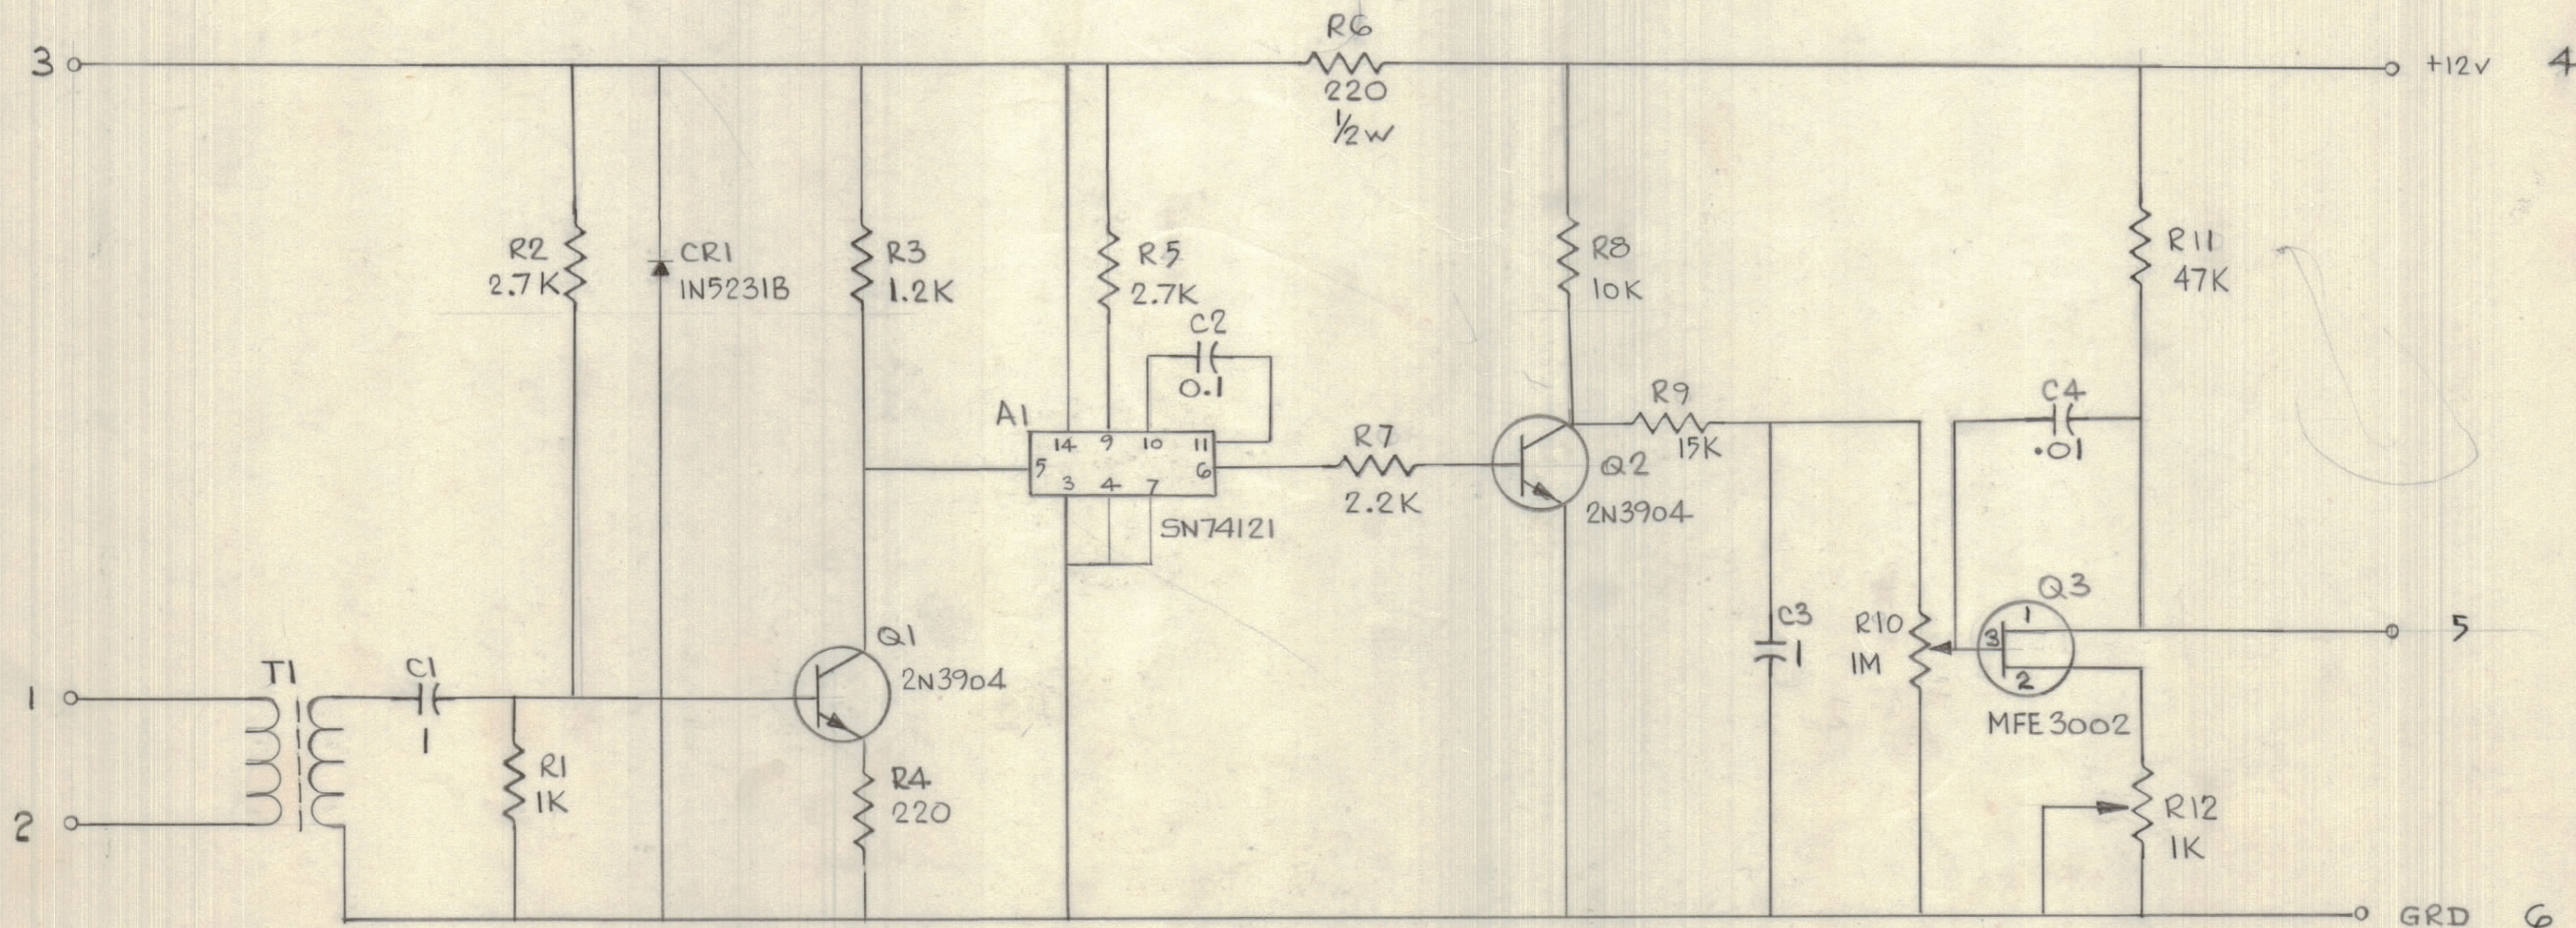

CK10798 X1

UNLESS OTHERWISE STATED:-
RESISTANCE IN OHMS, 1/4W
CAPACITANCE IN μF.

REF. ASSY A10942-5

TOLERANCES			SCALE:
ALL OTHERS	DEC. DIM. ±	.X+.05	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
	FRAC. DIM. ±	.XX+.01	
	ANGULAR DIM. ±	.XXX+.008	

MODEL	PROJECT NO.	ASSY. NO.	DATE
	120-1/70	A10942-6	12 Nov 70

TMC (Canada) LIMITED OTTAWA ONTARIO			
STOCK SIZE		REMOTE CLARIFIER	
MATERIAL		WEIGHT PER PC.	
TYPE & TEMPER		PROCTOR	
		DRAWN	ELEC. DES. APP.
		S. TOKUDA	MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CK10798 X1	