


REVISIONS							
E.M.N.NO	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE	APPROVED
GE	1			X	EXP. RELEASE	7/19/69	
00				0	ORIGINAL RELEASE FOR PRODUCTION	7/18/69	

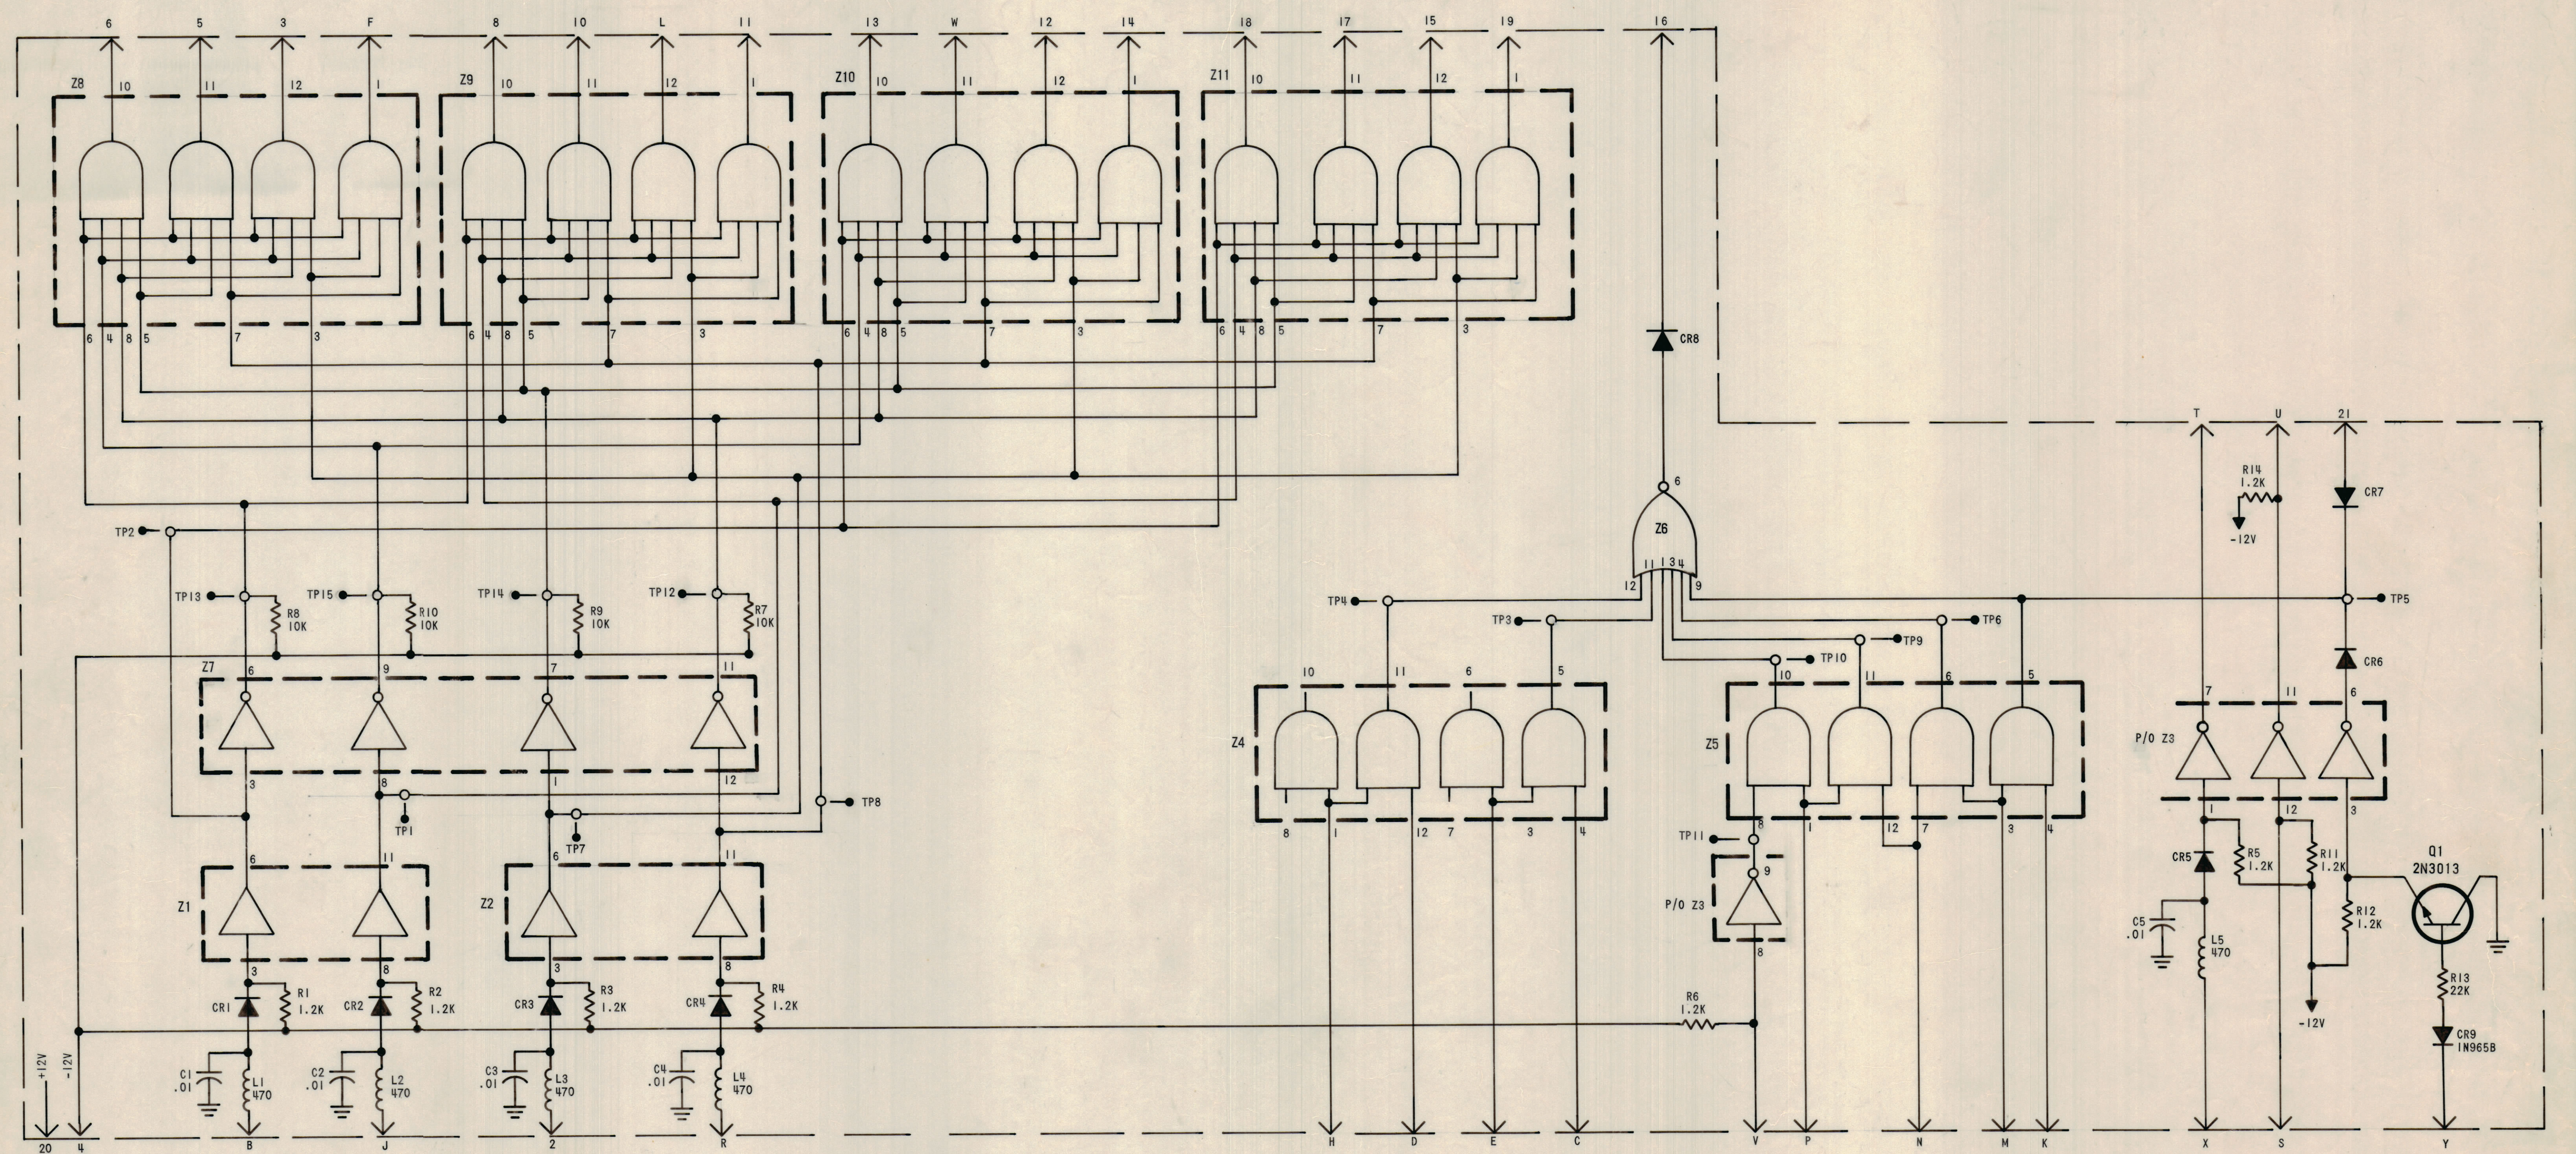

UNLESS OTHERWISE SPECIFIED:

- ALL RESISTANCE VALUES ARE IN OHMS, 1/4 WATT
- ALL CAPACITANCE VALUES ARE IN MICROFARADS
- ALL INDUCTANCE VALUES ARE IN MICROHENRIES
- ALL DIODES ARE 1N914

NOTE:

- PARTIAL REFERENCE DESIGNATIONS ARE SHOWN; FOR COMPLETE DESIGNATION, PREFIX WITH UNIT NUMBER AND SUB-ASSEMBLY DESIGNATION(S) AS APPLICABLE

MODULE VOLTAGE & GND CHART			
SYMBOL	PIN CONNECTIONS		
	+12V	-12V	GND
Z1, Z2		2	5
Z3, Z7	10		5
Z4, Z5		2	
Z6	10	2	5
Z8 THRU Z11		2	

LAST SYMBOL	MISSING SYMBOL
C5	
CR9	
L5	
R14	
TP15	
Z11	

PC363/A4571

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
FINAL APPROVAL		DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK DIAGRAM SCHEMATIC LEDEX DRIVE INPUT GATING CIRCUIT	
MECH. DES.		DATE		
ELECT. DES.		DATE		
CHECKED		DATE		
DRAWN		DATE	SIZE CODE IDENT NO. DWG NO. ISSUE D 82679 CK 1602	
MATERIAL		SCALE SHEET OF		
FINISH				

I	RTTD-4	A4571
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		
<small>NOTICE TO PERSONS RECEIVING THIS DRAWING</small> <small>THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown herein without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.</small>		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON

DECIMALS	FRACTIONS
X ± .05	± 1/64
XX ± .01	ANGLES ± 0°-30'
XXX ± .005	