


SAME MOUNTING  
OPPOSITE END.

— SCHEMATIC —

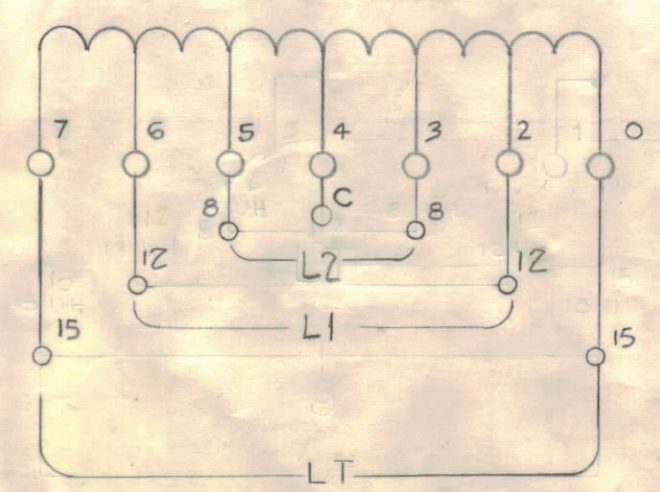

— SPECIFICATIONS —

CURRENT CAPACITY-30 AMPS MAX.  
 COIL - COPPER, SILVER PLATED  
 LT- 30uh ± 10%  
 L1- 24uh ± 10%  
 L2- 16uh ± 10%  
 Q- 350 ± 10%  
 TEST FREQ. - 2.5 MC

DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
COIL TERMINALS RE-LOCATED	9-14-66	16830	WJY		
CONN #1 DEL. CONN 4 WAS 5	9-26-66	16830	WJY	JANDE	
SPEC'S & SCHEMATIC REVISED, FINISH WAS GOLD PLATED	1-2-67	6140	E.L.		
Contacts Revised + Reversed, #8 Contact deleted	12-29-60	3771	RL	JCB	
MODIFIED	10-17-60	3213	RL		
SPEC. CLARIFIED	9/30/60	3114	WF		

SCALE: (DO NOT SCALE) 6A-1830

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.  
 REMOVE ALL BURRS AND SHARP EDGES

REQ PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	ACU			10-17-60
1	GPT-40K	AT-101	AC-112	7-26-60

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		COIL, RF. FINISH	
		ANTENNA	
		DJW	
		DRAWN	
		CHECKED	