


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED	
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.			
ISSUE	ITEM	CHANGED FROM	DATE
			CN. NO.
			DRAFTS
		CHECKER	ENG. APP.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

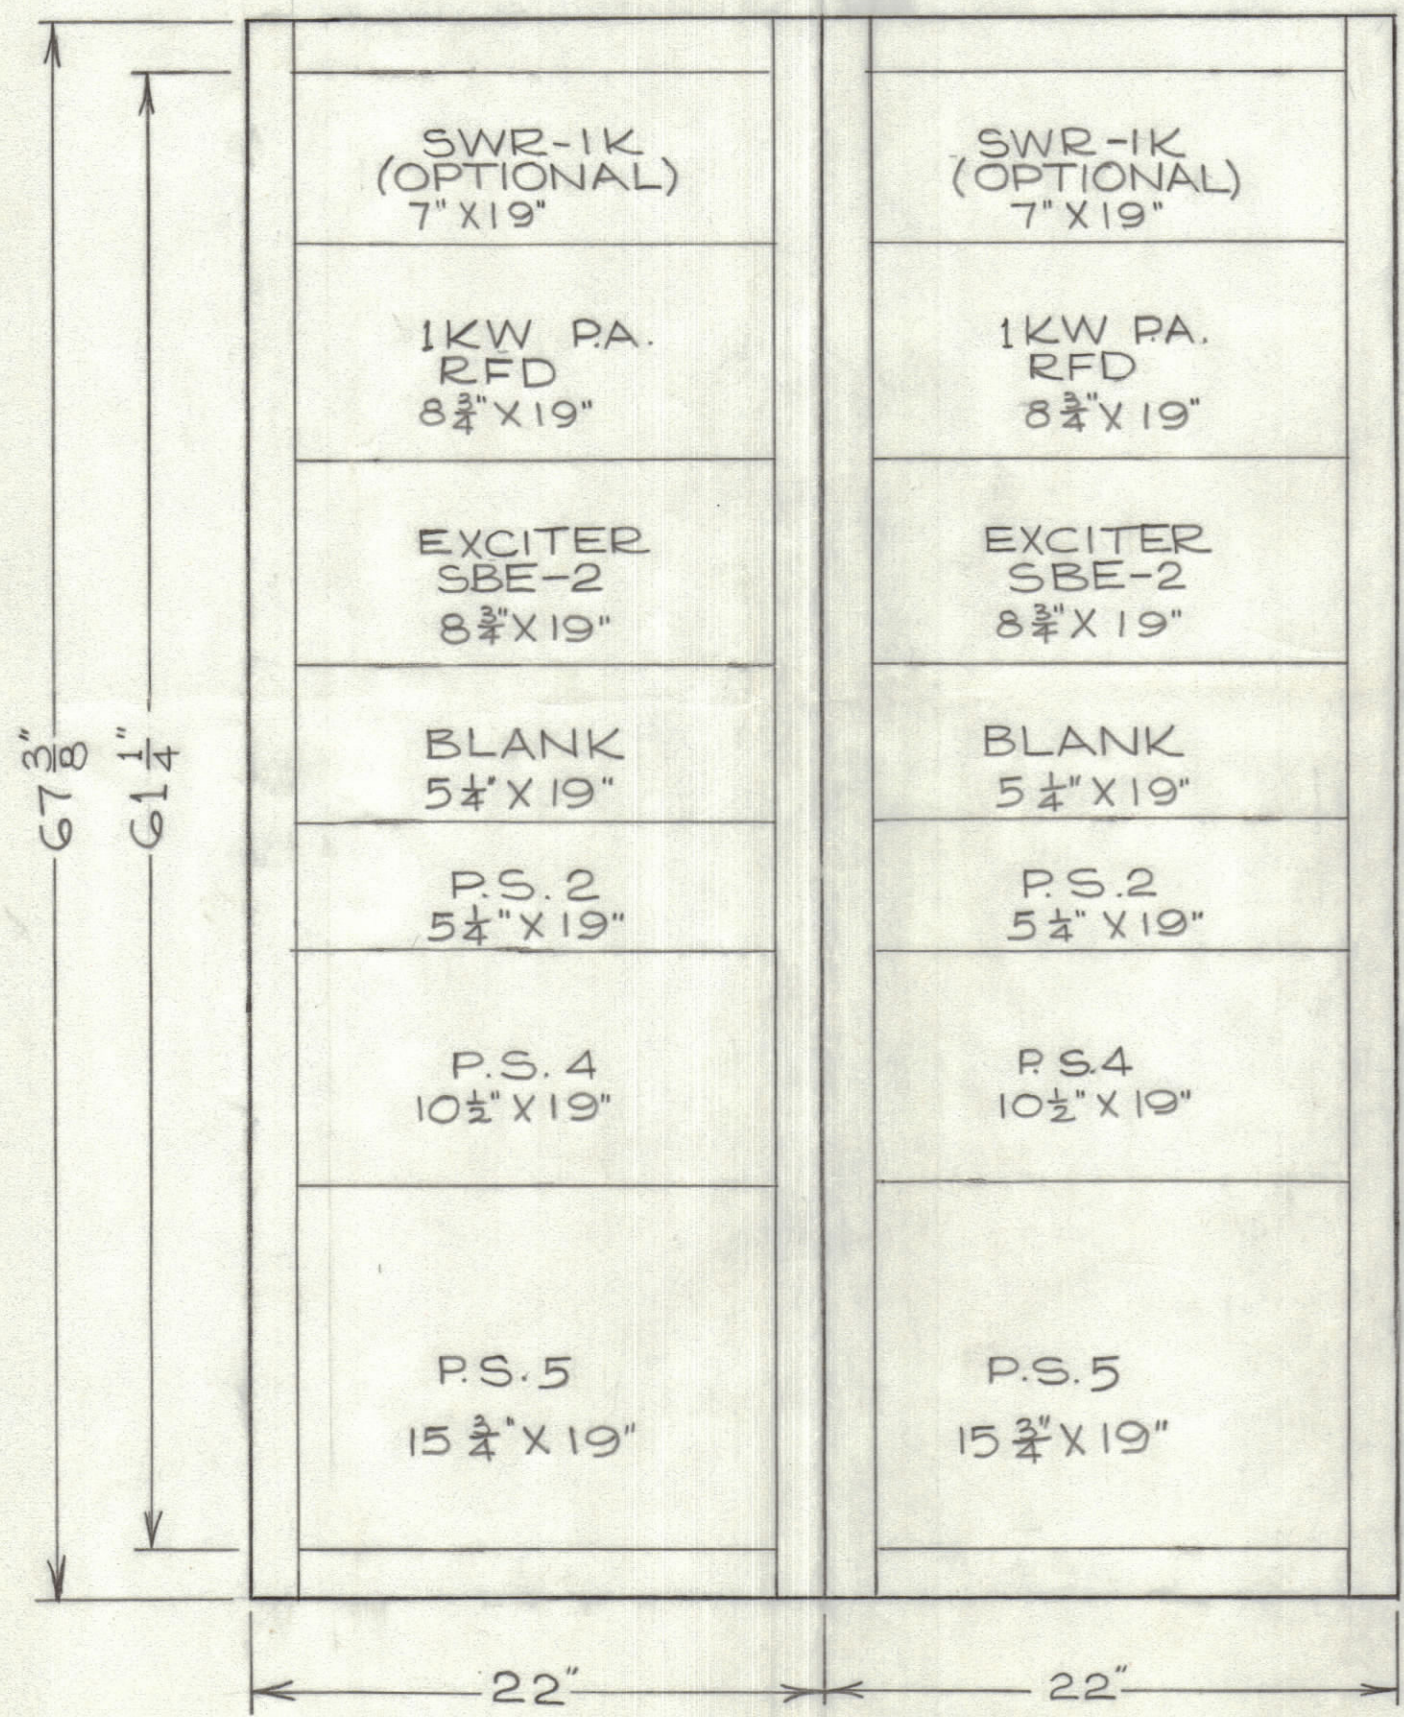

PROPOSED AT3 REPLACEMENT TRANSMITTER
 2-32 Mc/s - SSB - ISB - DSB - AM - CW
 SSB 1000 watts PEP (Nominal) at -40 DB IM
 CW (and P/S with external exciter) 1000 watts.
 A3-350 watts carrier with DSB
 Compatible AM-700 watts carrier and one sideband.

PROVIDES TWO INDEPENDENT, SIMULTANEOUS CHANNELS.

ID10262 \emptyset

CABINET
 To be fitted with filter and blower in rear doors.
 Depth of cabinet = 24 inches.
 Finish: Standard TMC grey.

TOLERANCES		SCALE:
ALL OTHERS	DEC. DIM. \pm FRAC. DIM. \pm ANGULAR DIM. \pm	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MODEL	PROJECT NO.	ASSY. NO.	DATE
			MAR. 21/62
USED ON			

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		AT3 REPLACEMENT TRANSMITTER	
TYPE & TEMPER	JPC	DRAWN	ELEG. DES. APP.
HEAT TREAT. SPEC.		CHECKED	MECH. DES. APP.
FINISH & SPEC. NO.		FINAL APPROVAL	
		ID10262 \emptyset	