


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	RSC-3 MOD KIT		LD-457

⊘ Note - Calibration Lines 18° Apart

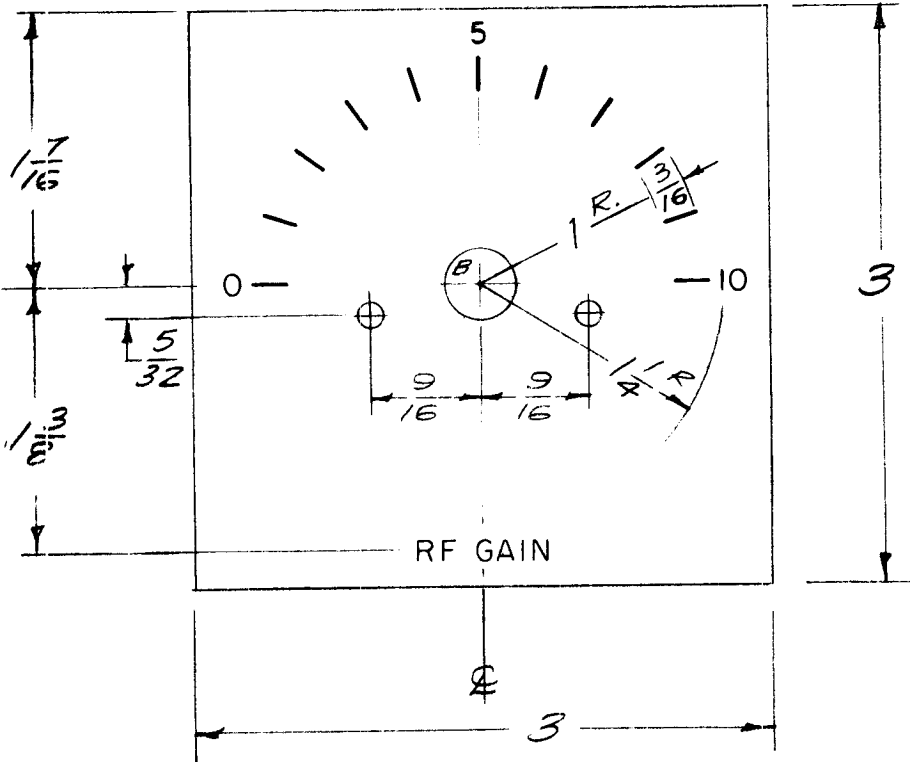

A - $\frac{1}{8}$ (.125) D. 2 Req
 B - $\frac{25}{64}$ (.390) D 1 Req.

DIAL TO HAVE ADHESIVE BACKING

FINISH
 S101 Caustic Dip
 S114 Zinc Chromate Primer 2 Front Only
 S115 Smooth Grey Enamel 1

Calibration Lines, Letters, & Numerals to be Engraved, .005 Deep X .015 Wide Stroke, White Filled. Letters & Numerals to be 1/8 high Gothic

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL	
		3 x 3 x .020 Thk	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK. NEW YORK				
		Aluminum	DIAL, RF GAIN				
		MATERIAL					
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: FULL				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. ±							
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
			PLK		LD-457		
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.				