


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	APR 11/68		AP		
A		REV PER CEMU	7 JAN 72	1181	C.C.		
B		REV PER CEMU	15 JUNE 72	1186	C.C.		
C		ON LEFT & RIGHT SIDES DIM 5/8 WAS 1 15/16 - TWO "B" HOLES & 4 "E" HOLES DEL.	11-19-72				

REQ. NO.	REQ. -1	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	2	1	NT129-1032-4	NUT, SWAGE	"C"
	4	2	9M 123	STANDOFF RIVET TYPE	"G"
6	6	3	NT129-632-4	NUT, SWAGE	"B"
3	3	4	RI10001-423	RIVET	"F"
4	4	5	RE100-09182	PIVET BLIND	"H"
2	2	6	FB102-1	SPRING TYPE'S	"I"

UNLESS OTHERWISE SPECIFIED  
 (1) USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS  
 (2) ALL ANGULAR BENDS 90°  
 (3) REMOVE ALL BURRS & SHARP EDGES

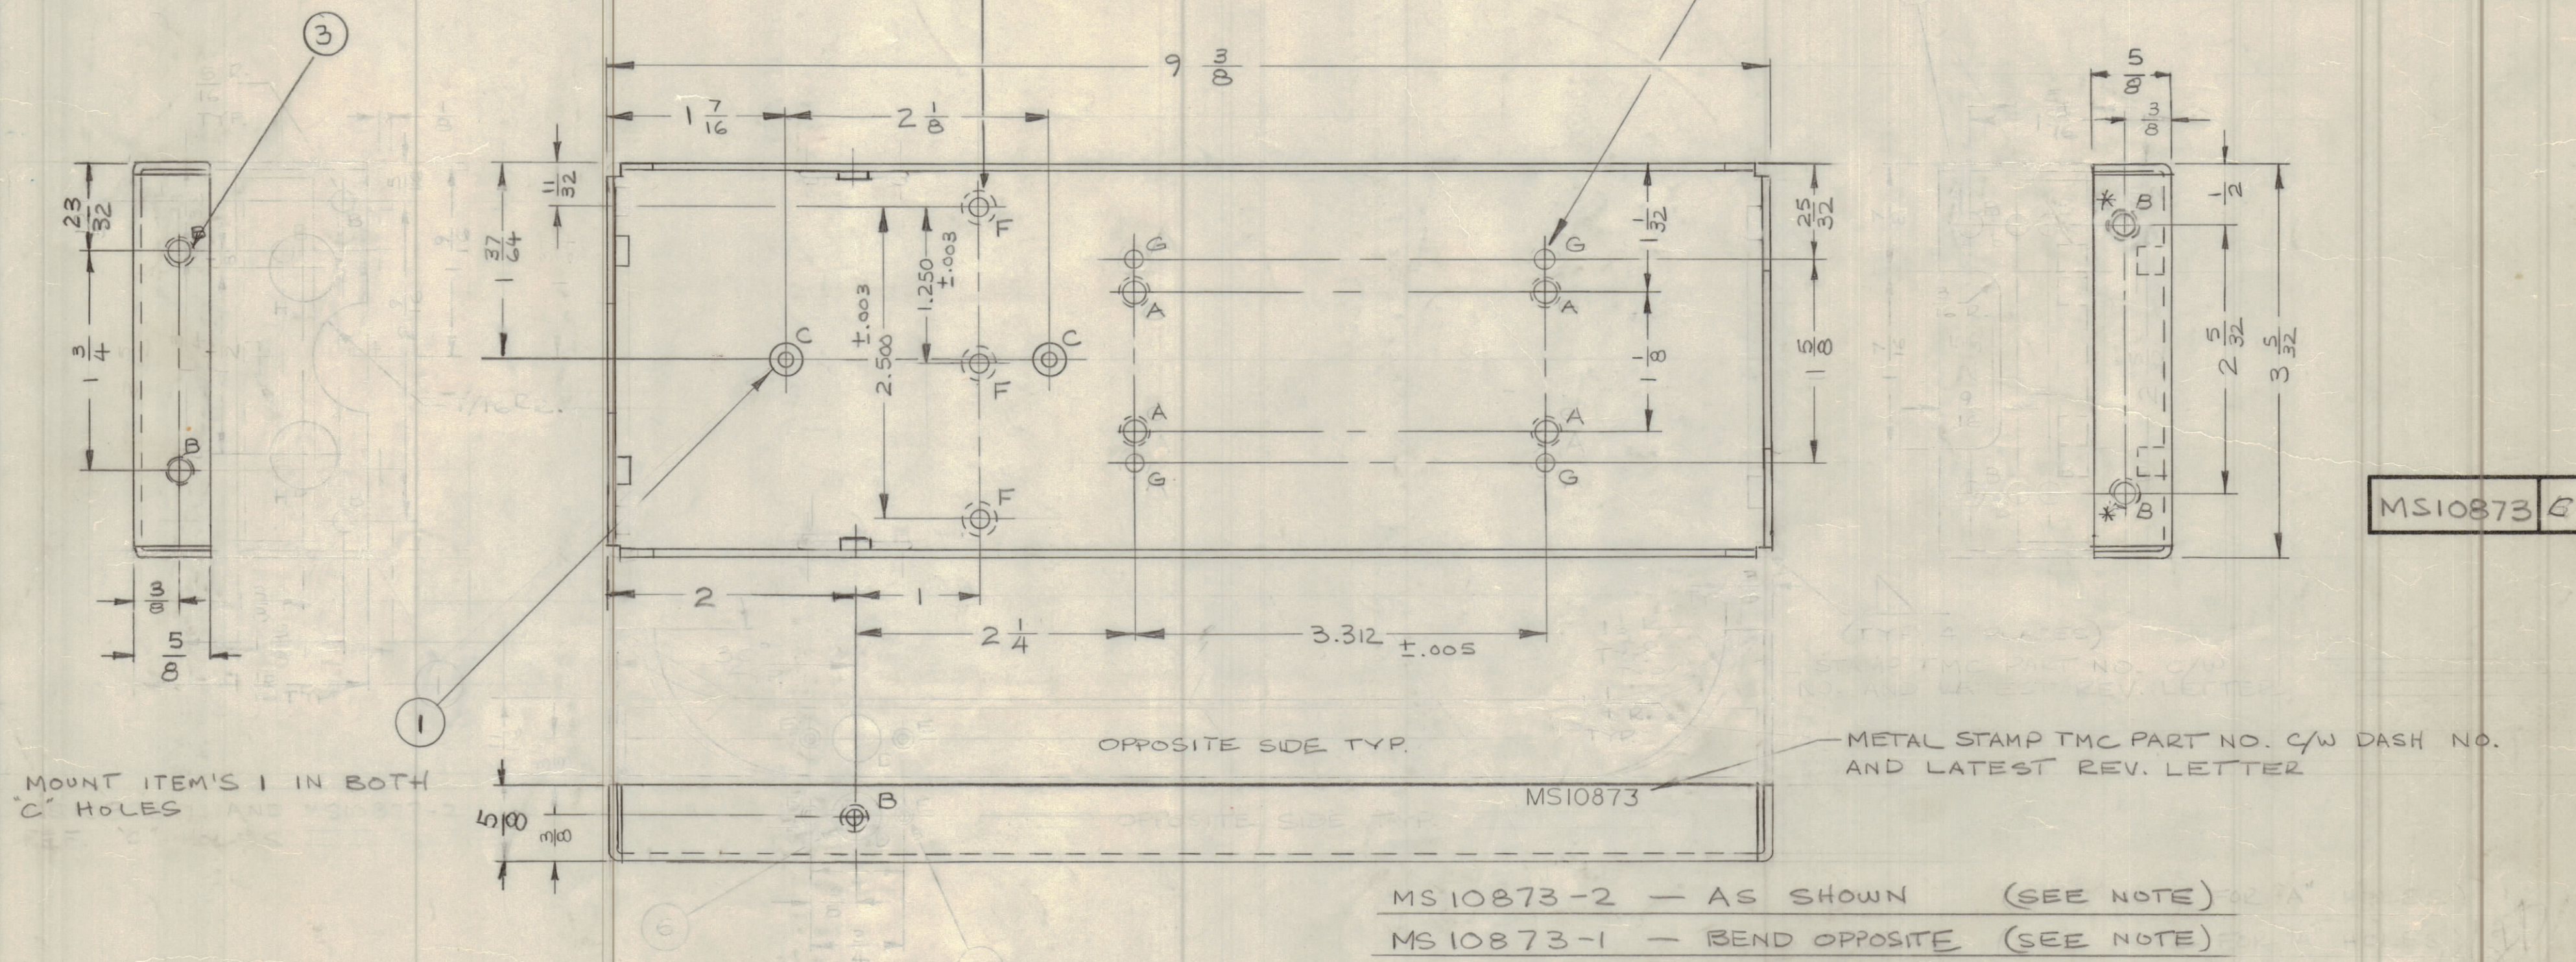

HOLE	DESCRIPTION	REQ'D
A	.125 DRILL CS'K 82° TO .230	4
B	.191 - .194	6
C	.250 - .253 DIA.	2
D	DELETED	2
E	DELETED	4
F	.128 DRILL CS'K 120° TO 240	3
G	.135 ±.003	4
H	.17/82 DIA.	2
J	.17/82	2

NOTES:  
 1. "A" HOLES REQ'D ON MS10873-2 ONLY  
 2. "G" HOLES REQ'D ON MS10873-1 ONLY  
 3. OMIT ITEM 3 ON "B" HOLES MARKED THUS \* FOR "-1 ONLY

TOLERANCES	SCALE
ALL OTHERS DEC. DIM. ± .05 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
AMC 2/B		BMA 10689 BMA 10690	FEB 17/68

.062 THK.		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
ALUM.	WEIGHT PER PC	PLATE, SIDE	
57S-H34		RPL	
TYPE & TEMPER		DRAWN	ELEC. DES. APP. MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
5404 IRIDITE			MS10873 C
FINISH & SPEC. NO.			