




IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES							
ISSUE	ITEM	CHANGED FROM	DATE	EN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	12-23-80				
2		ORIGINAL DWR. NOT RECEIVED (REDRAWN NO REV.)					

REQ	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	1	NT129-44D-4	NUT, SWAGE	A
4	2	TE164-6	NUT, PLAIN CLINCH	C

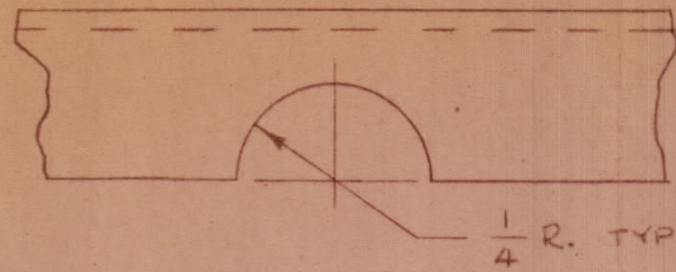

DETAIL "AA"
(2 REQ'D)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

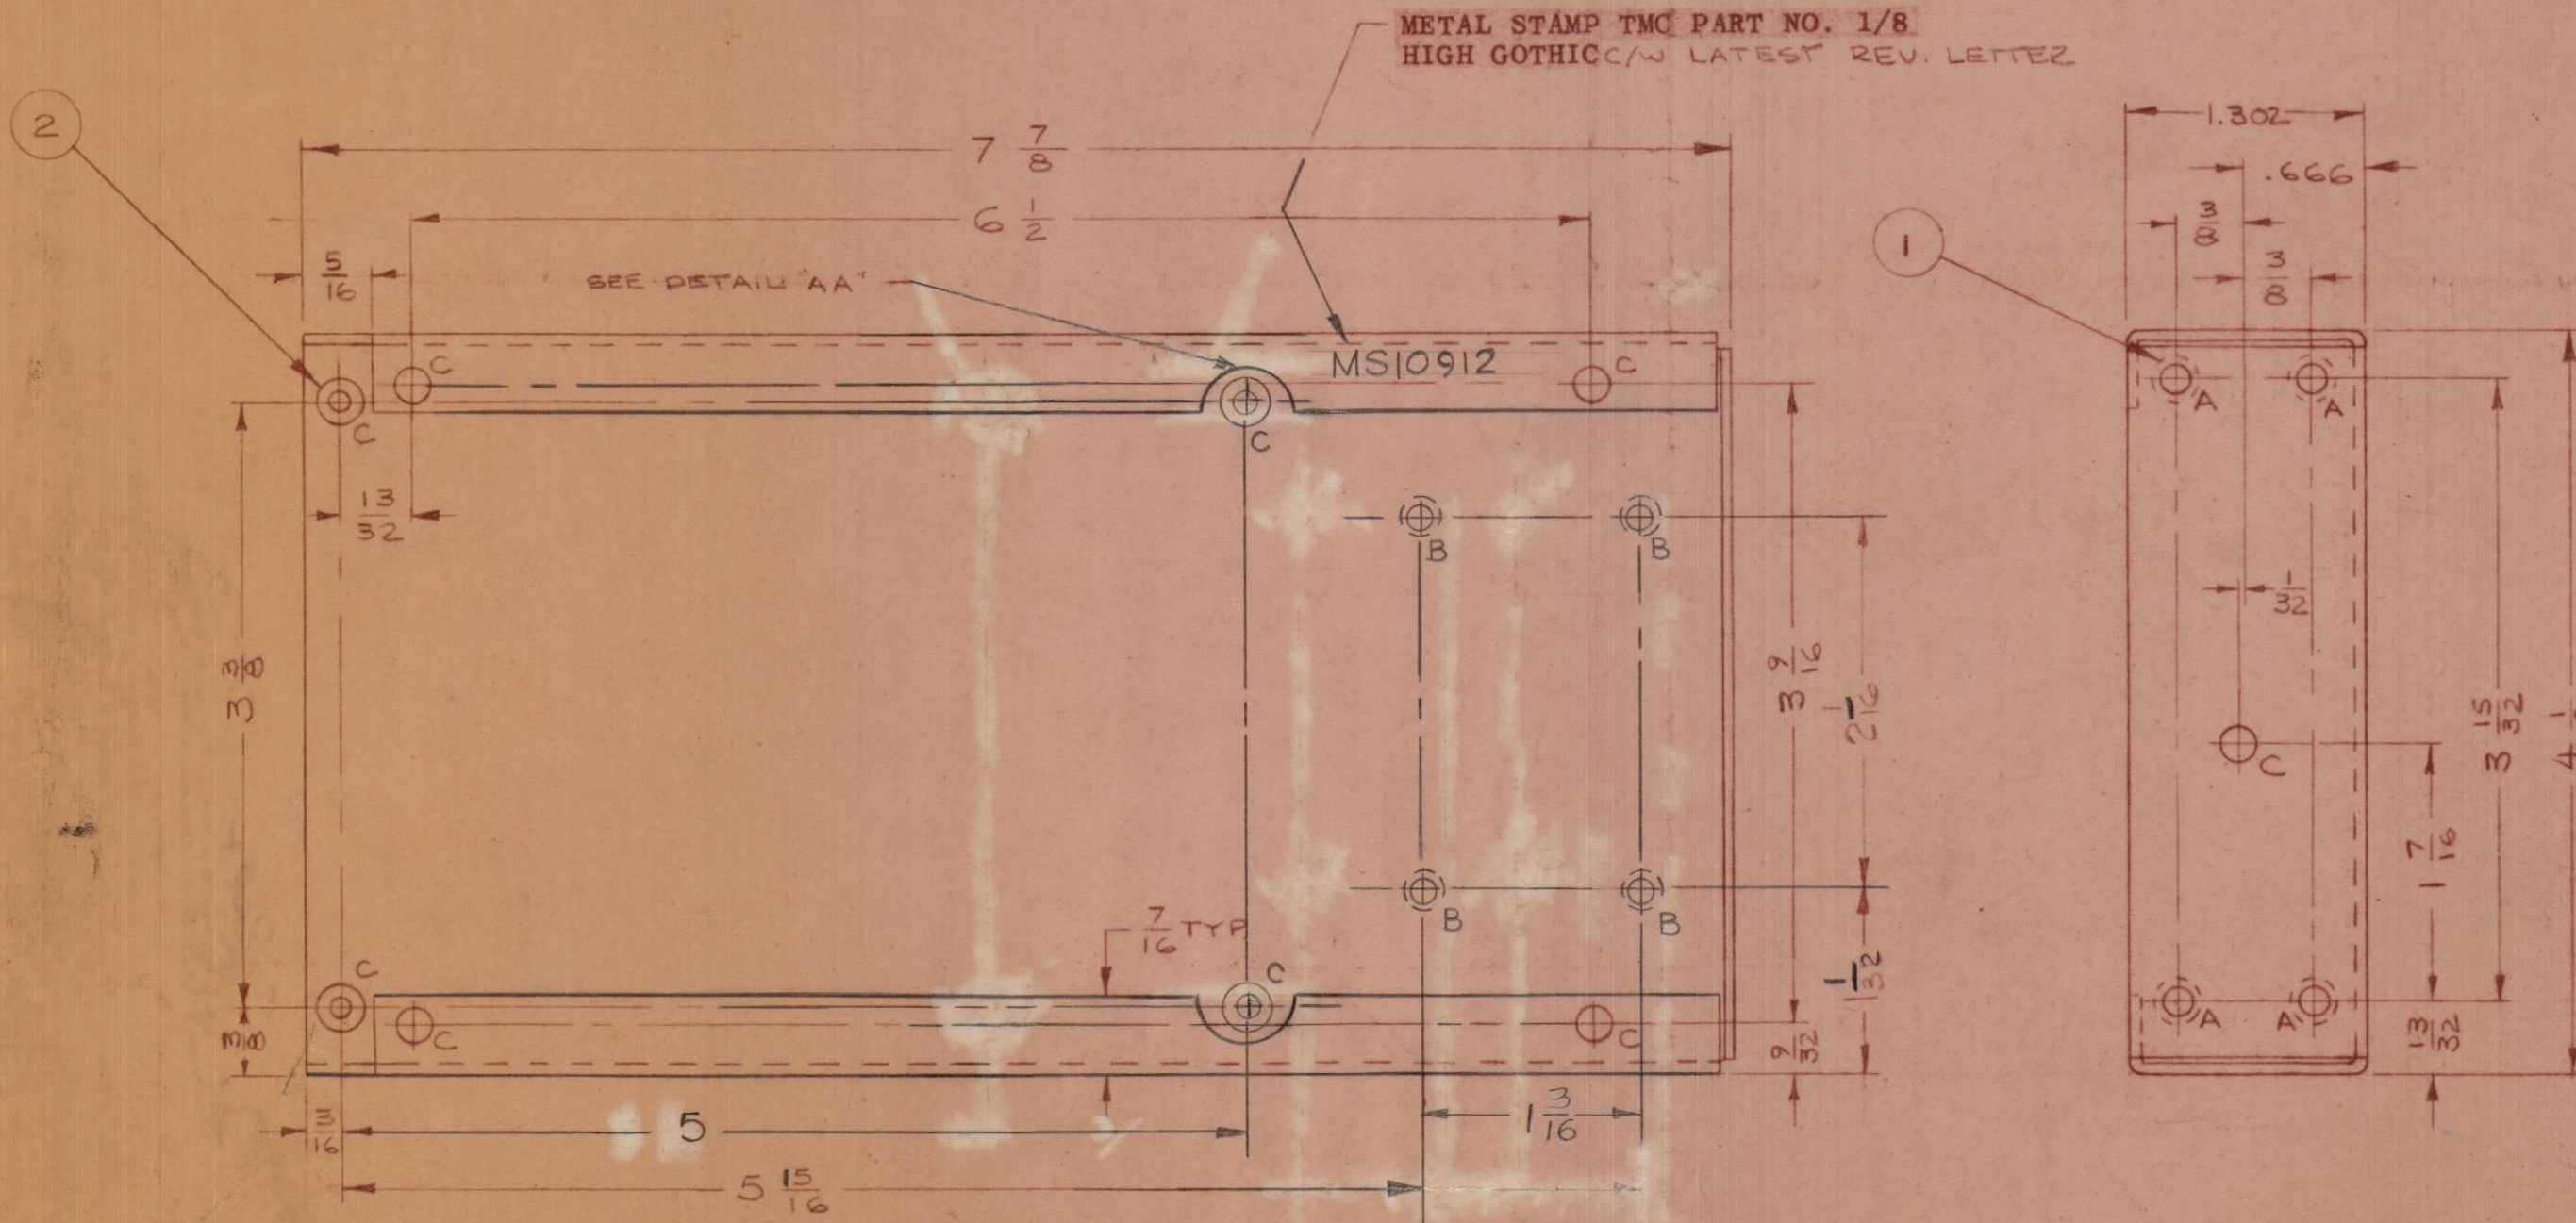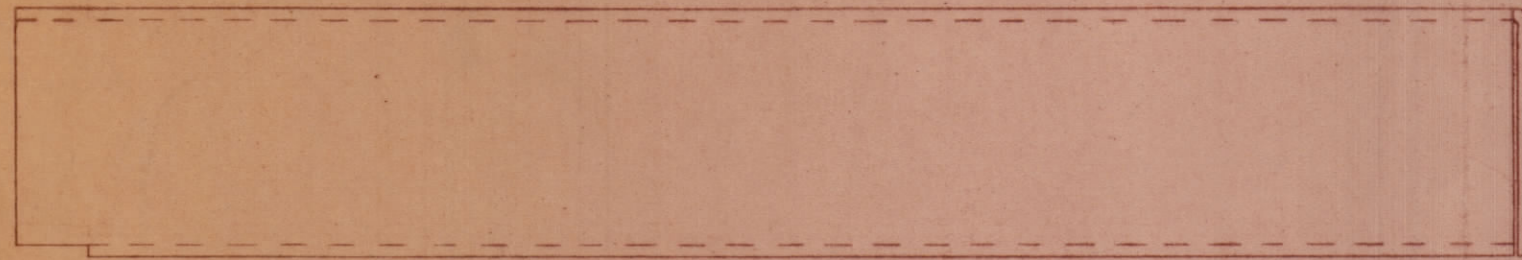

MS10912 Ø

HOLE	DESCRIPTION	REQ'D
A	.161-.164 DIA.	4
B	DRILL 106 & CS'K 82° TO .199	4
C	.187 DIA.	9

TOLERANCES		SCALE: 1:1
DEC. DIM.	XX.08	DRILL, PUNCH, COMMERCIAL STOCK
FRAC. DIM.	XX.01	SIZES AND MANUFACTURERS
ANGULAR DIM.	XX.005	TOLERANCES ARE NOT INCLUDED.

TTRT-()E			
MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON			

.062 THK.		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
ALUM.	WEIGHT PER PC.	CHASSIS, WRAPAROUND	
575-H34		RPL	
TYPE & TEMPER		DRAWN	ELEC. DES. APP.
		CHECKED	MECH. DES. APP.
HEAT TREAT. SPEC.		FINAL APPROVAL	
		MS10912 Ø	
FINISH & SPEC. NO.		= 404 IRIDITE	