


| IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY. | | | | DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED | | | |
|---|------|-----------------|-----------|---|--------|---------|-----------|
| MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES. | | | | | | | |
| ISSUE | ITEM | CHANGED FROM | DATE | CN. NO. | DRAFTS | CHECKER | ENG. APP. |
| φ | | REL TO PROD. | 8 AUG 69 | | JW | | |
| A | | REV AS PER CEMN | SEP 24/69 | 558 | FW | | |
| B | | REV AS PER CEMN | SEP 24/69 | 598 | FW | | |
| C | | REV AS PER CEMN | DEC 69 | 648 | FW | | |
| D | | REV. PER CEMN | JULY 7/71 | 1032 | NAT. | | |
| E | | REV. PER CEMN | FEB 10-72 | 1132 | J.V.R. | H.C.S. | |

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|------|------|----------|-------------|--------|
|------|------|----------|-------------|--------|

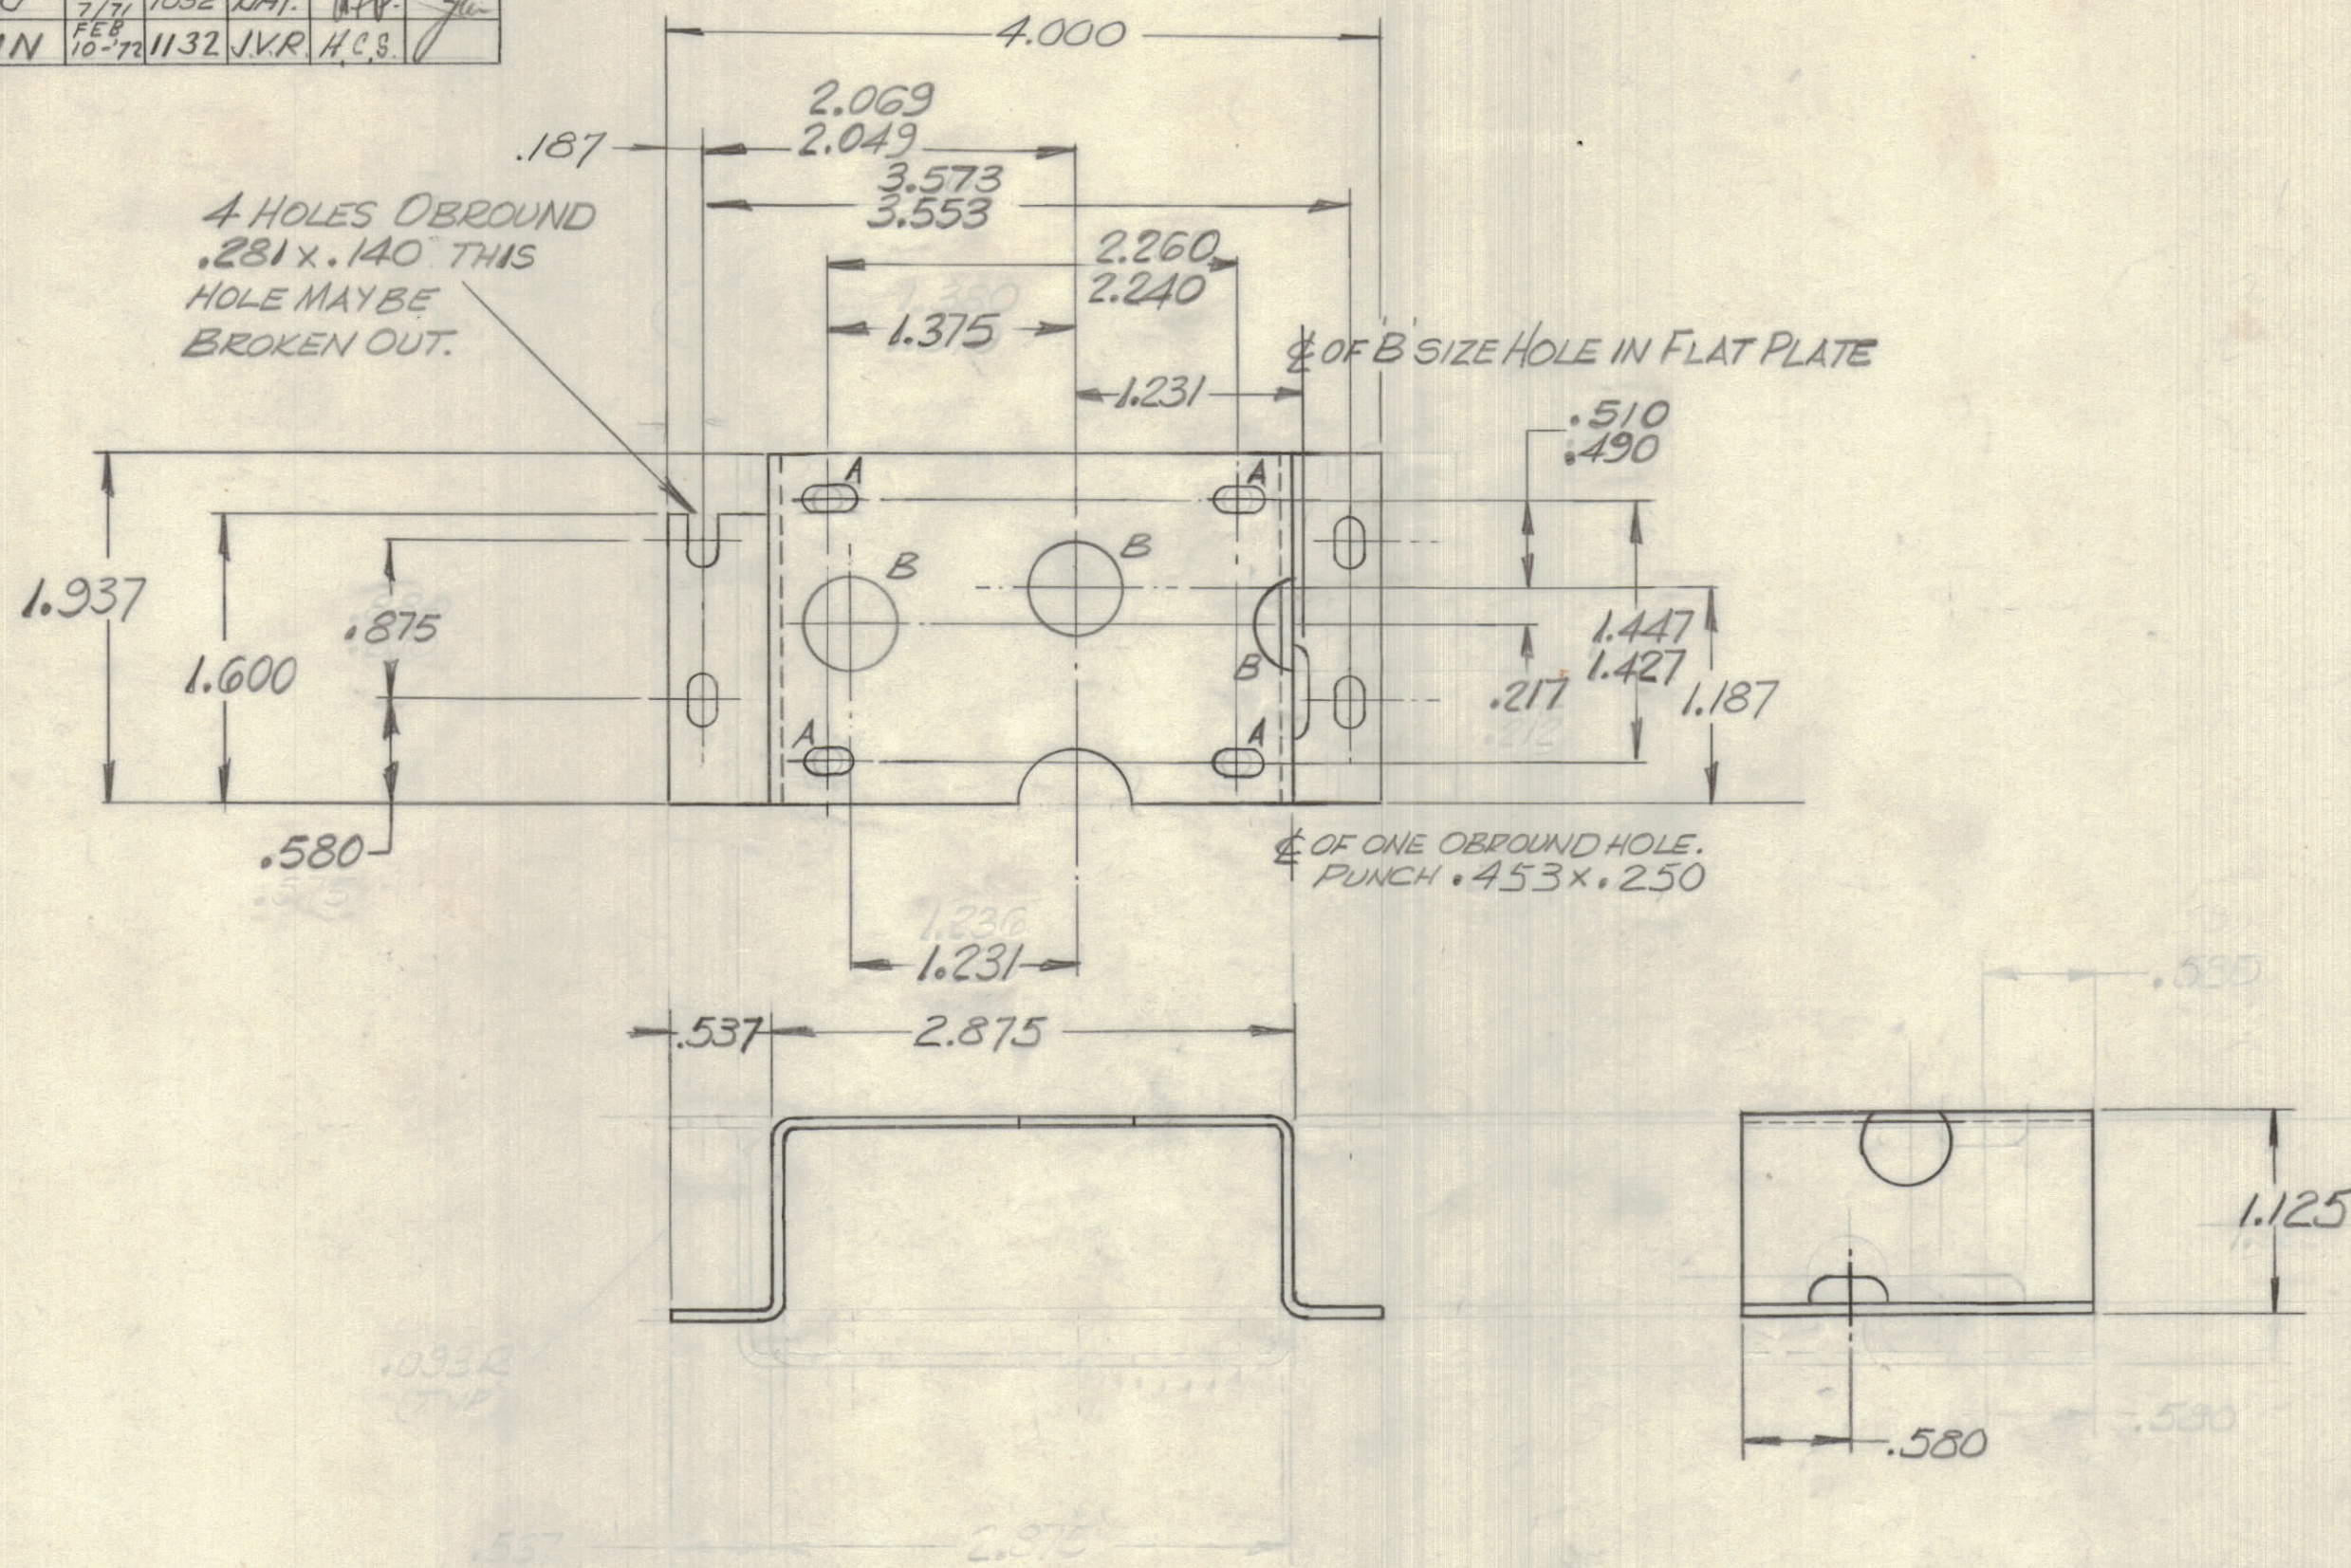

MS11054 E

| HOLE | DESCRIPTION | QTY |
|------|--------------------|-----|
| A | OBOUND .125 x .250 | 4 |
| B | .500 DIA | 3 |

| | | |
|------------|--|---|
| TOLERANCES | | SCALE: 1:1 |
| ALL OTHERS | DEC. DIM. ± .015 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30' | DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED. |

| | | |
|------------|-------------|----------|
| LPA-1K/CAN | 088/69 | 8 AUG 69 |
| MODEL | PROJECT NO. | DATE |

| | | | |
|--------------------|--|-------------------------|--|
| .064 | | TMC (Canada) LIMITED | |
| STOCK SIZE | | OTTAWA ONTARIO | |
| AL ALY | | BRACKET, GEAR BOX, MTG. | |
| MATERIAL | | WEIGHT PER PC. | |
| 575-H32 | | | |
| TYPE & TEMPER | | | |
| DRAWN | | ELEC. DES. APP. | |
| HEAT TREAT. SPEC. | | MECH. DES. APP. | |
| CHECKED | | FINAL APPROVAL | |
| IRIDITE S404 | | MS11054 E | |
| FINISH & SPEC. NO. | | | |