


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENG RELEASE	28 SEP 71		NAT	LB	YH
X1		ITEM 1 ADDED 'D' HOLES WERE .156 QTY 'A' HOLES WAS 3 'A' HOLE @ 45° DELETED	16 DEC 71		NAT	LB	YH
X2		DELETED LOWER FLANGE	22 MAR 72		NAT	HCS	
X3		DIMENSIONING CLARIFIED	5 APR 72		NAT	HCS	
X4		LD10447-4 ADDED	17 APR 72		NAT	LB	
X5		'B' HOLE RELOCATED	16 MAY 72		NAT	HCS	
X6		NOTE 3 DELETED	1 JULY 72		NAT	HCS	HCS

REQ	ITEM	PART NO.	DESCRIPTION	USED ON	REMARKS
3	1	NJ10002-1	NUT, CLINCH	MS11362	'D' HOLE

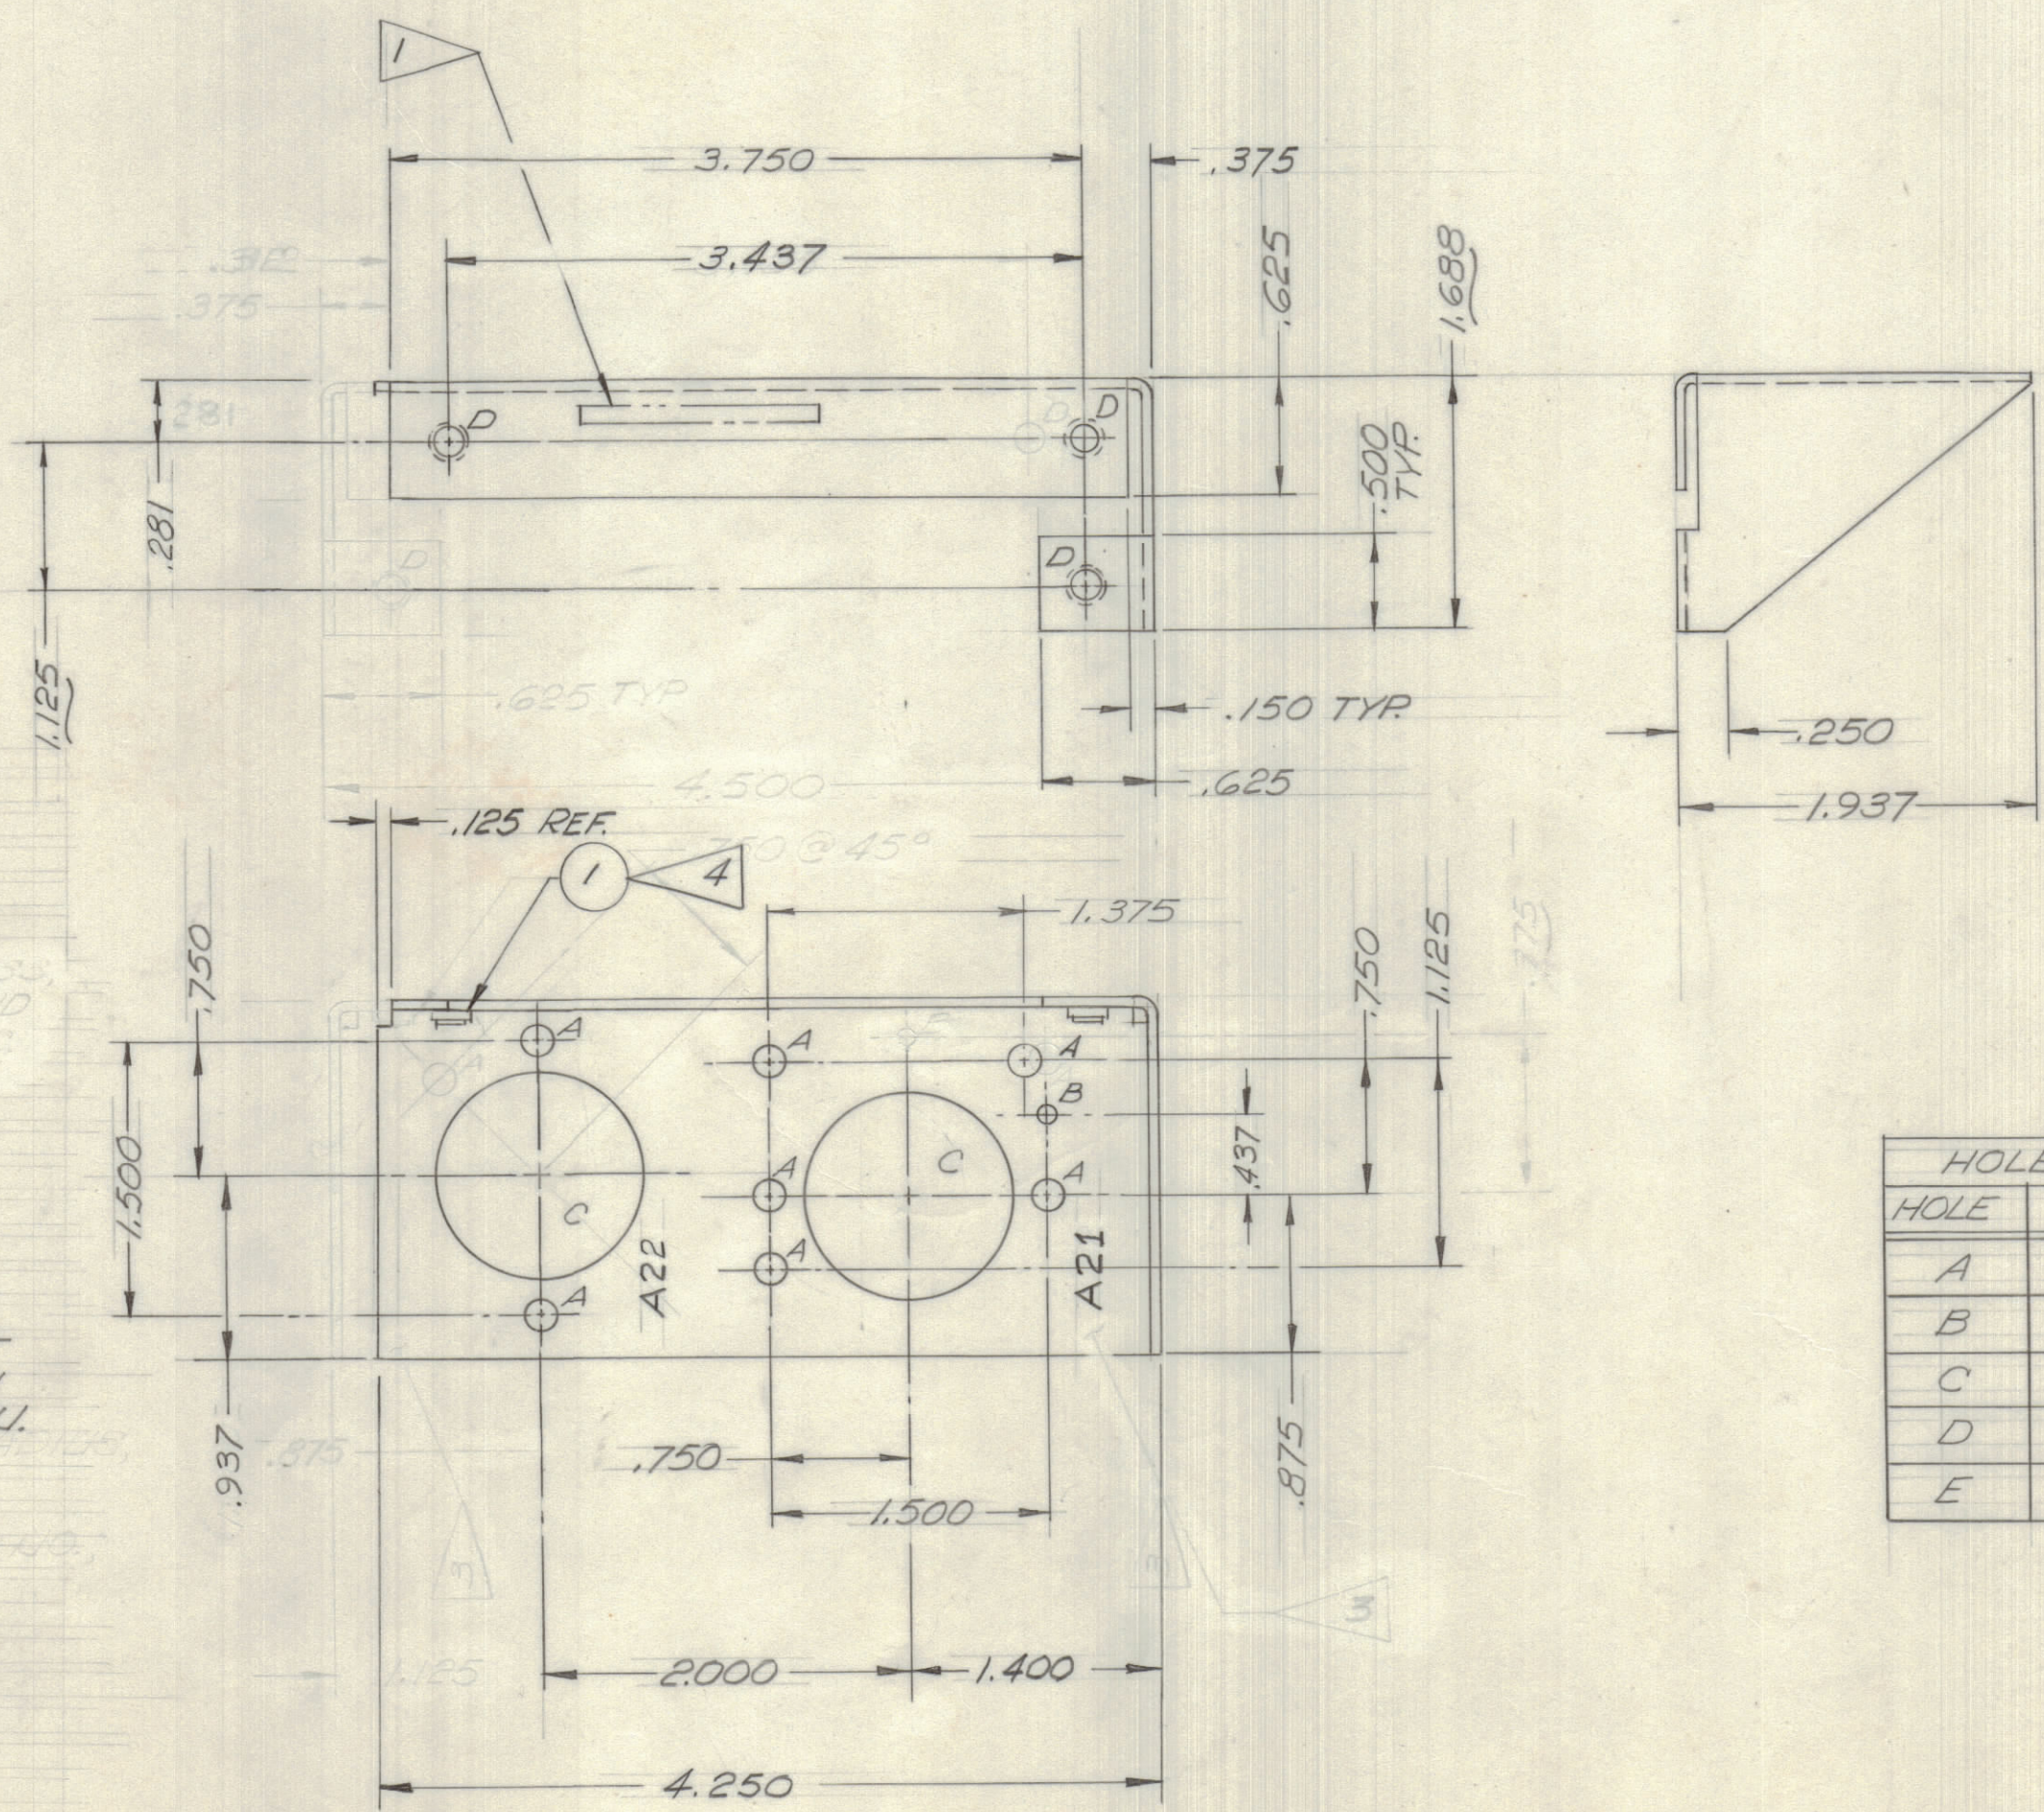

MS11362 X6

1. METAL STAMP TMC PART NO. 48 HIGH, GOTHIC, IN APPROX POSITION SHOWN.
2. MINIMUM INSIDE BEVD RADIUS, .064
3. FOR QUANTITIES 25 OR LESS, DIMENSIONS TO BE HAND LETTERED AS PER T.M.C. SPEC. 5-307 IN APPROX POSITIONS SHOWN.
4. INSTALL AFTER FINISHING

NOTES

HOLE	DESCRIPTION	QTY
A	.171 DIA	7
B	.106 DIA	1
C	1.187 DIA	2
D	.172/.175 DIA	3
E		

REF: LD 10447-4

.064 THK		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
AL ALY		BRACKET, OVENIZED OSC.	
MATERIAL	WEIGHT PER PC.	AND FREQ. STANDARD	
575 H32		THOMAS	H SCHAFER
TYPE & TEMPER		DRAWN	ELEC. DES. APP.
		L. BROWN	MECH. DES. APP.
		CHECKED	FINAL APPROVAL
			MS11362 X6

MMX (M) 3	12/27/71	A11002	
MMX (A) 3	12/27/71	A11002	8 SEPT 71
MODEL	PROJECT NO.	ASSY. NO.	DATE

TOLERANCES		SCALE: 1/1
ALL OTHERS	DEC. DIM ± .015 FRAC. DIM ± .004 ANGULAR DIM ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.