


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENG RELEASE	22 DEC 72			C.C.	H.C.S.
X1		(4) .120" HOLES & ASSOC. DIMS DELETED. ITEM 2 (NT 129-4-40-4)	30 SEP 73			JMM	HCS

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
8	1	TE-164-6	NUT, PLAIN, CLINCH	B HOLE

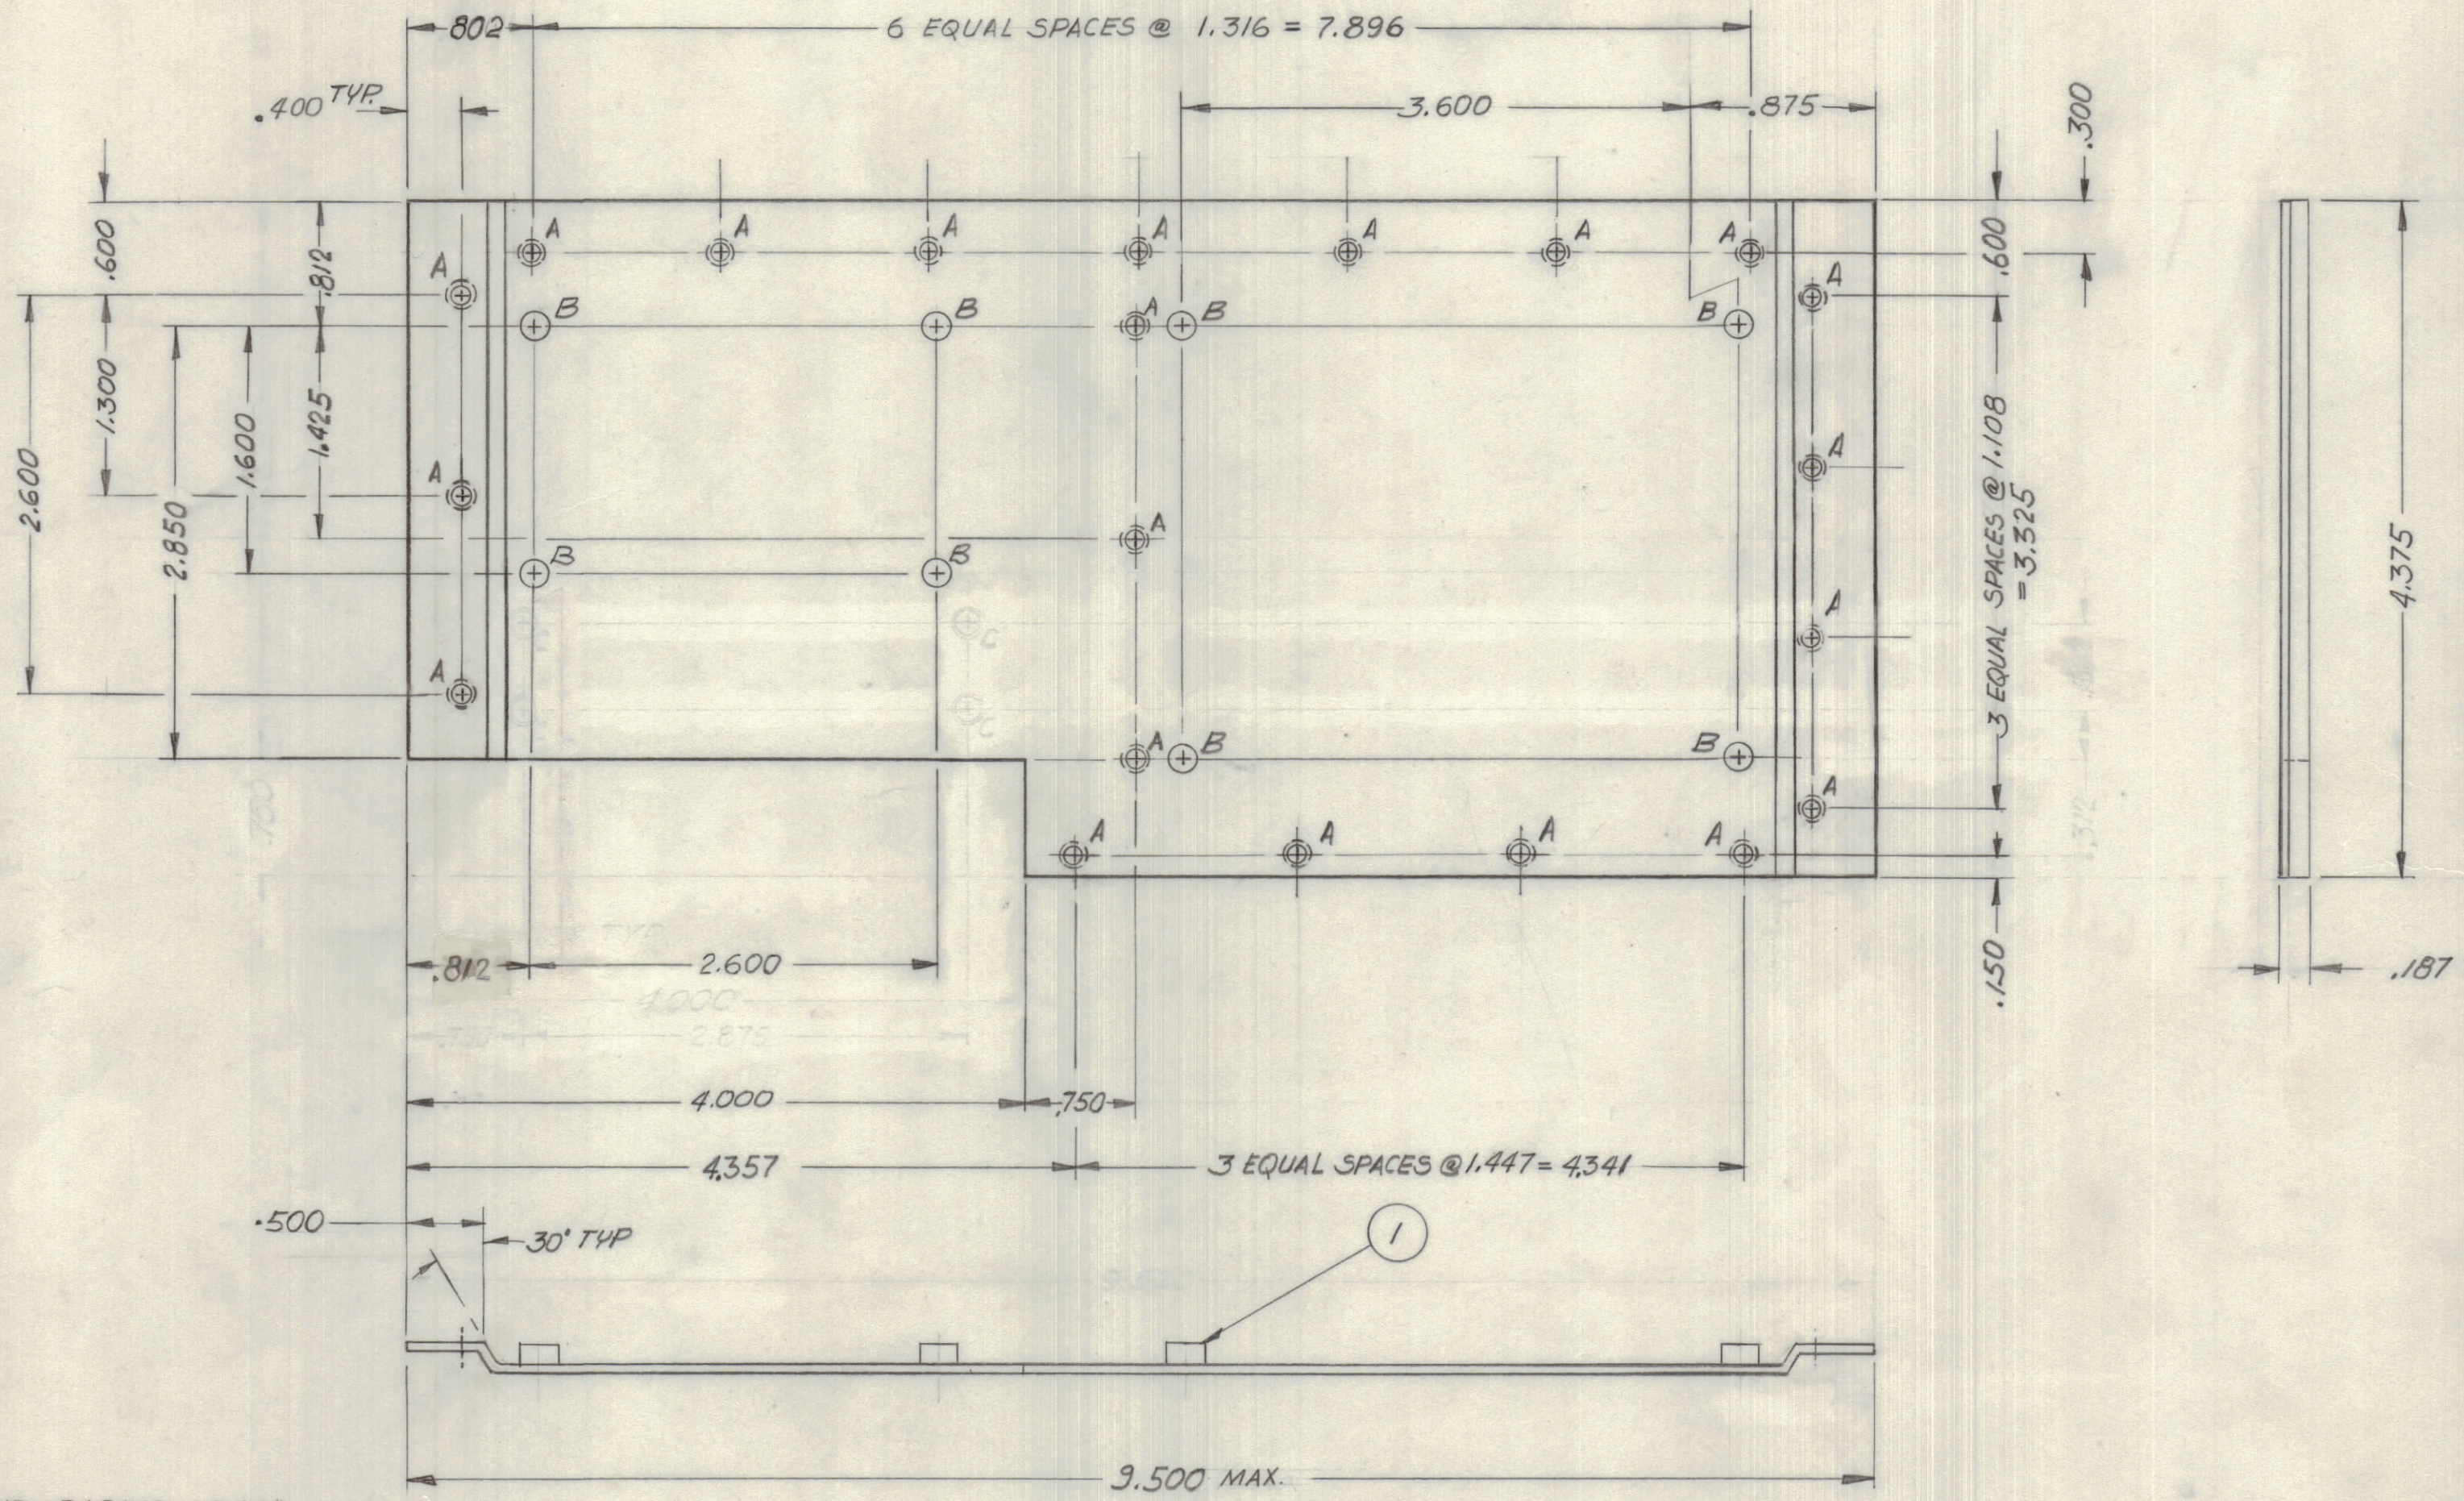

HOLE	DESCRIPTION	QTY
A	.120 DIA CSK 82° x .218 DIA.	21
B	.189 DIA.	8

1. MINIMUM INSIDE BEND RADIUS: .064"

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± .05 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MMX 3	110/71	A11095	15 DEC 1972
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

.064 THK.	TMC (Canada) LIMITED OTTAWA ONTARIO	
STOCK SIZE	PC. BOARD BASE	
AL ALY	MATERIAL	
575 H32	WEIGHT PER PC.	
TYPE & TEMPER	C. CHARLES	H. SCHAFER
HEAT TREAT. SPEC.	DRAWN	ELEC. DES. APP.
IRIDITE S404	CHECKED	MECH. DES. APP.
FINISH & SPEC. NO.	FINAL APPROVAL	
	MS11487 X1	