
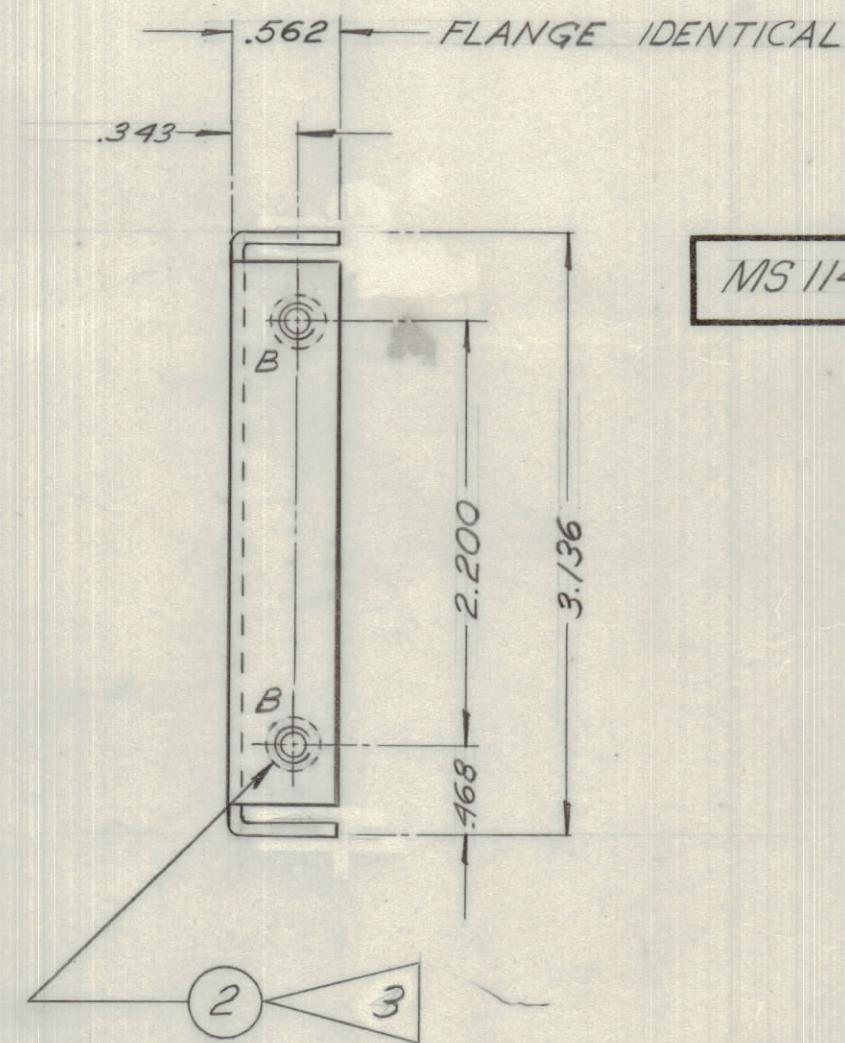
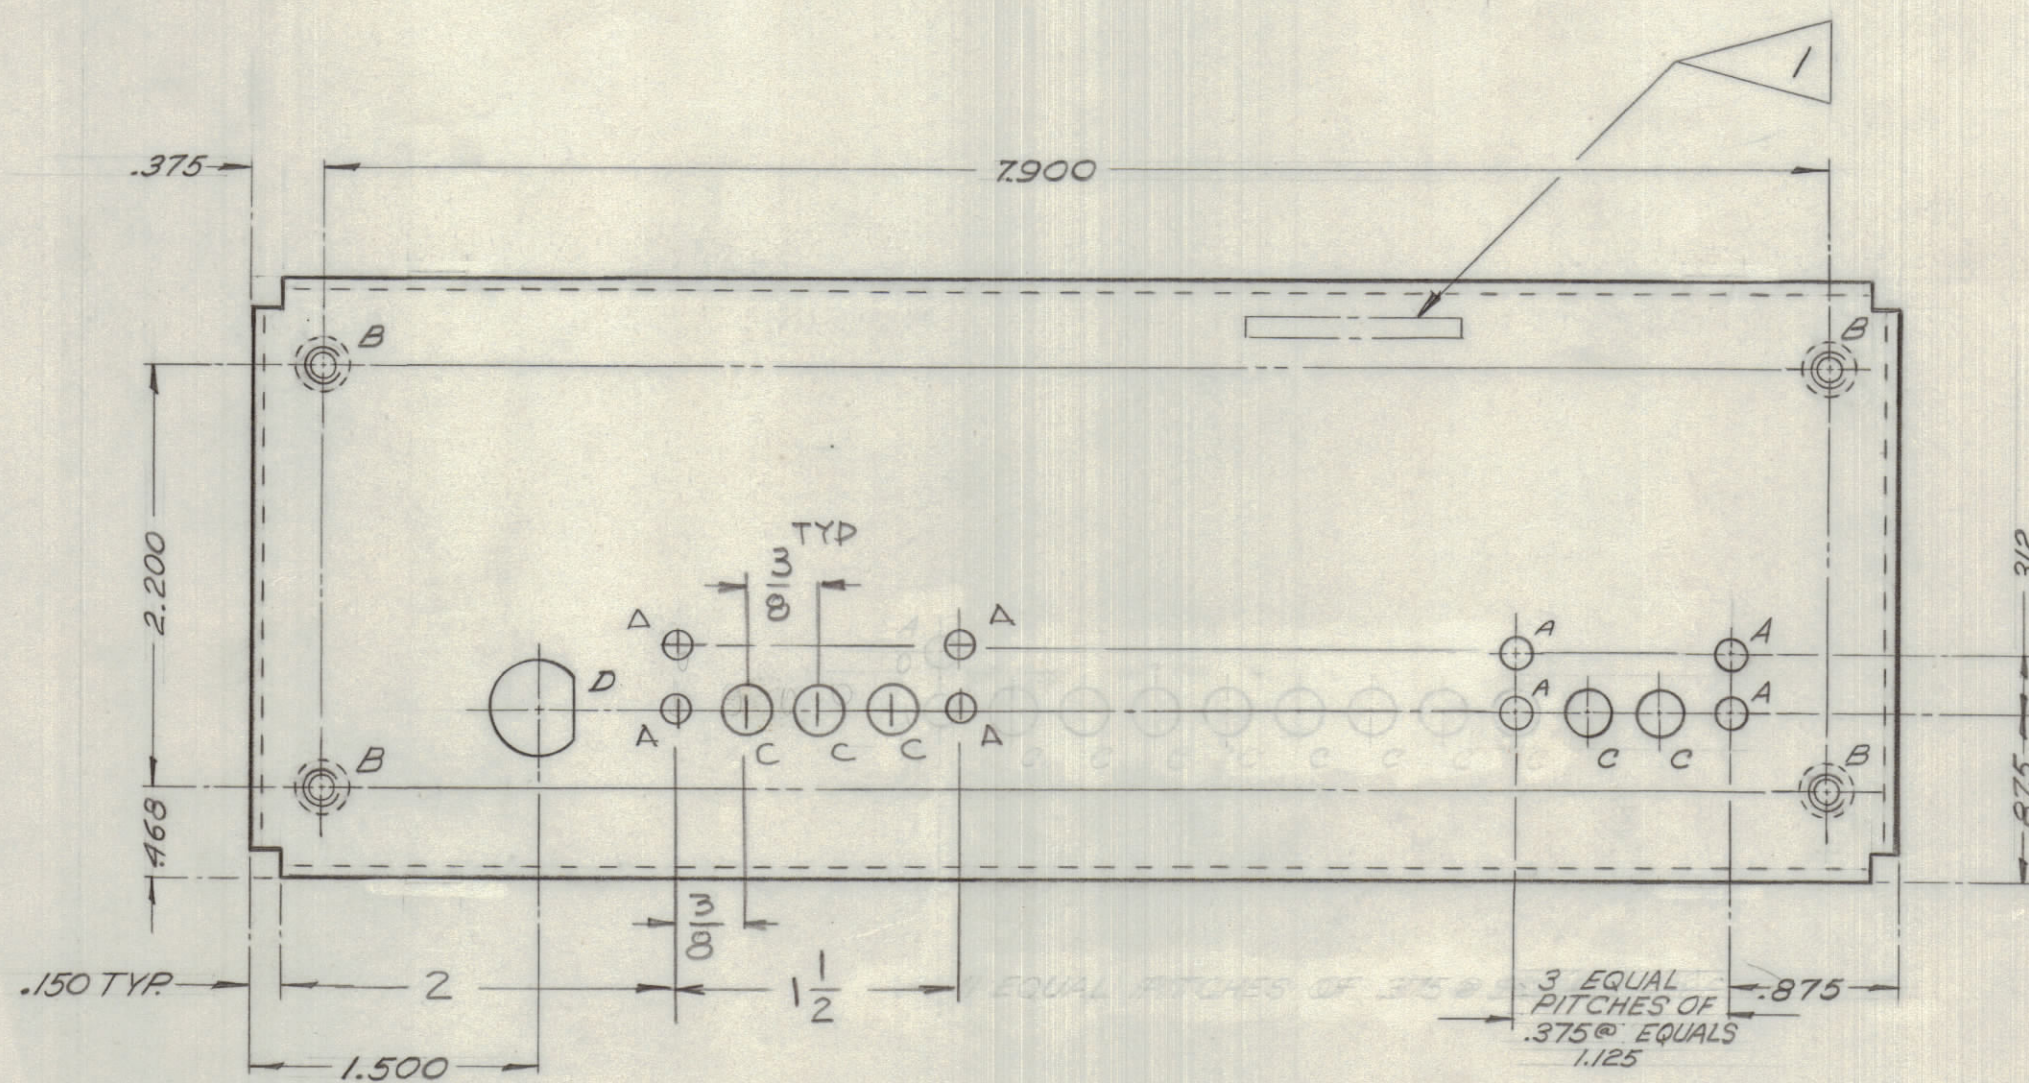


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	30 APR 73		C.C.	H.C.S.	SDW
A		THREE 'C' HOLE & FOUR 'A' HOLED ADD	5-20-82	21597	GDL		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
8	2	NT-129-632-4	NUT, ROUND, SWAGE	Ø HOLES

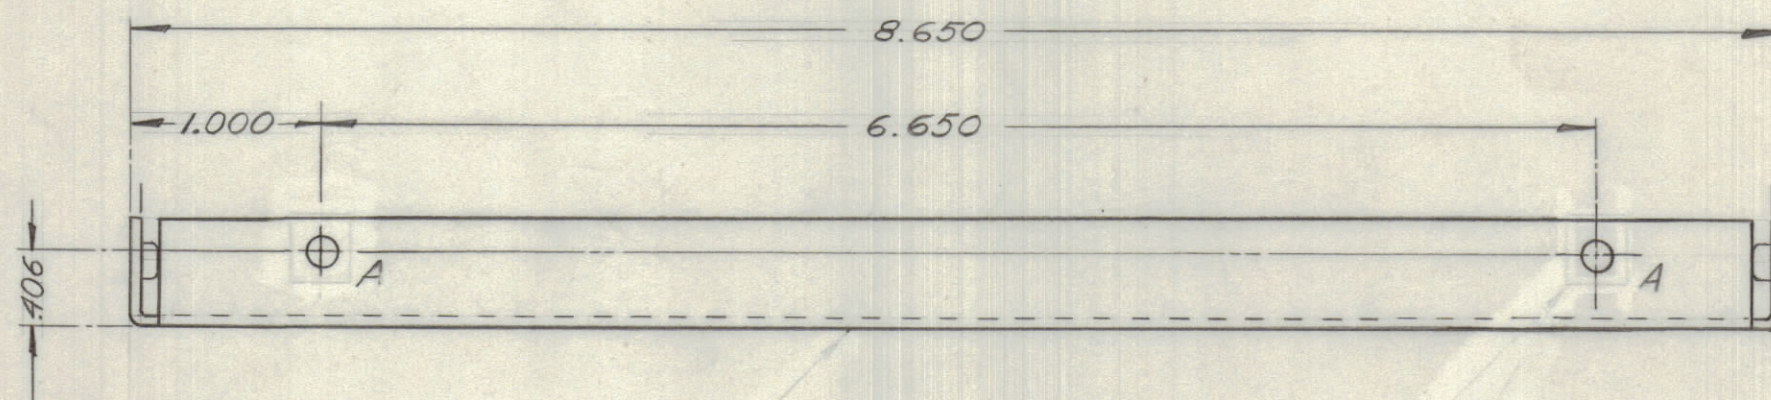

HOLE	DESCRIPTION	QTY
A	.171 DIA	8
B	.191/.194 DIA.	8
C	.250 DIA.	2
D	.625 'D' HOLE	1

3. INSTALL AFTER FINISHING
2. MINIMUM INSIDE BEND RADIUS .064
2. FINISH ALL OVER & PAINT FACE C & SIDES  
 1/4" IRIDITE 14-2 AL COAT  
 1/4" ZINC CHROMATE PRIMER
1. METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC IN APPROX POSITION SHOWN, OPPOSITE SIDE

NOTES:

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± .05 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

RCSR -1T	141/71	A11091	11 JANUARY 73
MODEL	PROJECT NO.	ASSY. NO.	DATE

.064 THK STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
AL ALY		PANEL, REAR	
575 H32		C. CHARLES	HCSCHAFFER
TYPE & TEMPER		DRAWN	ELEC. DES. APP. MECH. DES. APP.
HEAT TREAT. SPEC.		S. WITTEN	
IRIDITE 5404		FINAL APPROVAL	
FINISH & SPEC. NO.		MS11498 A	

REF: LD10465