


B- 3/8 (.375) D. 4 HOLES REQ'D.
 C- 5/64 X 9/32 8 SLOTS REQ'D.
 D- EXTRUDE INWARD AND TAP FOR 4-40 5 HOLES REQ'D.

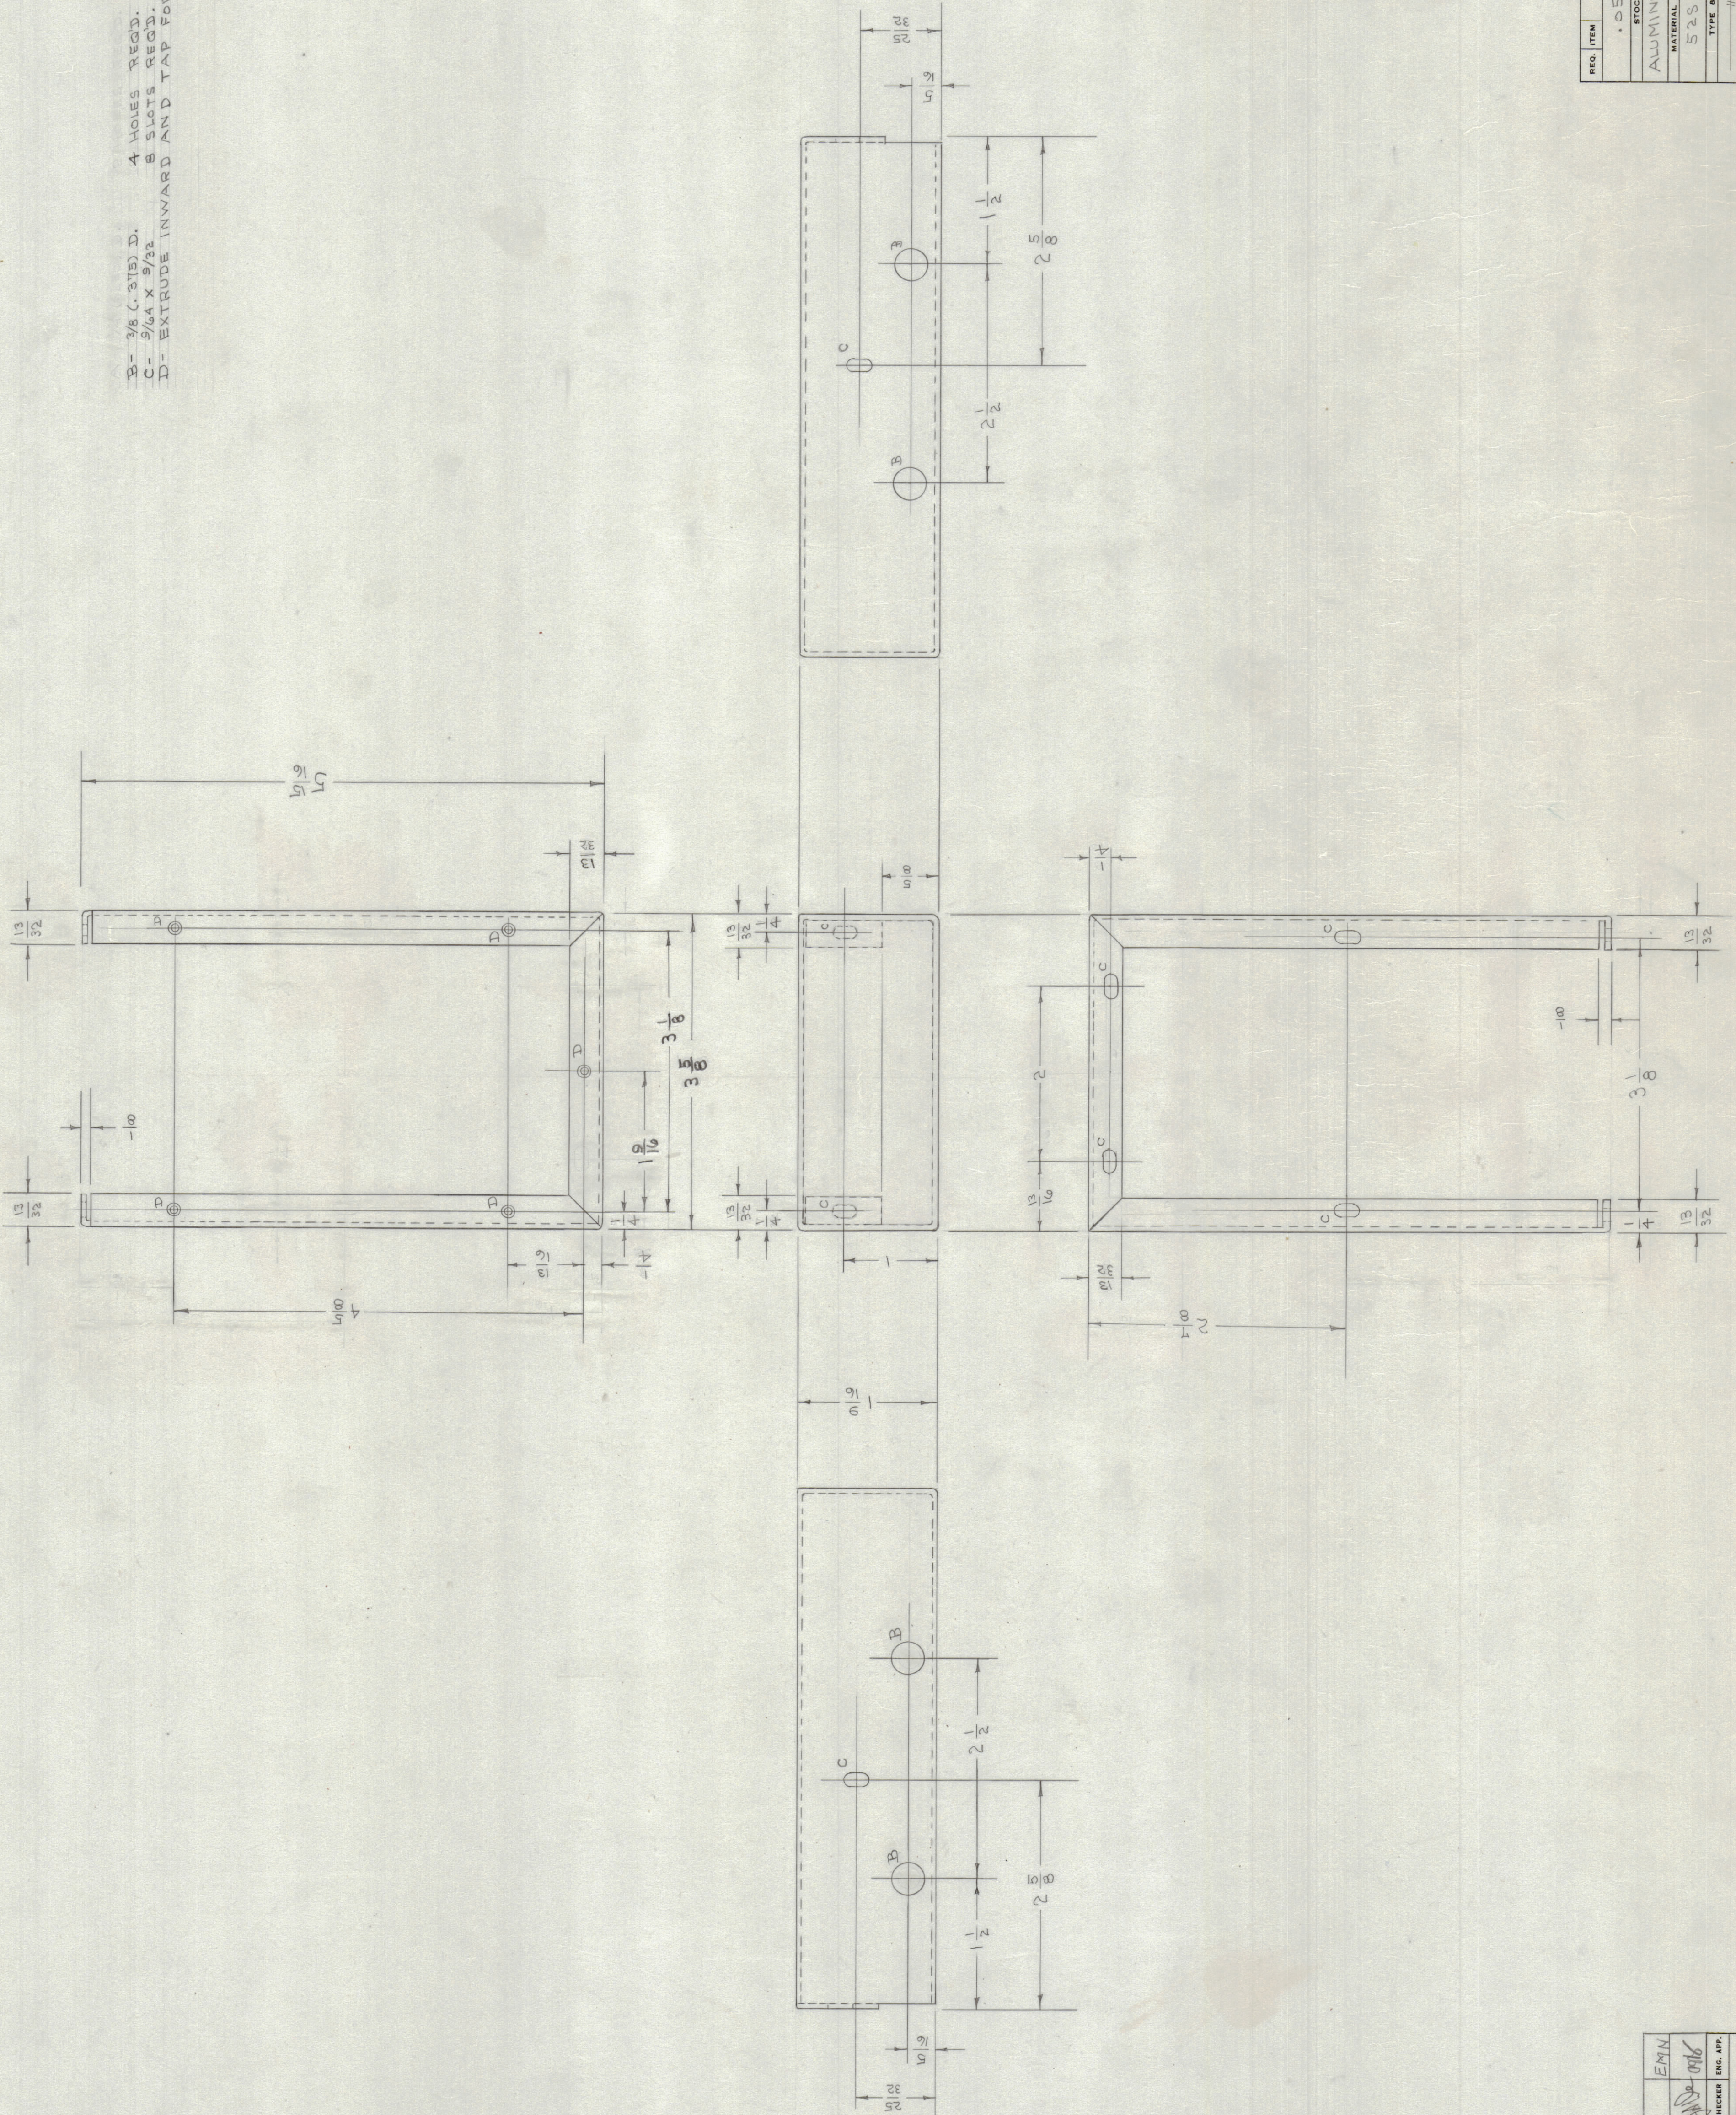

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture any article or device without permission from THE TECHNICAL MATERIEL CORPORATION. This drawing is deemed for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	1051	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE	ALUMINUM	
	MATERIAL	HEIGHT SPEC	
	TYPE & TEMPER	525 H32	
	HEAT TREAT. SPEC.		
	FINISH & SPEC. NO.	S-404 IRIDITE	

DCU MODEL	PROJECT NO.	ASSY. NO.	DATE
DCU	200		9-10-51

DRWN	ELC. DES. APP.	MECH. DES. APP.	FINAL APPROVAL
CD 5/5/53			

ISSUE ITEM	CHANGED FROM	DATE	ENGR	CHKD	ENG. APP.
B	S-404 IRIDITE WAS	7/1/51	EMN		
A	2 1/8 HOLES DELETED	4/1/51			

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED BY THE MANUFACTURER.
 REMOVE ALL BURRS AND SHARP EDGES