


(6) 7/32 DIA HOLES
60° APART ON
1 29/32 RADII (TYP)

HOLES	REQ'D
A ~ 13/64 DIA	5
B ~ 7/32 DIA (60° APART)	12
C ~ SEE DETAIL	4

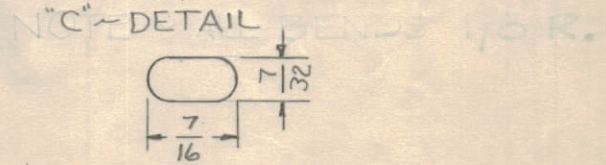

ALUMINUM WELD FRONT EDGES

NOTE ~ ALL BENDS 1/8 R.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° 30'

TOLERANCES

ISSUE	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	1	4(C) SLOTS WERE 4(A) HOLES FINISH WAS GOLD PLATE .000025	5-1-62	6659	EE	AW	DD
A	1	REF: ADDED	2-23-62	6419	G.S.	AW	DD

TOLERANCES

SCALE:

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

MAXIMUM ALLOWABLE TOLERANCES HAVE
BEEN DETERMINED AND ANY DEVIATIONS
WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ PER UNIT	MODEL	SECTION	ASSY. NO.	DATE
1	GPT-10KP			8-5-60

REF: LD-555 (2)

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
1/8 THK		THE TECHNICAL MATERIEL CORP.	
STOCK SIZE		MAMARONECK, NEW YORK	
ALUMINUM		CAPACITOR, MOUNT, TOP	
MATERIAL			
5052-H32			
TYPE & TEMPER			
HEAT TREAT. SPEC.			
SILVER PLATE .0003			
FINISH & SPEC. NO.			

DRAWN: [Signature]
ELEC. DES. APP. [Signature]
MECH. DES. APP. [Signature]
CHECKED: [Signature]
FINAL APPROVAL: [Signature]
MS-2362 B