

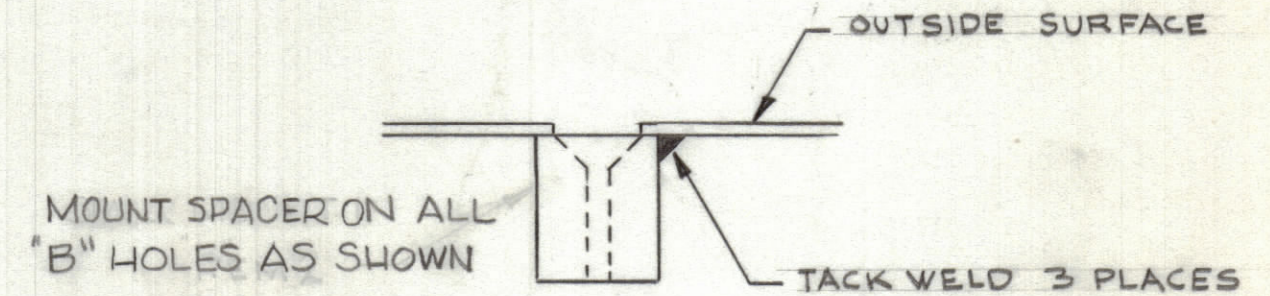
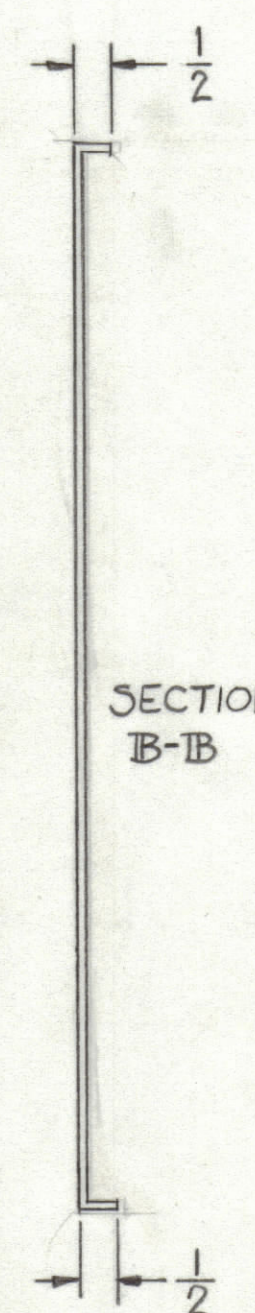



HOLES	REQ'D.
A - 13/16 DIA.	4
B - 3/8 DIA	8

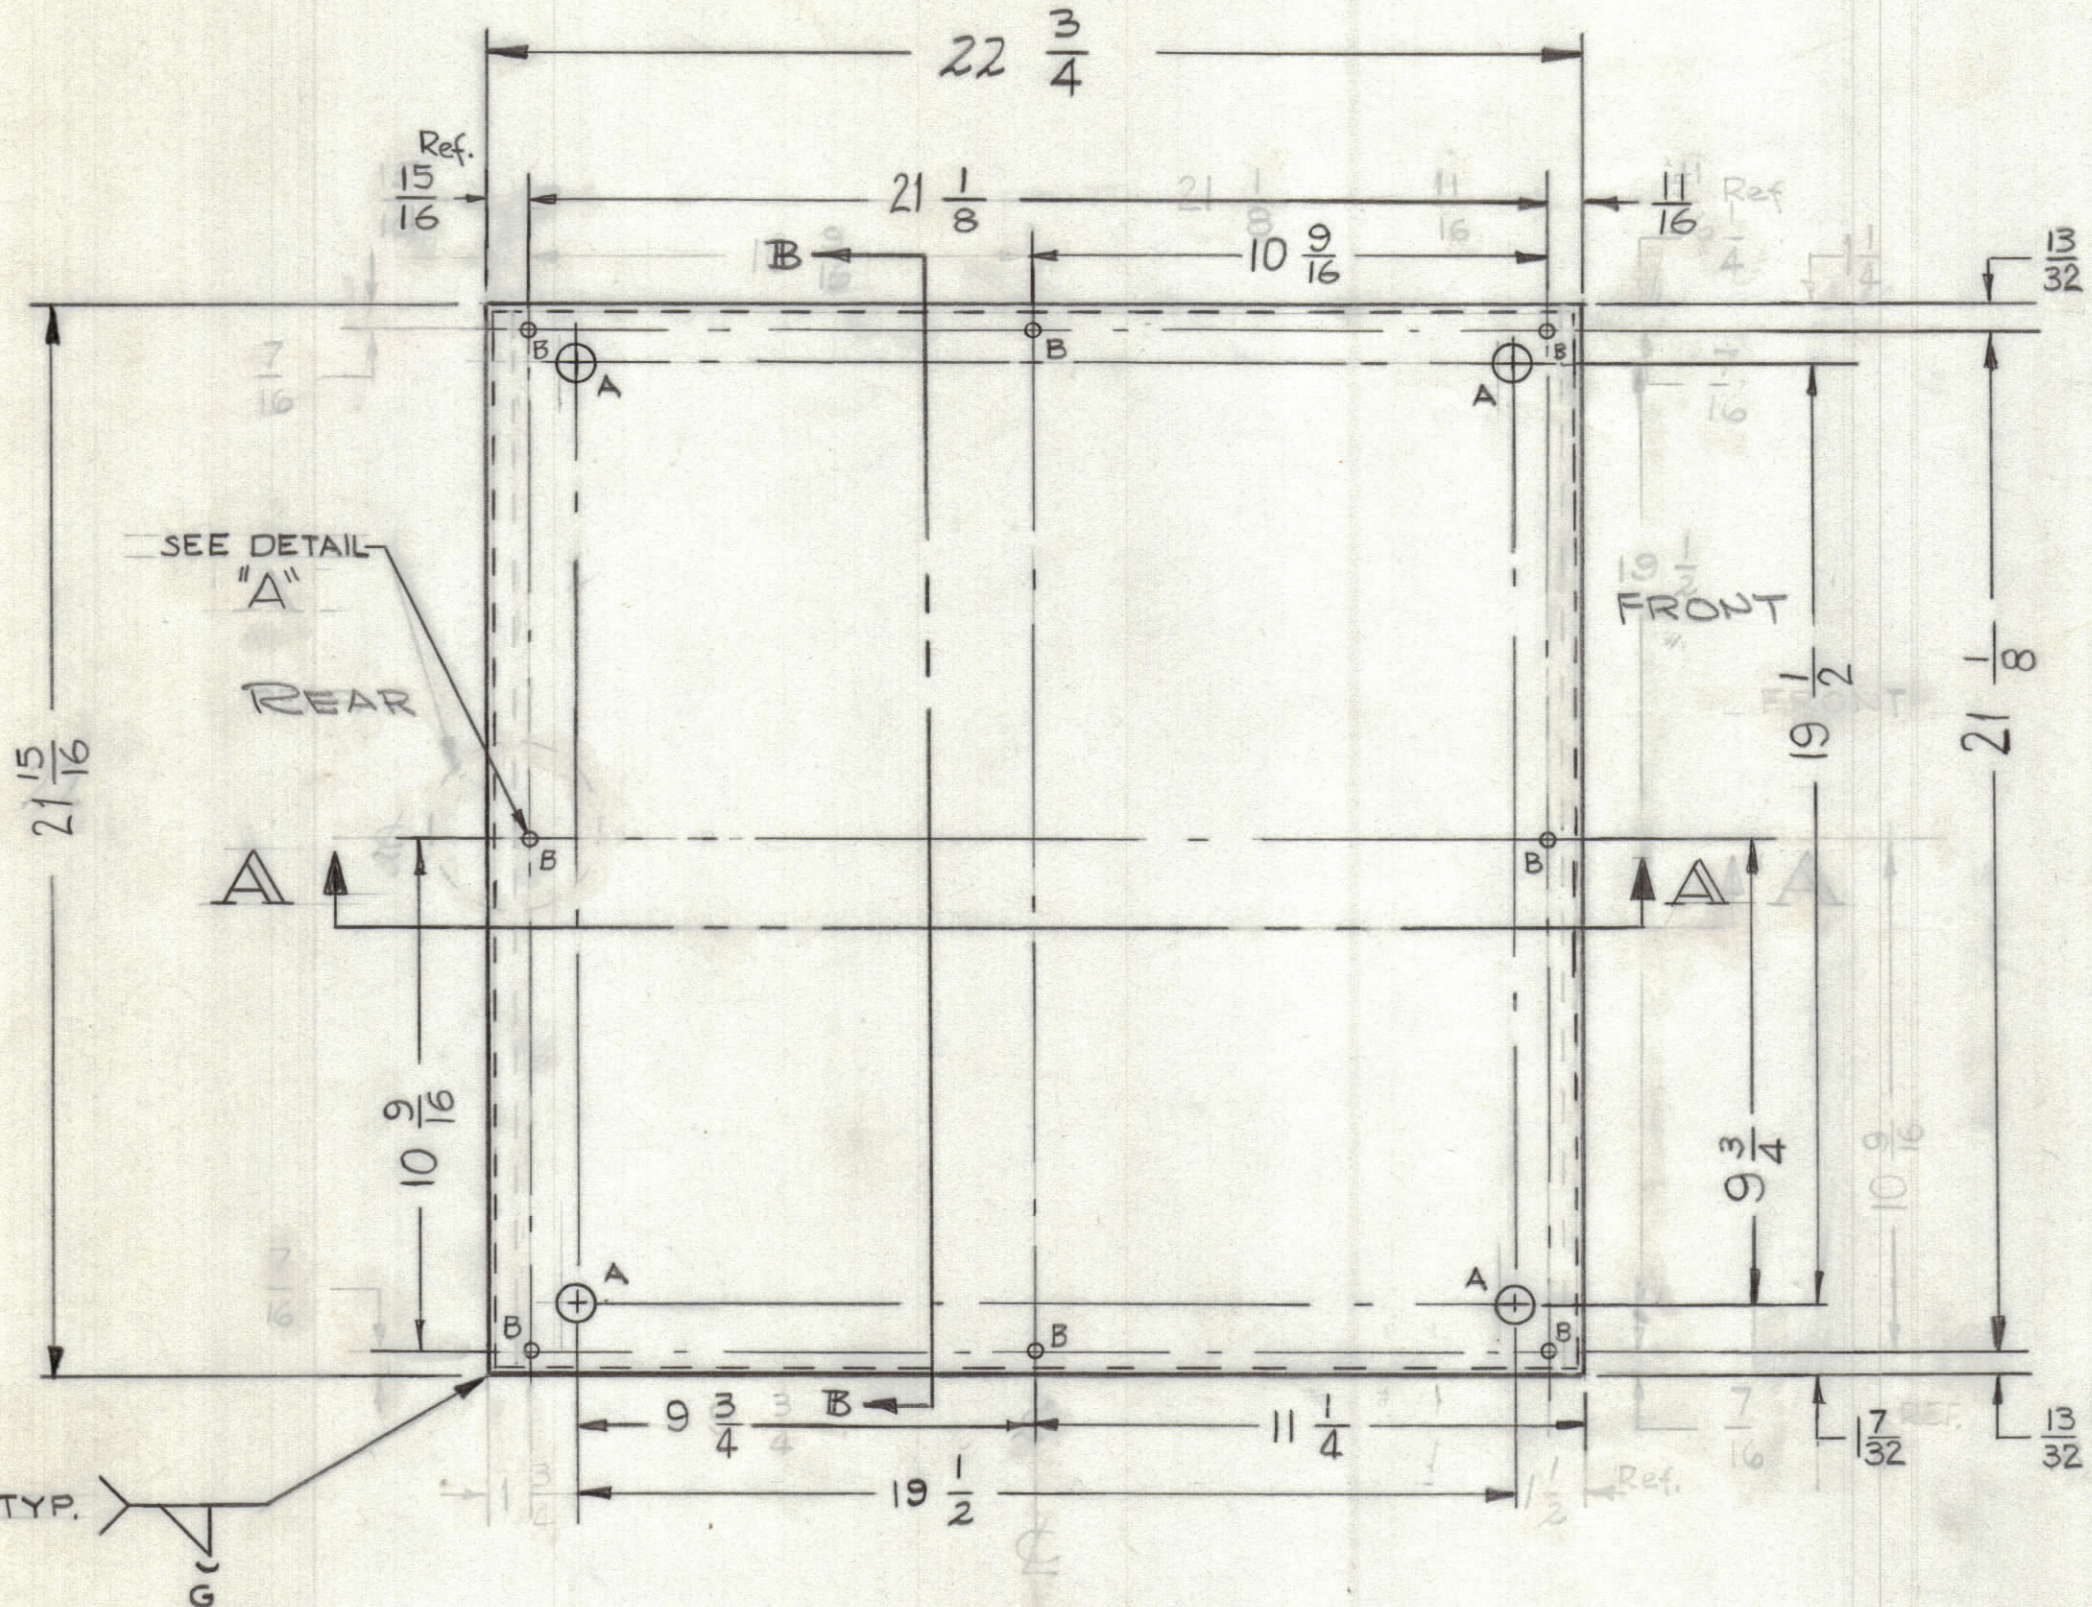

DETAIL "A"  
6 REQ'D.

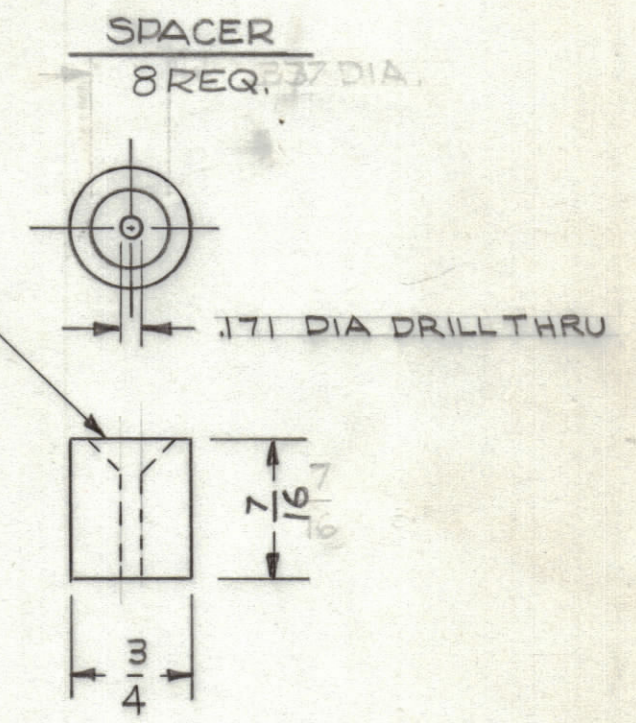

ITEM 2  
6-REQ'D.

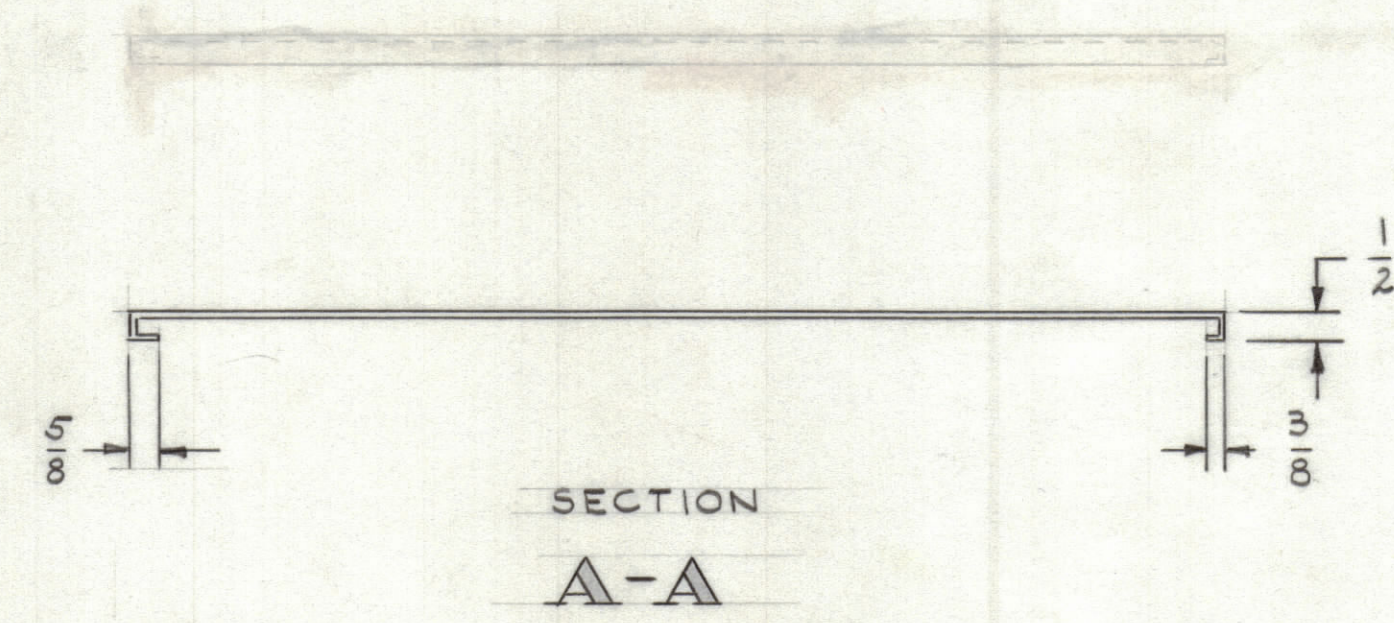

USE MATERIAL THICKNESS FOR MAX. RADIUS ON ALL BENDS UNLESS OTHERWISE SPECIFIED

FINISH NOTE: ALL SURFACES  
 S-404 YELLOW IRIDITE  
 S-114 ZINC CHROMATE PRIMER  
 S-220 RCAF BLUE GREY ENAMEL  
 (OR PRIME & PAINT TO CUST SPEC.)

NOTE: WELD ALL CORNERS & GRIND SMOOTH

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES AND INCLUDE  
 CHEMICALLY APPLIED OR PLATED FINISHES  
 TOLERANCES  
 DECIMALS  
 .X ± .05  
 .XX ± .01  
 .XXX ± .005  
 FRACTIONS  
 ± 1/64  
 ANGLES  
 ± 0° 30'

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS ± 1/64    DECIMALS ± .005    ANGLES ± 1/2°			SCALE 1/4" = 1" DO NOT SCALE					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES								

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	ACU			4-12-61

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		16 GA	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE	LEFT SIDE PANEL	
		COLD ROLL		
		TYPE & TEMPER	HEAT TREAT. SPEC.	
		SEE FINISH NOTE		
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			SHEET	OF