

REVISIONS		DATE	E.M.N. NO.	DRFT	CHG	APP
ZONE	DESCRIPTION	11.4.64		MS		

1 MOUNT AS SHOWN IN ALL "K" HOLES AFTER FINISHING

LEGEND		
HOLE	DESCRIPTION	REQ
A	1/4 DIA.	6
B	1/2 DIA.	3
C	3/4 DIA.	4

~NOTES~
 1. MATERIAL — .051 THK ALUMINUM - 6052-H32
 2. PERFORATIONS — .051 DIA. HOLES ON .0833 CENTERS, STAGGERED ROW
 ~UNLESS OTHERWISE SPECIFIED~
 1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS. 90°
 2. ALL ANGULAR BENDS. 90°
 3. REMOVE ALL BURRS & SHARP EDGES.

PERFORATED AREA

NOTE: TYPICAL LAYOUT OF "K" HOLES

METAL STAMPING PART NO. 1/8 HIGH GOTHIC ON OPPOSITE SIDE.

REF: DR-1305

QTY/UNIT	MODEL USED ON	ASBY. NO.
1	TTB-D	


QTY/UNIT	MODEL USED ON	ASBY. NO.
1	TTB-D	

QTY/UNIT	MODEL USED ON	ASBY. NO.
1	TTB-D	

QTY/UNIT	MODEL USED ON	ASBY. NO.
1	TTB-D	

QTY/UNIT	MODEL USED ON	ASBY. NO.
1	TTB-D	

QTY/UNIT	MODEL USED ON	ASBY. NO.
1	TTB-D	

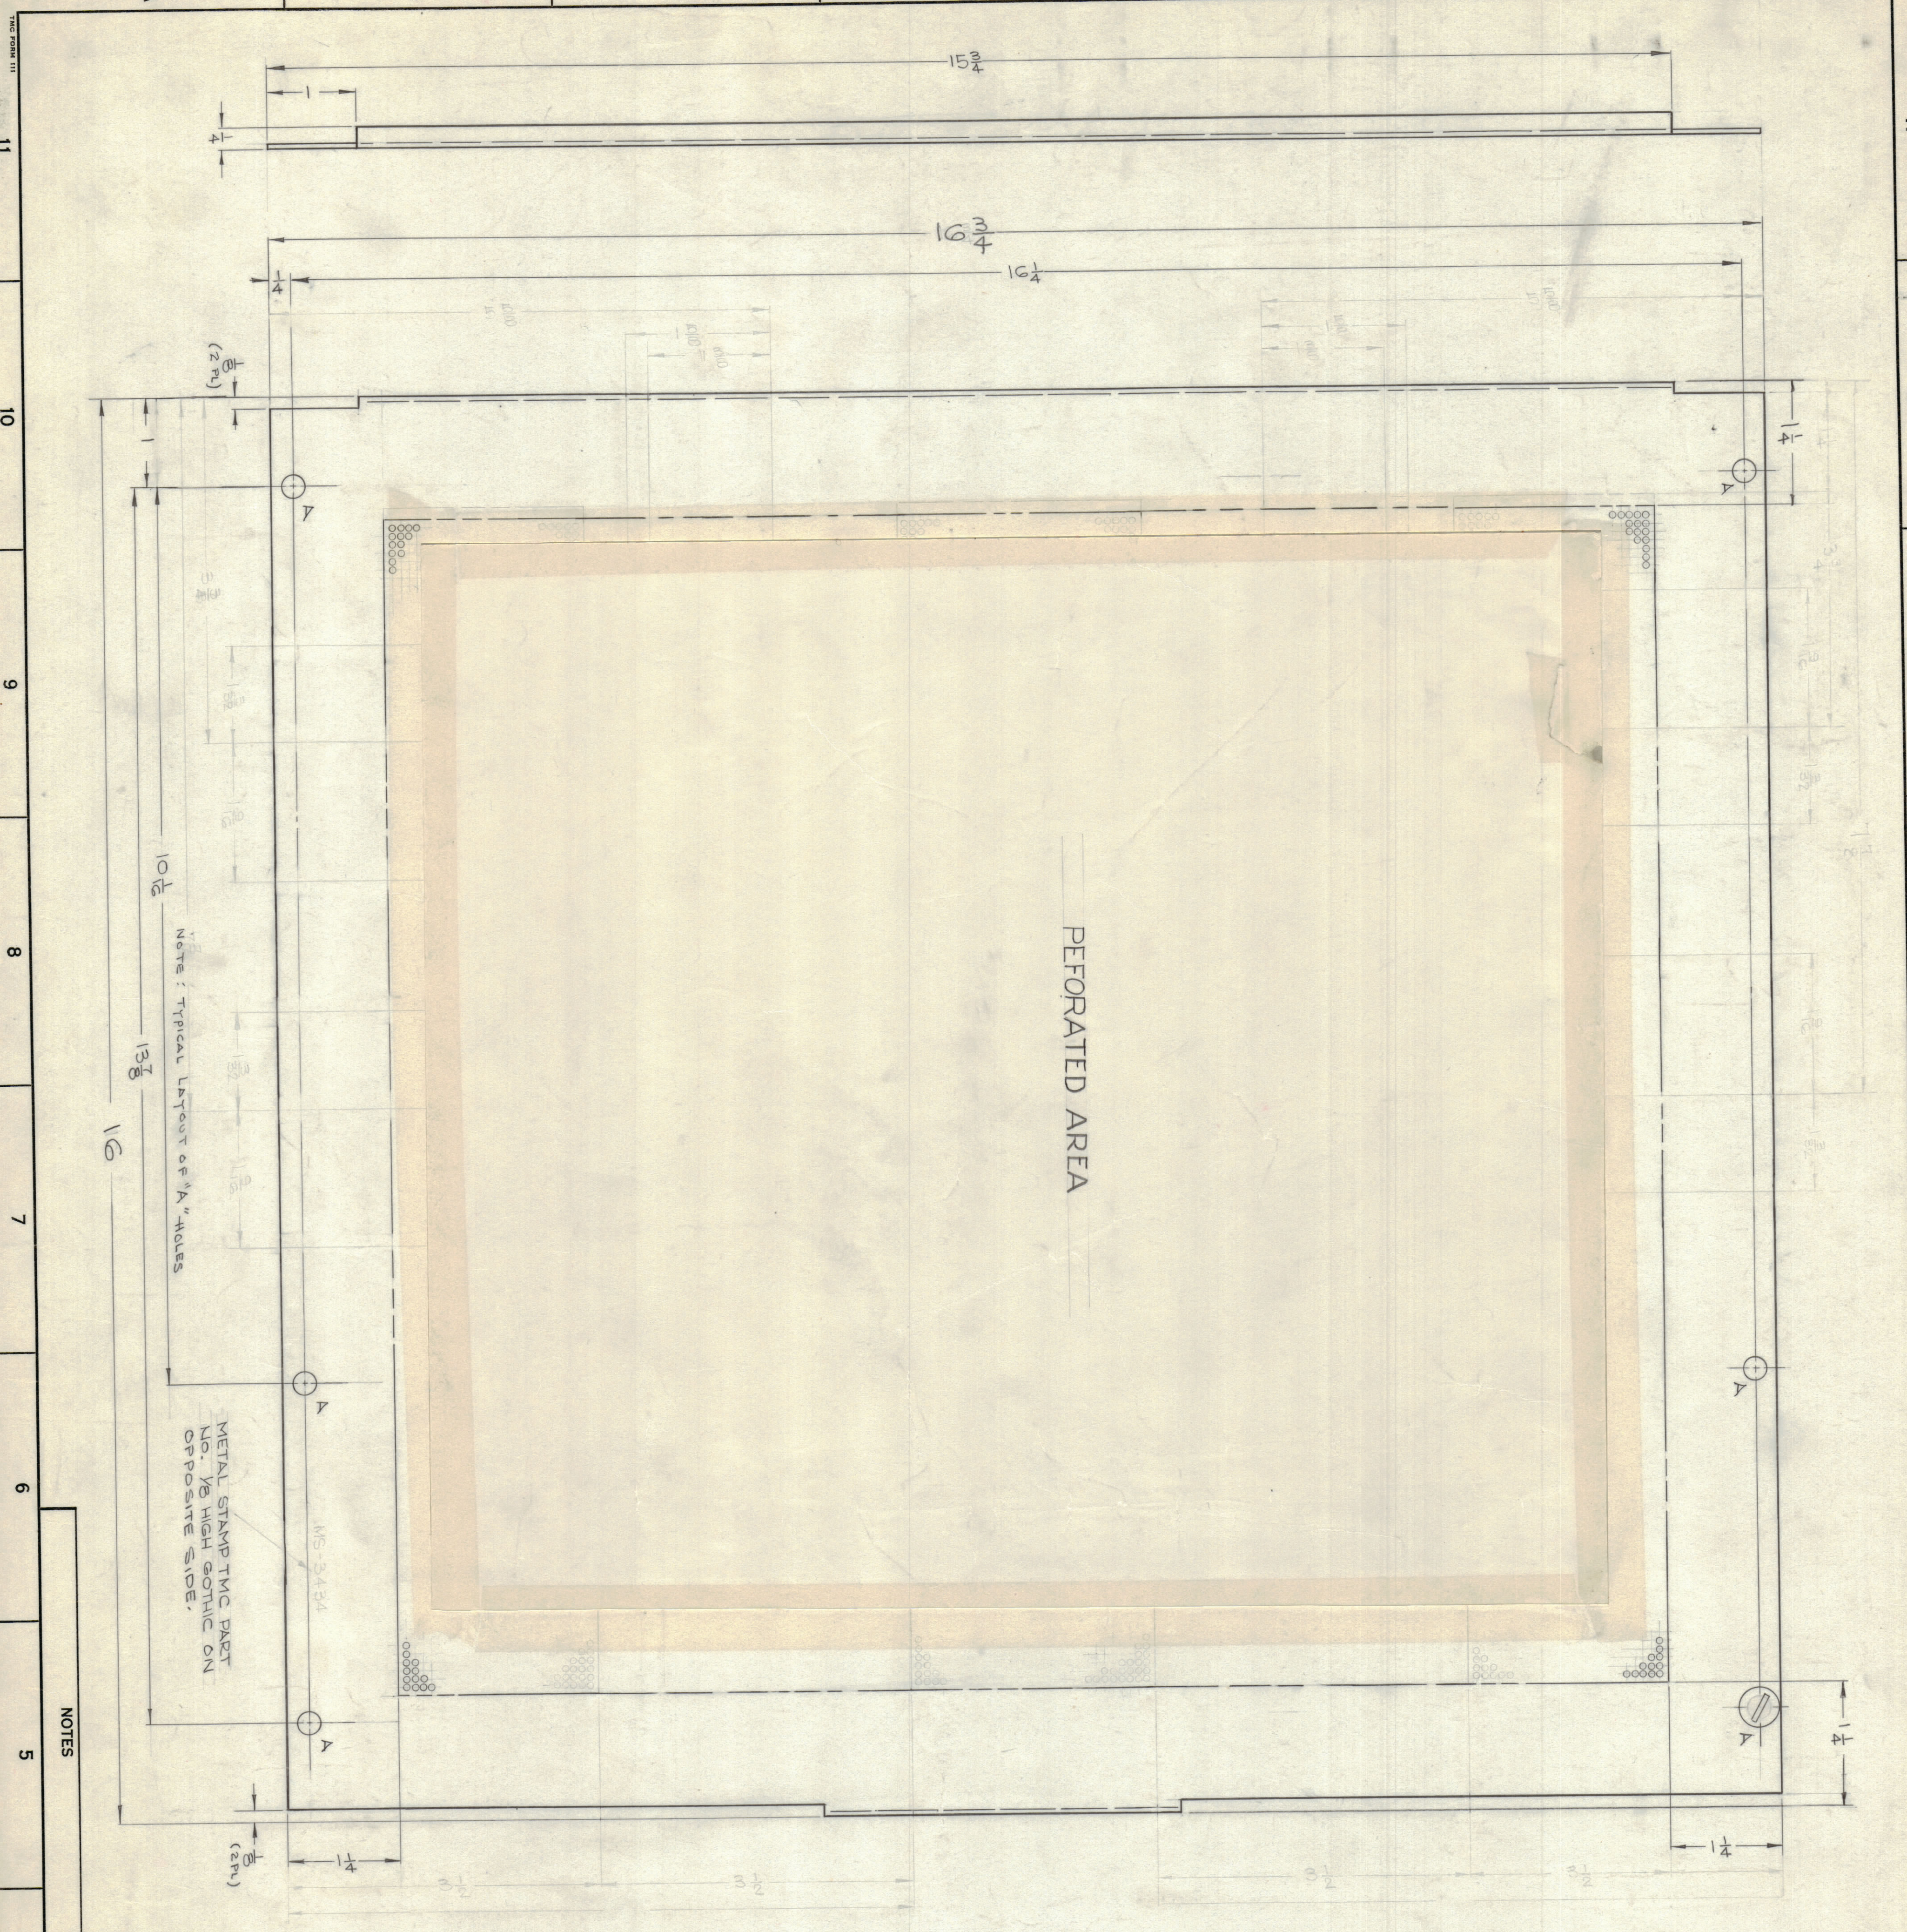

NOTES

QTY/UNIT	MODEL USED ON	ASBY. NO.
1	TTB-D	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIAL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

MS-3434 A

LIST OF MATERIAL
 THE TECHNICAL MATERIAL CORP.
 MAMARONECK, NEW YORK

COVER, TOP

DATE	FINAL APPROVAL	DATE
11/11/63	MS-3434	