| REVISIONS | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| ZONE | SYM | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD | APPD |
| | Ø | ORIGINAL RELEASE FOR PRODUCTION | 2/19/65 | -M- | HCA | | |

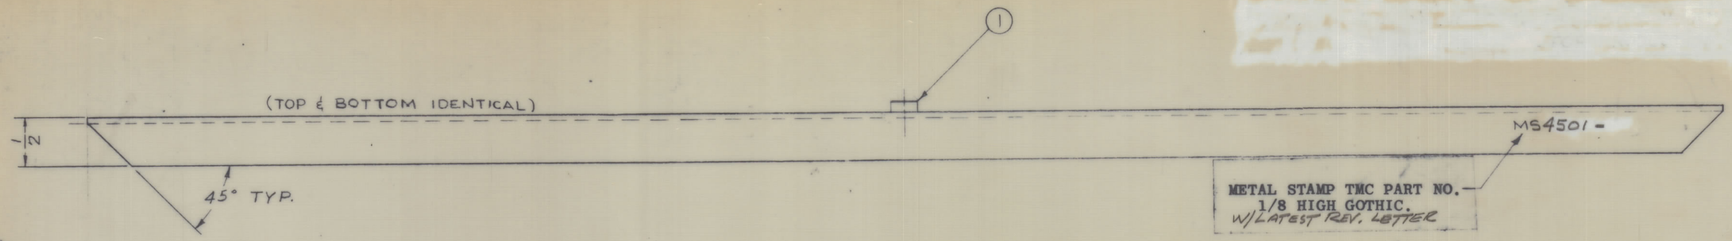


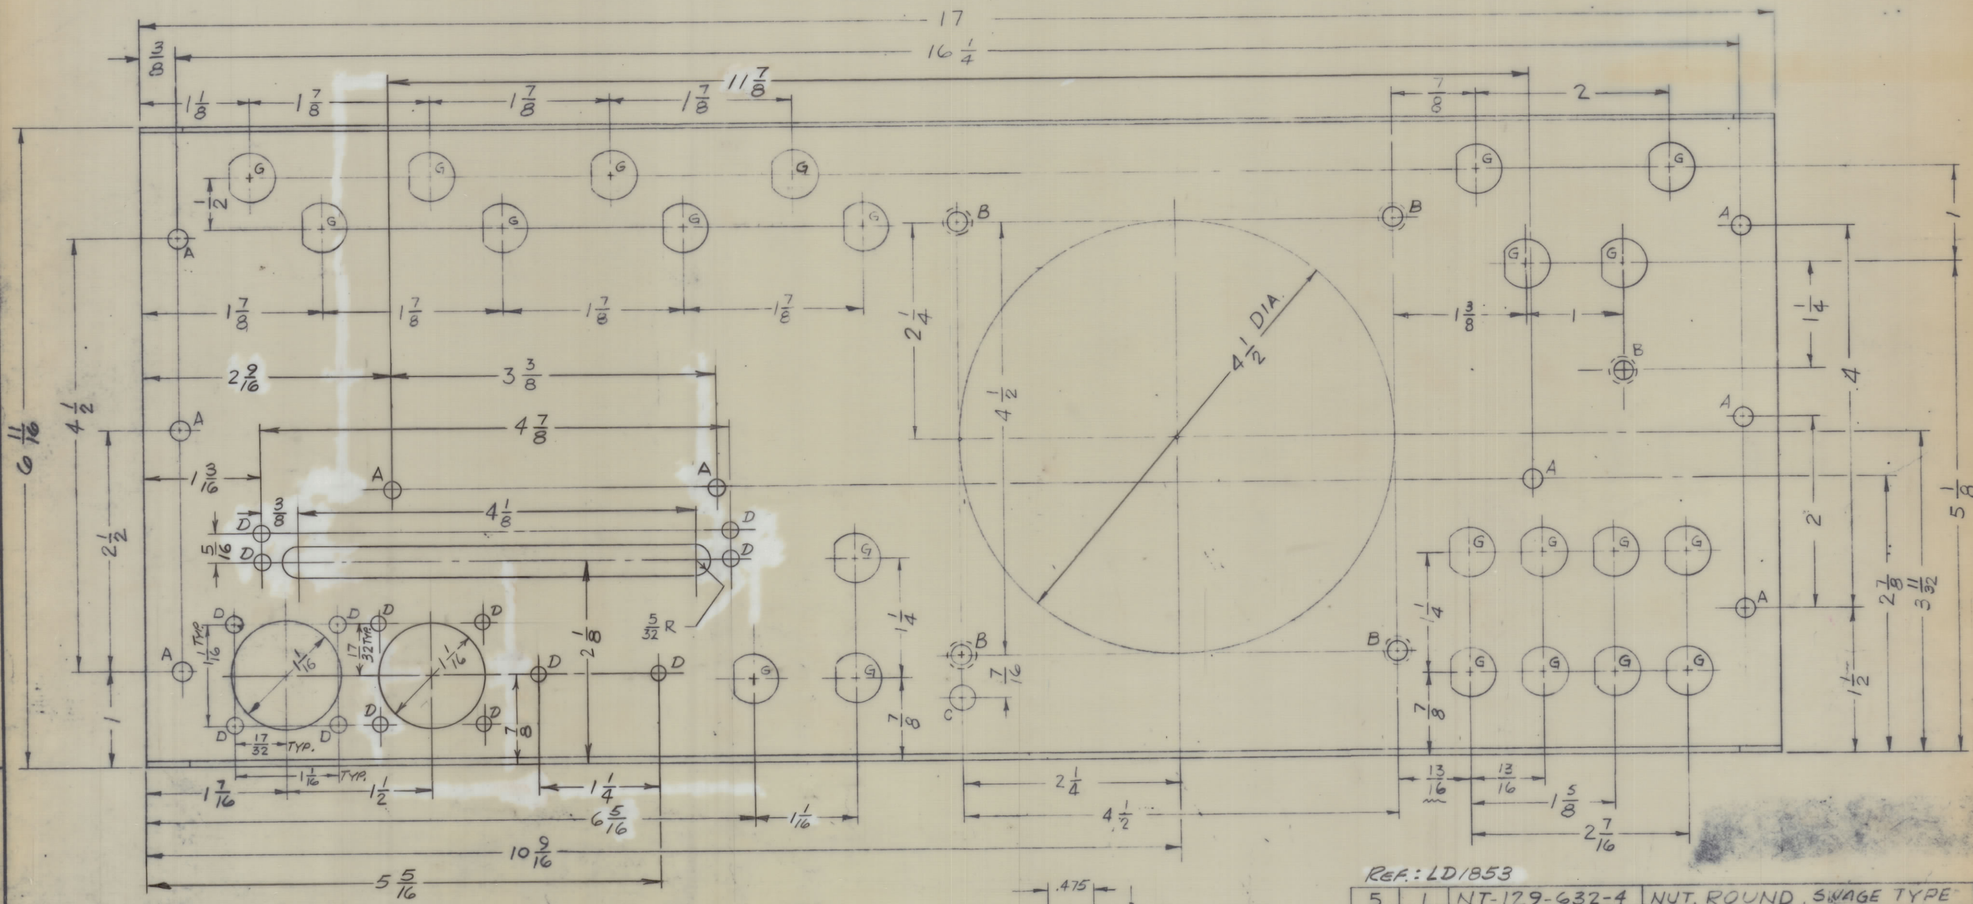


LEGEND

| HOLE | DESCRIPTION | REQ'D |
|---|---|---|
| A | 3/16 DIA | 9 |
| B | .194 - .191 DIA. | 5 |
| C | 1/4 DIA. | 1 |
| D | 11/64 DIA. | 14 |
| G | SEE DETAIL | 23 |

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

NOTES




DETAIL "G"

REF.: LD1853

| REQ'D. | ITEM | PART NUMBER | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| 5 | 1 | NT-129-632-4 | NUT, ROUND, SWAGE TYPE | B |

AALTONEN — LIST OF MATERIAL

| | |
|---|---|
| MATERIAL | .064 ALUMINUM 5052 H32 |
| FINISH | 5404 YEL. IRIDITE |
| TITLE | PLATE, REAR |

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

| Q'TY./UNIT | MODEL USED ON | ASS'Y. NO. |
|---|---|---|
| 1 | MSAA-1 | |

SCALE 1:1 — CODE

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

| | | | |
|---|---|---|---|
| DRAWN | H. AUSTIN | DATE | 4-12-65 |
| CHECKED | JCG | DATE | 4/19/65 |
| ELECT. DES. | | DATE | |
| MECH. DES. | | DATE | 4-19-65 |
| FINAL APPROVAL | | DATE | 4/19/65 |
| SHEET | MS4501 | REV. LTR. | Ø |

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

MS4501 Ø

TMC FORM 110 — STOCK NO. 40005