REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	X	EXP. RELEASE	4-8-65	1	RU		1313
	X1	② G Holes Added, 10½ Wall, DIM 2½ WAS 2, 5 WAS 5½	4-13-65	2	RU		1313
D2, 7 E7	X2	1 1/2 DIM WAS 1 3/4; 2 3/4 WAS 1 3/8; 1 1/8 WAS 2 1/2; "B" HOLE REQ'D WAS (5) DELETED "G"	4/23/65	3	J.L.	OK	1313
G3, 2	X3	ADDED 5 1/2 & 2" DIM'S	4/30/65	4	J.L.	OK	1313
	Ø	ORIG. RELEASE FOR PRODUCTION	4/30/65		J.L.		

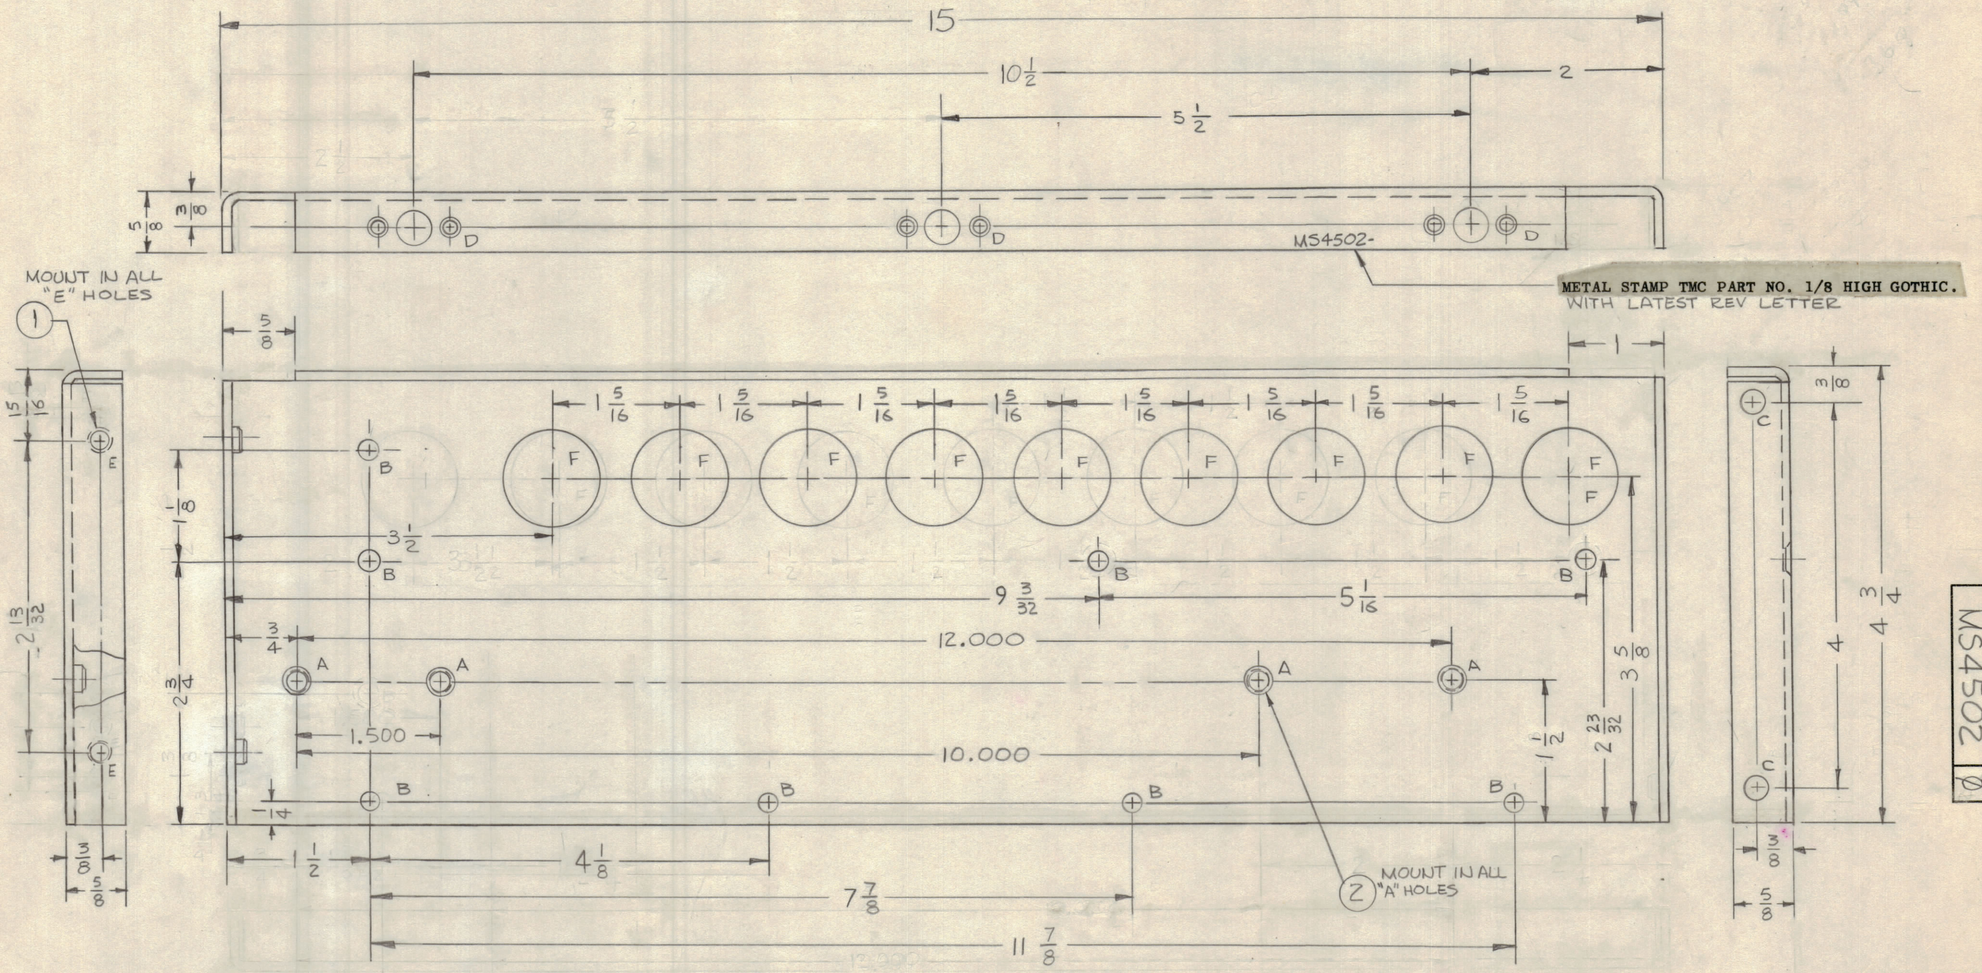

HOLE	DESCRIPTION	REQ
A	.250-.253 DIA.	4
B	3/16 DIA.	8
C	15/64 DIA	2
D	SEE DETAIL	3
E	.221-.224 DIA	2
F	1 DIA	8

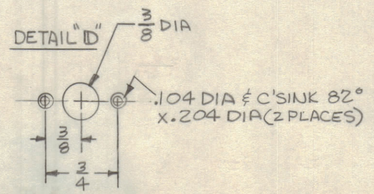

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
4	2	NT129-1032-4	NUT ROUND, SWAGE TYPE	A
2	1	NT129-832-4	NUT ROUND, SWAGE TYPE	E

F.E. EATON — LIST OF MATERIAL

MATERIAL .081 THK 5052-H32

FINISH YELLOW IRIDITE S404

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE PLATE, RIGHT SIDE

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
1	LRCD-1	
	LRCB-1	

SCALE FULL — CODE A

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS: X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

		DATE
DRAWN	R. UZZO	4-8-65
CHECKED	QCB	4/29/65
ELECT. DES.		DATE
MECH. DES.	C. Adams	4/29/65

FINAL APPROVAL F.E. Eaton — DATE 5/20/65

MS4502 Ø — SHEET — REV. LTR.

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

TMC FORM 110

REPROVEL NO. 440H 2133g

MS4502 Ø