
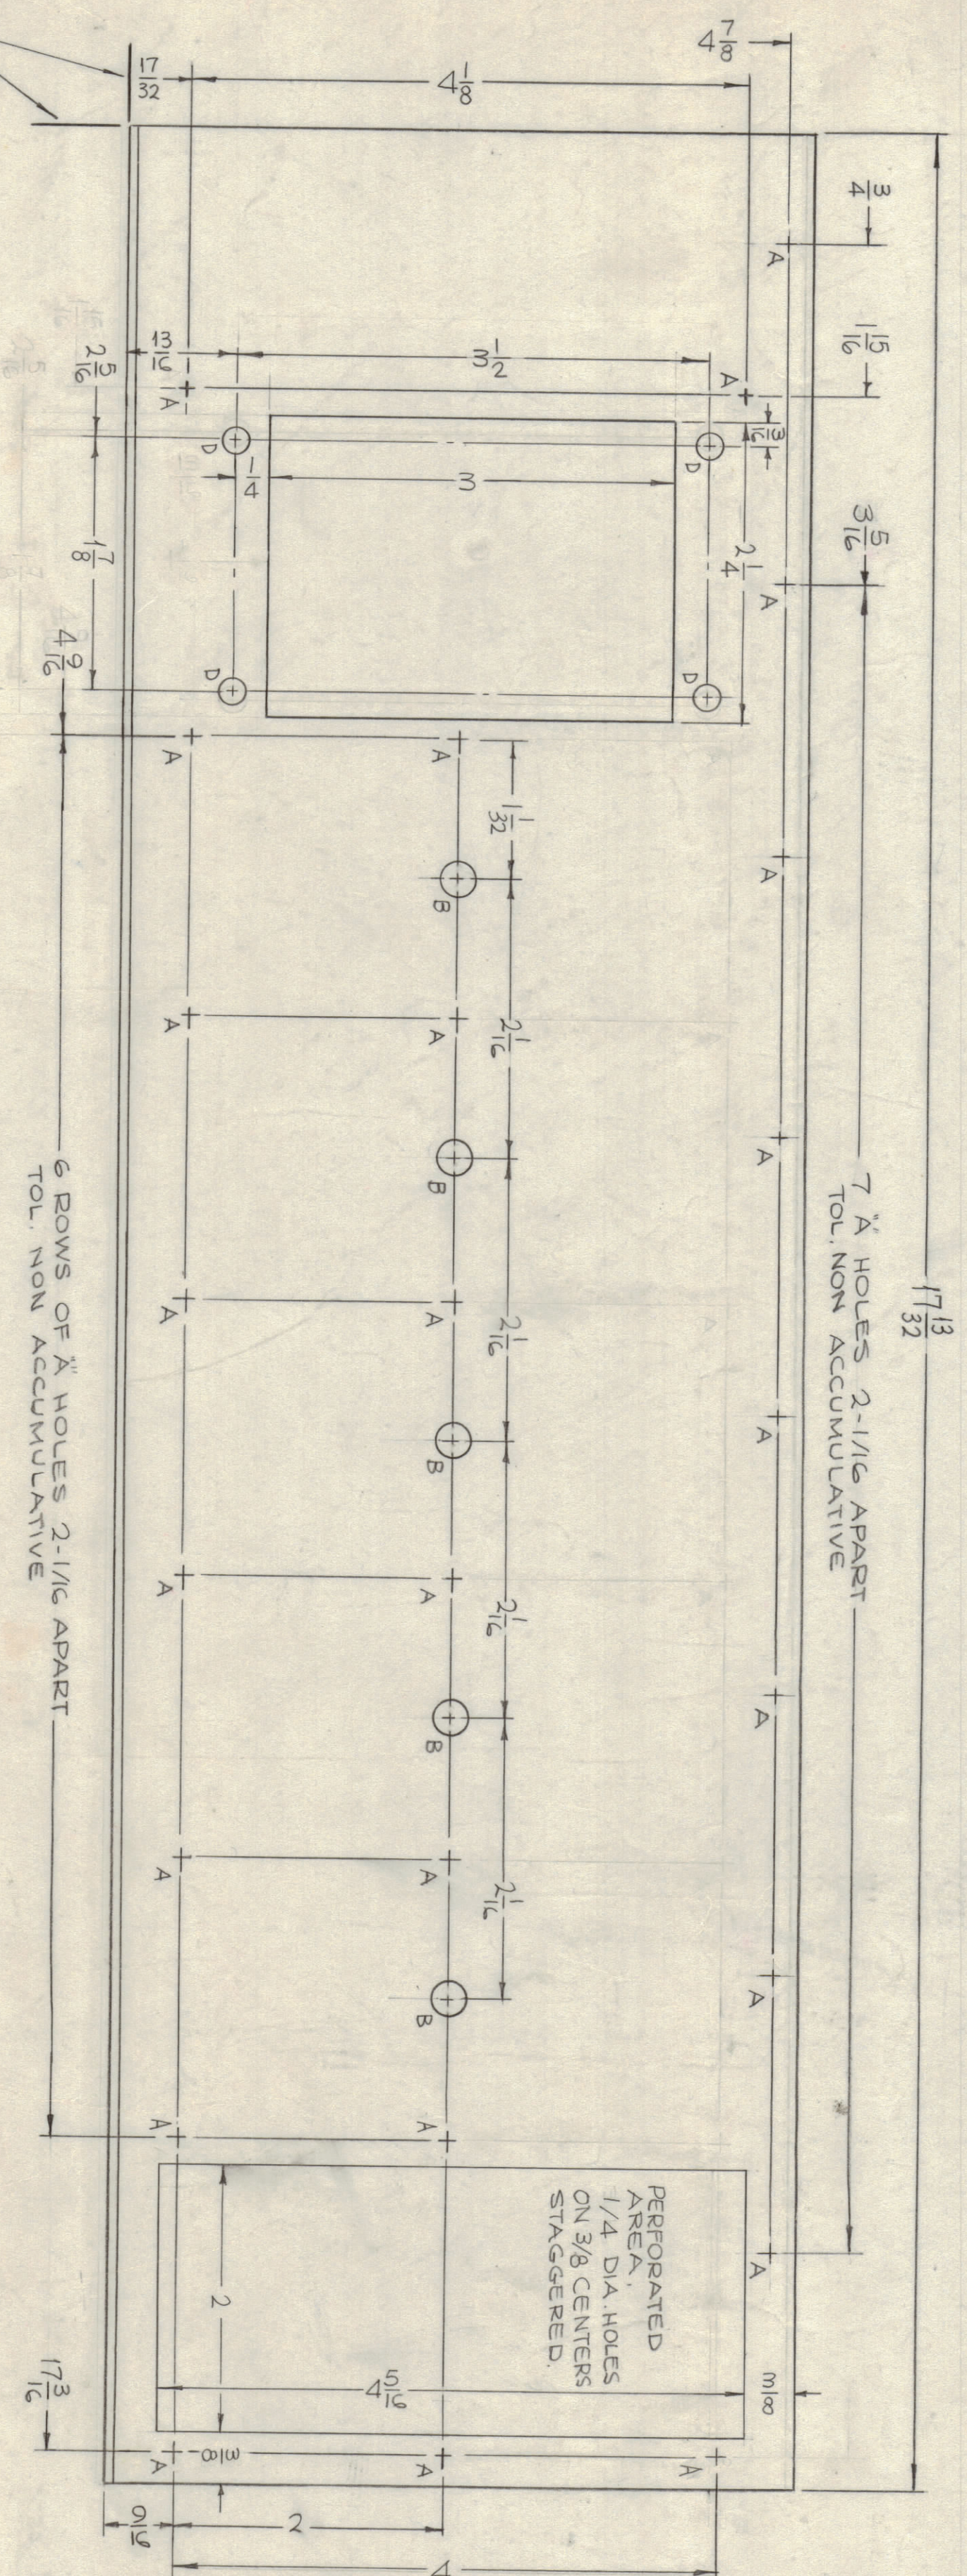


ZONE	SYM	DESCRIPTION	DATE	BY	CHKD	APPR
X1		PREPARATION 3/4" DIA. HOLES ADDED, SLOT ADDED	7-15-52	X1		
X2		3/8" DIA. HOLES ADDED	9-6-52	X2		
X3		3/8" DIA. HOLES ADDED	9-15-52	X3		
X4		ORIGINAL BELIEVED FOR PRODUCTION	5-14-54	X4		
F5		4 DIM. PHYSICAL LENGTH SHORTENED	2-3-57	17553	470	

REV.	DATE	BY	CHKD	APPR
1				
2				
3				
4				

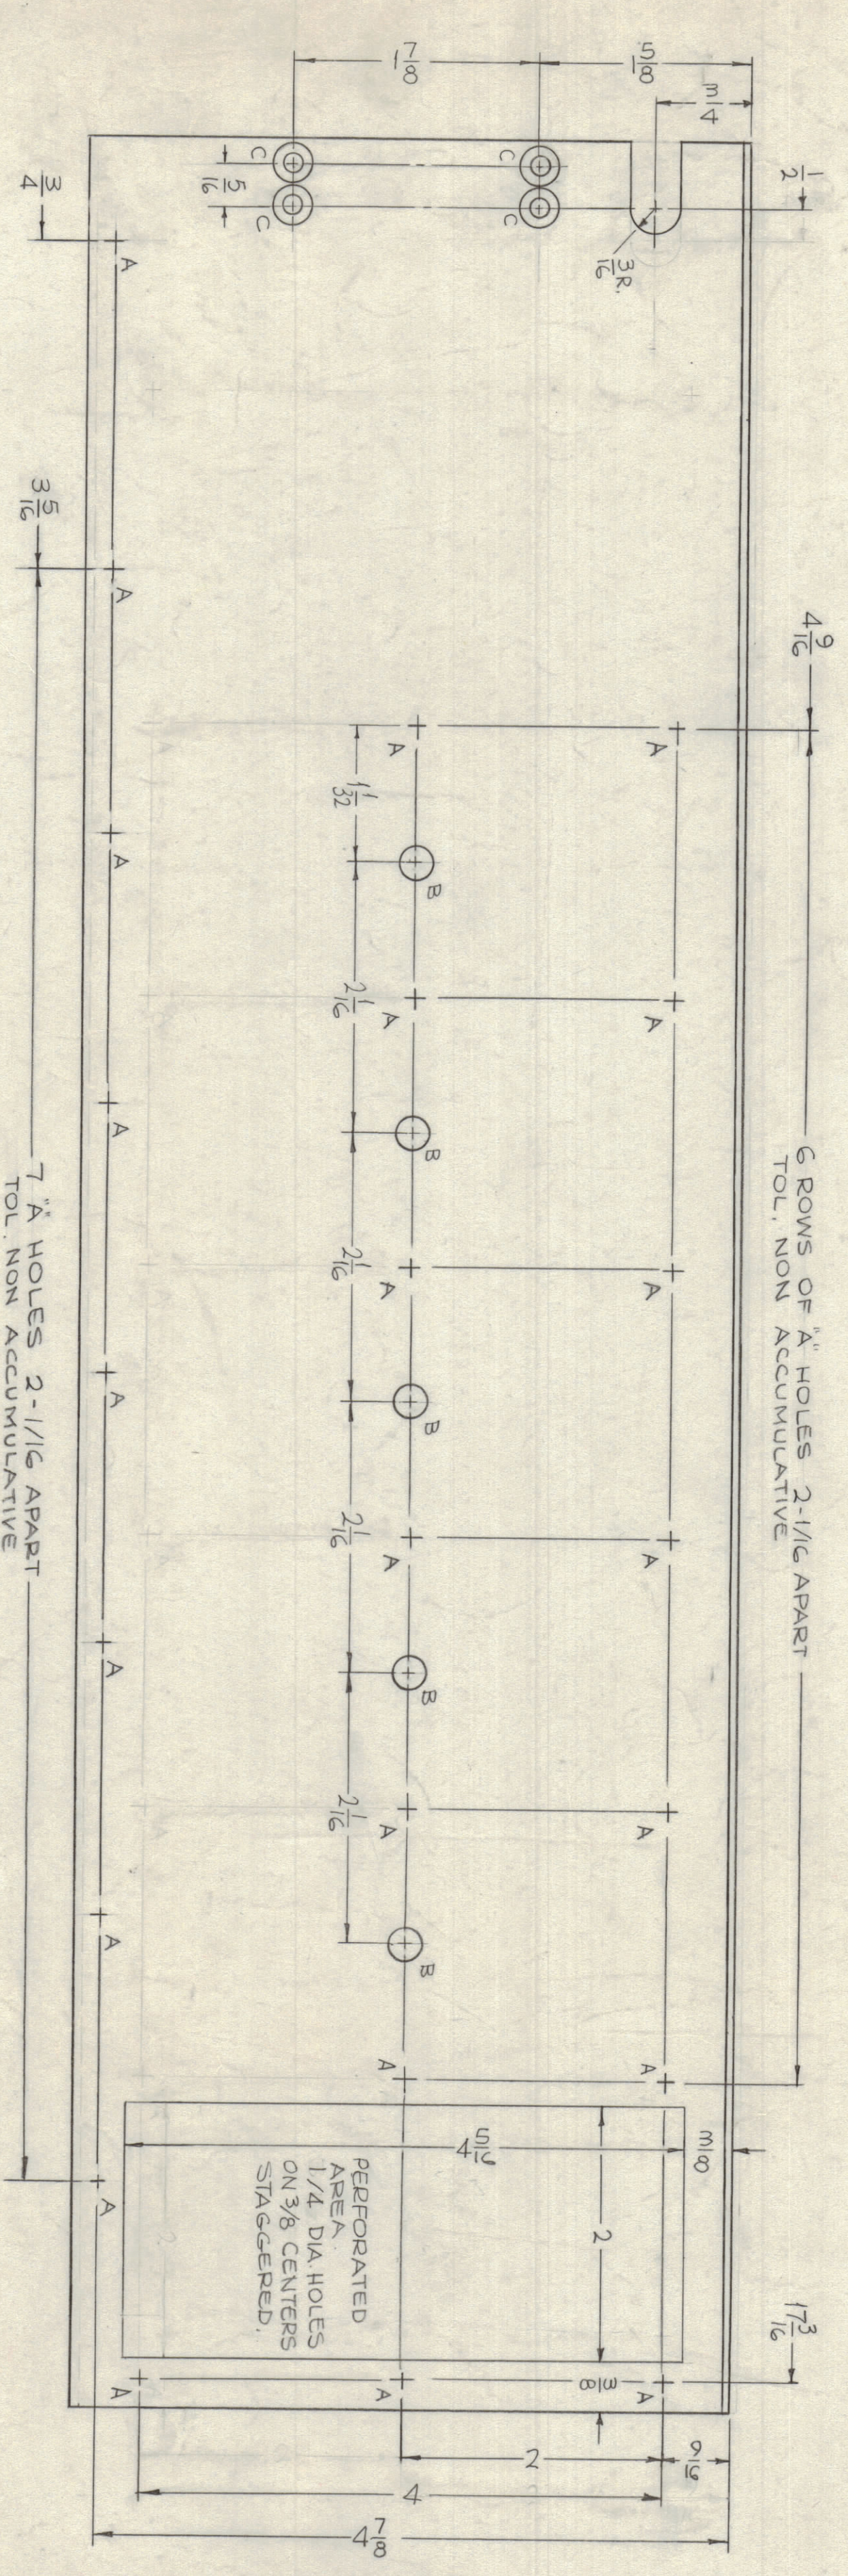

HOLES	DESCRIPTION	REQD
A	11/64 DIA.	48
B	1/4 DIA.	10
C	PER. 1/4 DIA. C'NTR. 82 1/2 DIA.	4
D	.191-.194 DIA.	4

- UNLESS OTHERWISE SPECIFIED:
- USE MATERIAL THICKNESS FOR MAXIMUM RADII ON ALL BENDS
 - ALL ANGULAR BENDS 90 DEGREES
 - REMOVE ALL BURRS AND SHARP EDGES
 - MOUNT INSERTS AFTER FINISHING

NOTES

REV.	DATE	BY	CHKD	APPR
1				
2				
3				
4				

QTY./UNIT	TST. LOCK	MATERIAL CODE	ASST. NO.
1		A	

REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NO. 1	DATE	DATE	DATE
1	3-3-52	3-3-52	3-3-52

REVISIONS	DATE	BY	CHKD	APPR
1				
2				
3				
4				

4	NT129-632-4	NUT, PLAIN, SPLINE	D
3	NT129-632-4	NUT, PLAIN, SPLINE	D
2	NT129-632-4	NUT, PLAIN, SPLINE	D
1	NT129-632-4	NUT, PLAIN, SPLINE	D

4	NT129-632-4	NUT, PLAIN, SPLINE	D
3	NT129-632-4	NUT, PLAIN, SPLINE	D
2	NT129-632-4	NUT, PLAIN, SPLINE	D
1	NT129-632-4	NUT, PLAIN, SPLINE	D

MOUNT ON 'D' DETAIL

MADE THIS PART NO. (MS 4660) 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

PERFORATED AREA 1/4 DIA. HOLES ON 3/8 CENTERS STAGGERED.

PERFORATED AREA 1/4 DIA. HOLES ON 3/8 CENTERS STAGGERED.

PERFORATED AREA 1/4 DIA. HOLES ON 3/8 CENTERS STAGGERED.

PERFORATED AREA 1/4 DIA. HOLES ON 3/8 CENTERS STAGGERED.

PERFORATED AREA 1/4 DIA. HOLES ON 3/8 CENTERS STAGGERED.

PERFORATED AREA 1/4 DIA. HOLES ON 3/8 CENTERS STAGGERED.