


| REVISIONS | | | | | | | |
|-----------|-------|------|----------|-----|---|----------|----------|
| E.M.N.O | DRAFT | CHKD | ZONE | LTR | DESCRIPTION | DATE | APPROVED |
| 7 | RU | | B7 | X1 | (3) C HOLES DELETED | 3-6-80 | |
| | GDL | | | | ORIGINAL RELEASE FOR PRODUCTION | 3-6-80 | |
| 21791 | RU | | A4 | A | DIM 3/32 WAS 7/8, 2 7/16 WAS 2 5/8 | 5-14-80 | |
| 21901 | GDL | | A6 D6 | B | CHANGE DIMS FROM 13 3/32 TO 12 13/16 & 7 1/2 TO 7 5/8 | 9-22-81 | |
| 22111 | GDL | | C5 | C | TWO F HOLES ADD | 10-23-85 | |
| | GDL | | C5 | D | 2 A ADD THREE SLOT DELETED 2 F HOLE DELETED | 8-20-91 | |
| | FB | | C5 | E | CHANGED LOC. 2 A HOLES (NEW XPR) | 8-12-92 | |

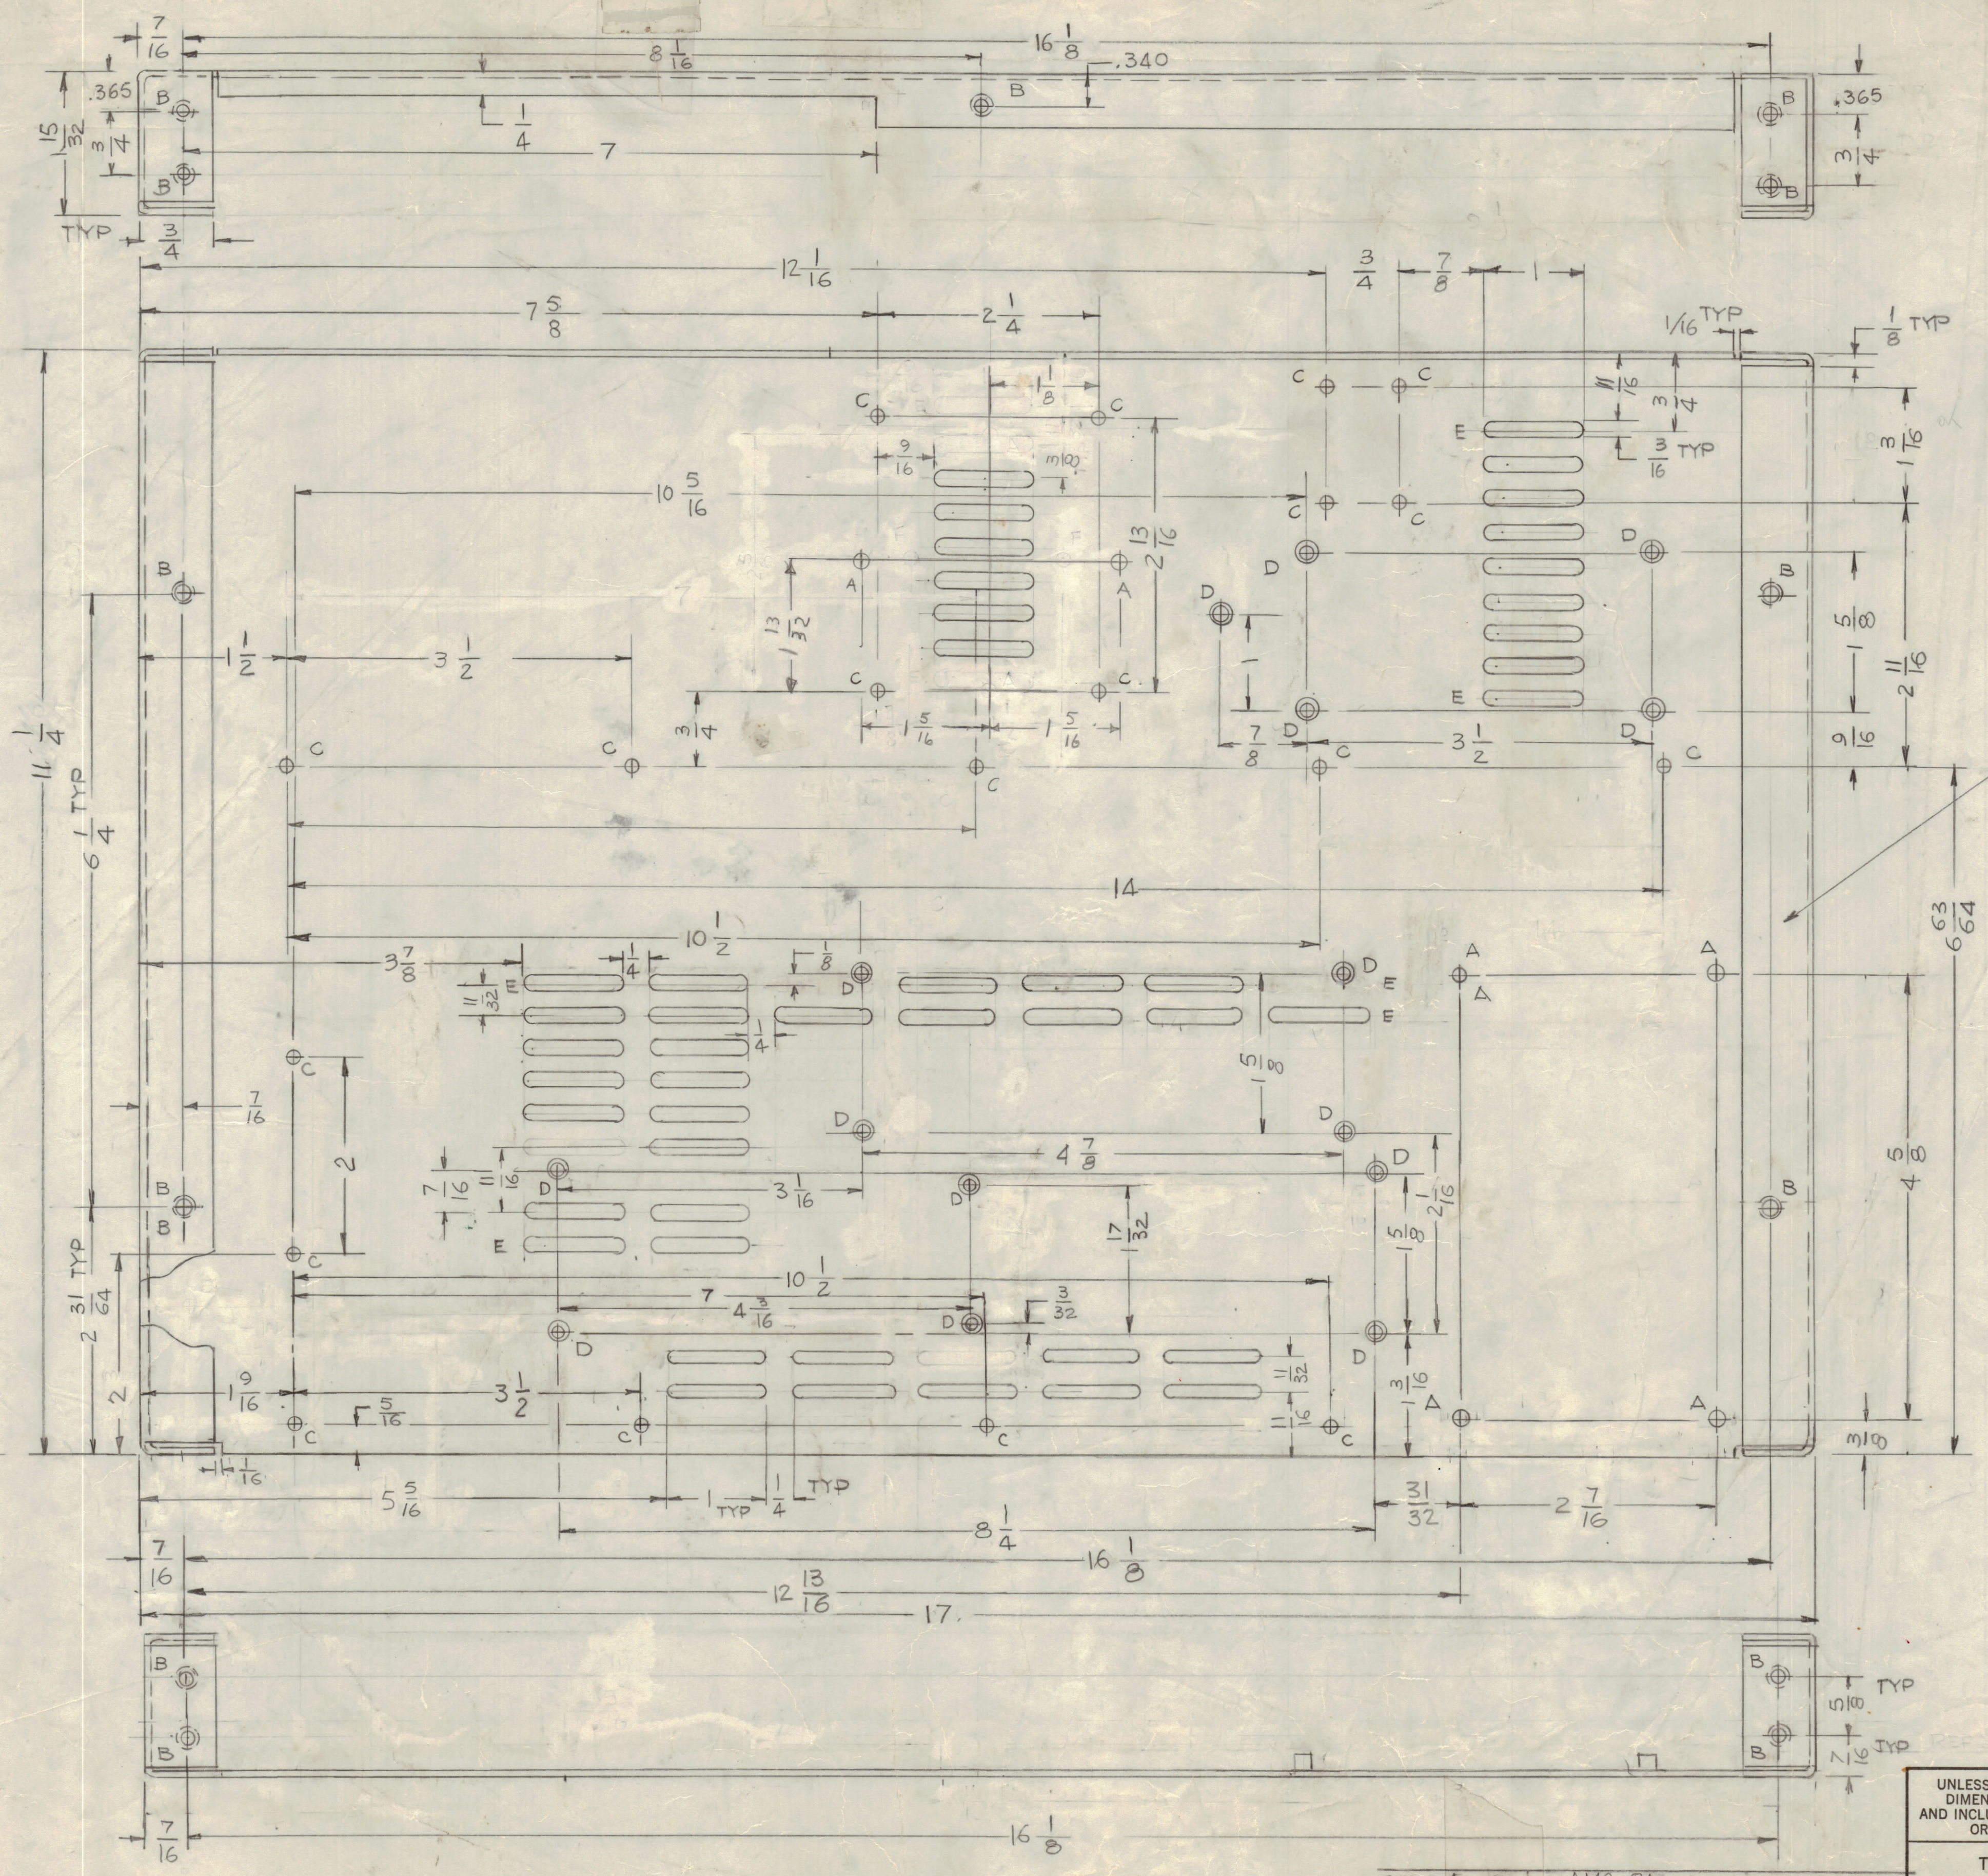

MARK TMC P/NO 1/8 HIGH GOTHIC WITH LATEST REVISION LETTER

HOLES

| | |
|--------------------|----------|
| A - 11/74 DIA | 6 REQ'D |
| B - .191-.194 DIA | 12 REQ'D |
| C - 9/64 DIA | 19 REQ'D |
| D - .189 DIA | 15 REQ'D |
| E - 3/16 X 1" SLOT | 63 REQ'D |
| F - 5/32 DIA | 6 REQ'D |

UNLESS OTHERWISE SPECIFIED:

- USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
- ALL ANGULAR BENDS 90 DEGREES.
- REMOVE ALL BURRS AND SHARP EDGES.
- MOUNT INSERTS AFTER FINISHING.

| 15 | 2 | TE 164-1 | STAND OFF | D |
|-----------|------|--------------|-------------|--------|
| 12 | 1 | NT129-0632-4 | NUT, ROUND | B |
| QTY. REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |

| LIST OF MATERIAL | | | | | |
|------------------|---------|--|----------------|---------|-------|
| FINAL APPROVAL | DATE | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | | |
| MECH. DES. | DATE | CHASSIS | | | |
| ELECT. DES. | DATE | | | | |
| CHECKED | DATE | | | | |
| DRAWN | DATE | SIZE | CODE IDENT NO. | DWG NO. | ISSUE |
| G.D.L. | 12-3-79 | D | 82679 | MS6980 | E |
| SCALE 1:1 | | | SHEET OF | | |

| | | |
|---|---------------|-----------|
| AMC-BA | | |
| QTY / UNIT | MODEL USED ON | ASS'Y NO. |
| APPLICATION | | |
| CODE | | |
| MATERIAL .063 THK AL. ALLOY 3052-H32 | | |
| FINISH S404 YEL. IRIDITE | | |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON

| | |
|-------------|-----------|
| DECIMALS | FRACTIONS |
| .X ± .05 | ± 1/64 |
| .XX ± .01 | ANGLES |
| .XXX ± .005 | ± 0°-30' |

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.