B

PL-150

SPECIFICATIONS

SERIES ~ QDS W/SWITCH PLATE
Nº OF CONTACTS ~ ONE (1)
TYPE OF CONTACT ~ MALE
DIELECTRIC ~ TEFLON

ELECTRICAL DATA

MAX. PEAK VOLT. ~ 5,000 V.
FREQ. LIMIT ~ 10,000 MCS
NOM. IMPEDANCE ~ 50Ω

CABLE ACCOMODATIONS

TYPE ~ RG-8/U, RG-10/U, RG-11/U, RG-12/U

MATERIAL

EXTERNAL PARTS ~ BRASS
CONTACT ~ BRASS ; GASKETS ~ SILICONE RUBBER

FINISH

EXT. PARTS - SILVER PLATE & RHODIUM FLASH.
CONTACT ~ SILVER PLATE & GOLD FLASH.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

CABLE INSTRUCTIONS

NOTE:
USE TMC SPEC. S-345.

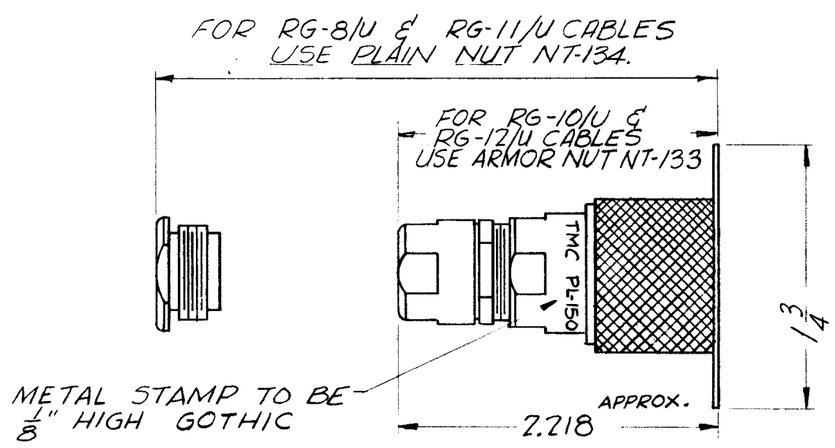

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	REVISED & REDRAWN FROM 1 SIZE	5/15/61	H	DGM	DCB	[illegible]

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE: S-401-70(3109)

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
				5/15/61

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CONNECTOR, PLUG, QDS SERIES
UNIVERSAL W/PLATES

DRAWN: DGP pom | CHECKER: DCB | FINAL APPROVAL: [illegible]

ELEC. DES. APP. | MECH. DES. APP.: [illegible]

PL-150 B

TMC FORM NO. 109

DEFIANCE NO. 1020 36352