


SPECIFICATIONS ~
 AMPS - 15
 CYCLES - 60
 VOLTS - 230V AC
 CURVE - 4

S401-58 (XAM 44)
 S401-410 (APL 33-60HZ-15A-D6)

SCHEMATIC ~

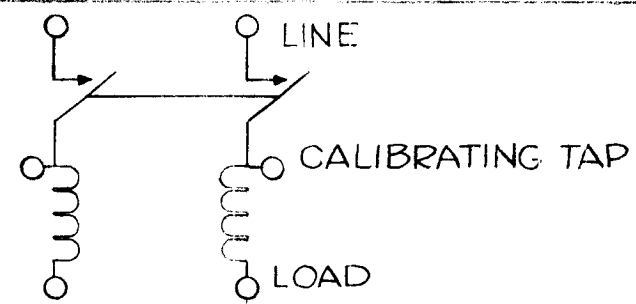

E		CURVE 4 WAS 5	9/14/70	19974	d/m	(C)	IBC
D		COMPLETELY REVISED	9/11/67	18399	H.G.		
C		DIM. CLARIFIED 6-32" INSERT WAS "TAP"	5.18.66	16262	WAS		
B	1	DIMS 23/32, V8, #1 1/8 ADDED	3-1-63	8334			
A	1	6-32 TAP FOR MOUNTING HOLES ADDED	2-19-60	3746	OH B F		
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
			CIRCUIT BREAKER, DUAL, CALIBRATING TAP	
			J.C. Biele	
			DRAWN	CHECKED
			FINAL APPROVAL	
			SW 261 E	

TOLERANCES
 DEC. DIM. ±
 FRAC. DIM. ± 1/64
 ANGULAR DIM. ±

SCALE: S401-58 (XAM 44)

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES