REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	O	ORIGINAL RELEASE FOR PRODUCTION	5.18.64		JTB		
	A	COMPLETELY REVISED	3-15-66	15914	C.D.L		
	B	CHG'D 2-3/8 DIM TO 2-5/8	12-13-66	17447	RME		
	C	P/N JL3-F400 WAS ETI-5765, PICTORIAL CLAR.	9-13-67	18473	ENJ		

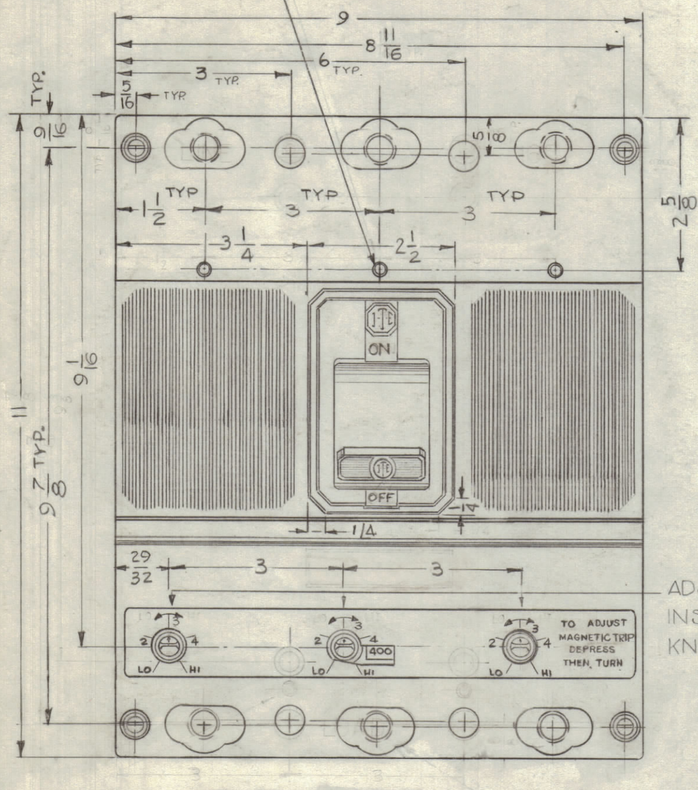

(FRONT VIEW)

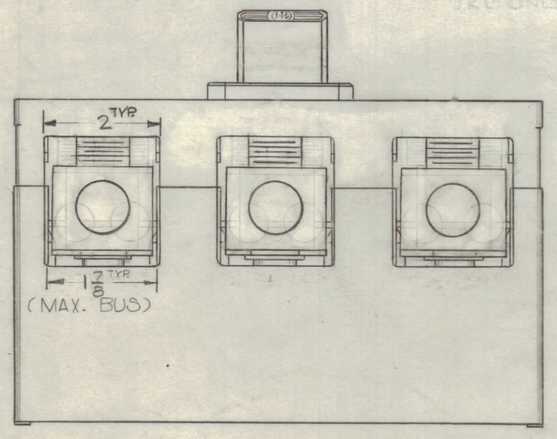

(BOTTOM VIEW)

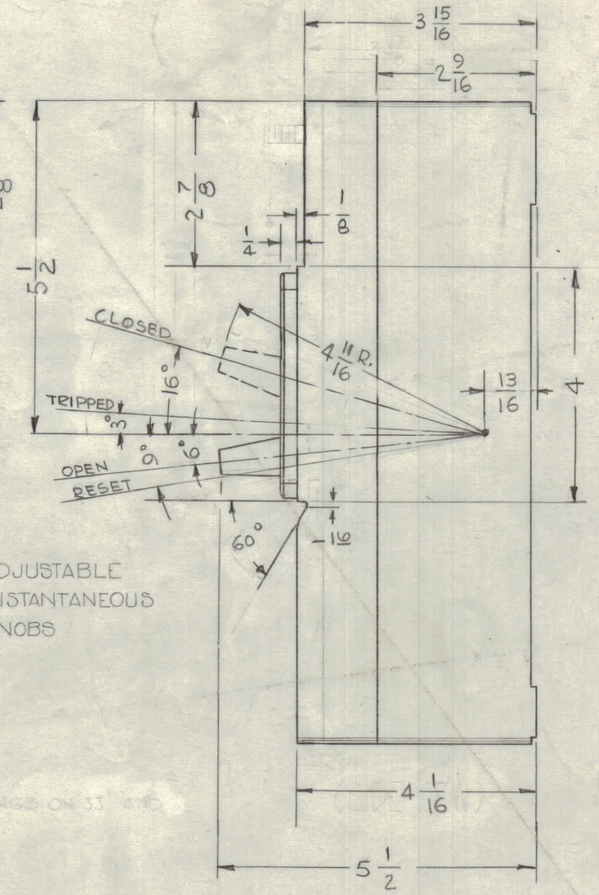

(SIDE VIEW)

BREAKER MOUNTING HOLE LOCATION USE 1/4-20 MTG. SCREWS

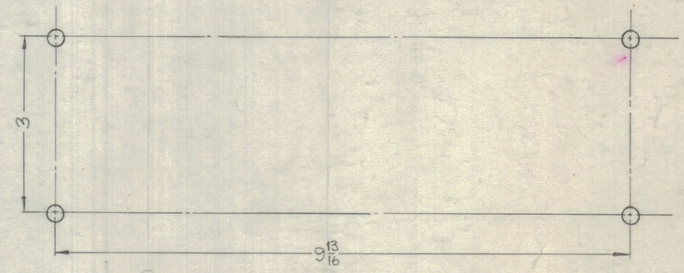

ELECTRICAL SPECIFICATION

AMP RATING - 400
3 POLE - 600 VAC INTERCHANGEABLE TRIP
FRAME "JL"
ADJUSTABLE INSTANTANEOUS MAGNETIC TRIP ONLY.

NOMINAL INSTANTANEOUS TRIP SETTINGS - AMPERES A.C.				
LO	2	3	4	HI
3200	3600	4100	5100	5600

NOTE:

DC - ADD 15% TO NOMINAL
TOLERANCE ON ALL SETTINGS ± 10%
CIRCUIT BREAKER TO BE SHIPPED, BY VENDOR, COMPLETELY ASSEMBLED.

SW-328 C

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F. BUDETTI		LIST OF MATERIAL		

MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH		TITLE: CIRCUIT BREAKER	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN J.F. VITRO	DATE	FINAL APPROVAL
	CHECKED aa	DATE	DATE
DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'	ELECT. DES.	DATE	SW-328 C
	MECH. DES.	DATE	SHEET — REV. LTR.

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
	GPT-200K	AP-109,111
SCALE	CODE	S401-88 (JL3-F400)

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES

TMC FORM 110