


NOTE:
* USE UG260/U

REQ. PER UNIT	USED ON			UG-260*/U	D
	MODEL	ASS'Y. NO.	DATE		
			7-10-63		

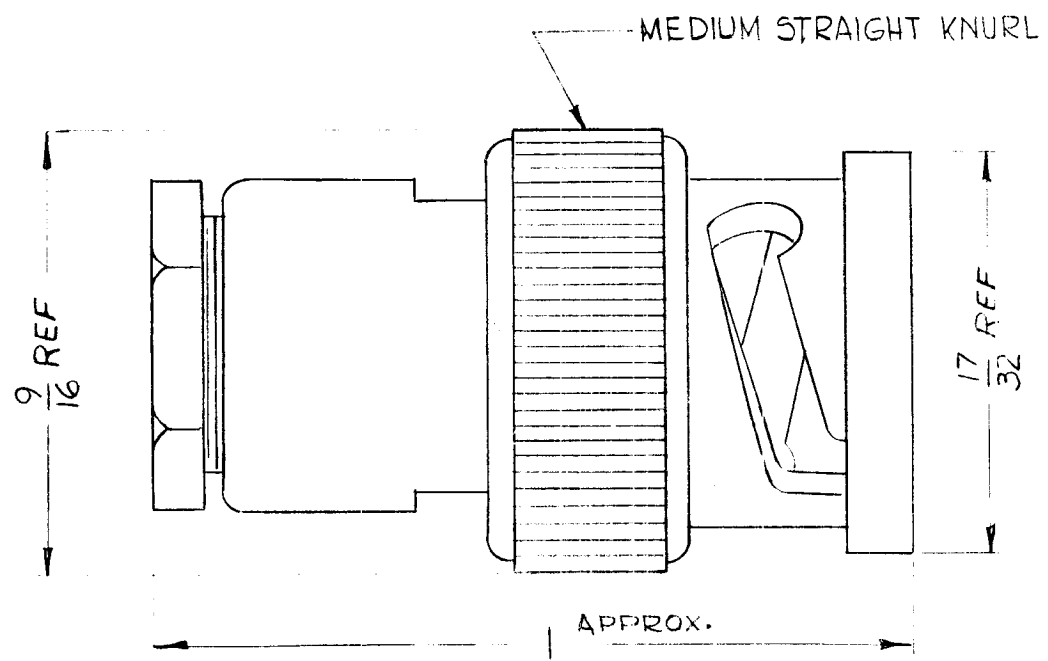

SPECIFICATIONS:
 SERIES - BNC BAYONET
 No. OF CONTACTS - 1
 TYPE OF CONTACT - MALE
 DIELECTRIC - STYRENE OR REXOLITE

ELECTRICAL DATA:
 MAX. PEAK OPR. VOLT - 500 VOLTS
 FREQ. LIMIT - 10000 MCS
 NOMINAL IMPEDANCE - 50Ω

CABLE ACCOMMODATIONS:
 TYPE - RG 59/U, 140/U (75Ω)
 TYPE - RG 62/U, 71/U (93Ω)
MATING ACCOMMODATION:
 TYPE - BNC

MATERIAL:
 EXTERNAL PARTS - BRASS
 CONTACT - BRASS
 GASKET - SILICONE

FINISH:
 EXTERNAL PARTS - SILVER PLATE
 CONTACT - SILVER PLATE (GOLD FLASH ON SILVER PLATE OPTIONAL)
PANEL:
 MAX. THICKNESS - NONE

OBSOLETE
 SEE MIL-C-39012/16

REF: MIL-HDBK-216 MIL-C-3608

D	OBSOLETE NOTE ADDED	5-8-67	18263	G.D.L.	1/16	R.H.	ITEM	PART NO.	DESCRIPTION	SYMBOL		
C	9/16 WAS 5/8, 17/32 WAS 9/16 ADDED REF MIL-C-3608	5/25/66	16284	C.H.	9/16	9/16			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
B	ON SPECS, CONTACT WAS BERR. COPPER ON SPECS, DIALECTRIC WAS POLYTET...	8-5-64	12019	hwb	2	2		STOCK SIZE		PLUG, SERIES BNC.		
A	UPDATED & CLARIFIED	12/17/63	10496	RD	RD	RD		MATERIAL				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	4:1							G.D.L.	R.P.	BP
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE	FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	UG-260*/U D	