HOLE	DESCRIPTION	REQ.
A	.13/64 DIA.	4
B	.251 - .254 DIA.	12
C	.191 - .194 DIA.	6
D	3/16 DIA.	4
E	1/4 DIA.	8
F	3/16 x 19/32 SLOT	4
G	.750 DIA.	1
H	5 11/16 DIA.	1
J	2 1/4 DIA.	1

REVISIONS

ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	X	EXPERIMENTAL RELEASE	12-24-64		HLA		
	X1	COMPLETELY REDIMENSIONED	2/26/65				
	Ø	ORIGINAL RELEASE FOR PRODUCTION	2-26-65	Ø	RL	HS	
4	A	ITEM (2) WAS (8) REQ.; DESCRIPTION UPDATED; ITEMS (1) & (2) RELOCATED (ERROR)	3-22-65	13702	EL		
	B	'G' HOLE QTY. WAS 4 (ERROR) 1 'G' HOLE ADDED, .750 DIA, 2 D HOLES DELETED	6-21-65	14158	DVV		

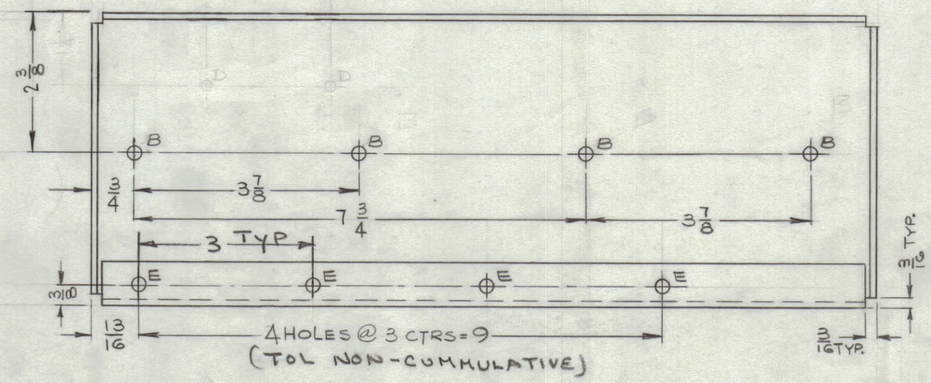

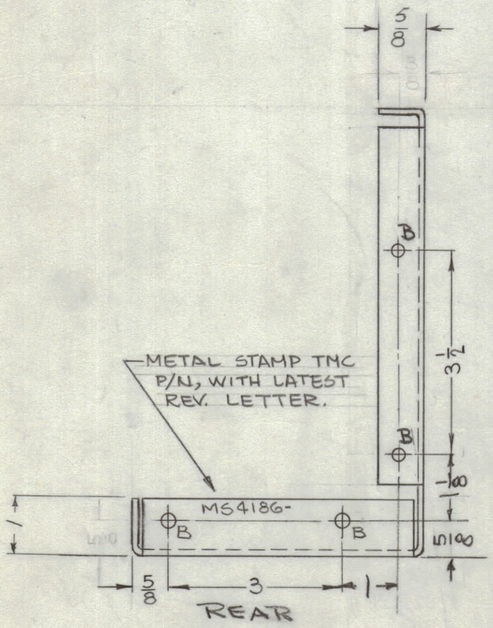

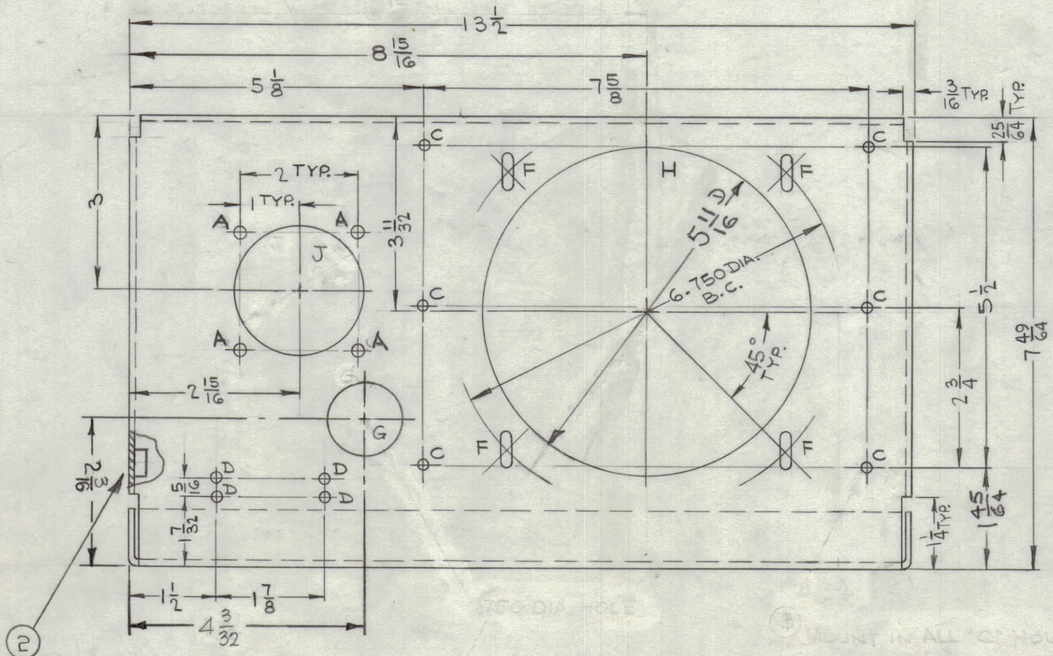

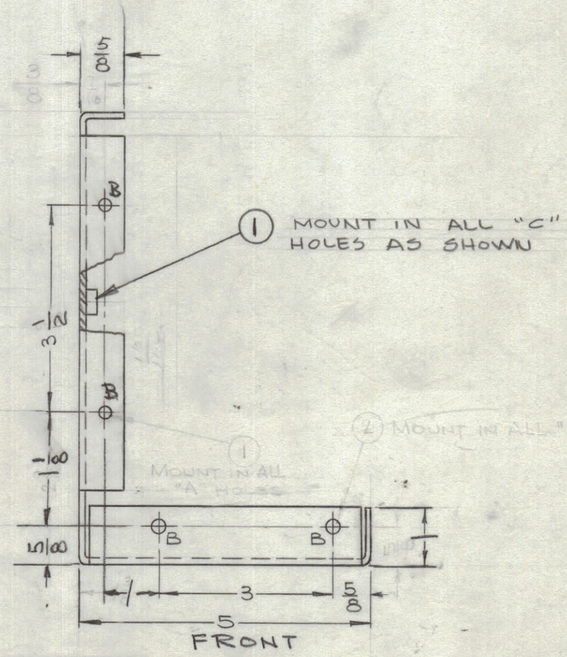

REF: LD 1754

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
12	2	NT129-1032-4	NUT, PLAIN, SPLINE	B
6	1	NT129-632-4	NUT, PLAIN, SPLINE	C

LIST OF MATERIAL

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
1	HYRB-1	
1	HYRC-1	

SCALE: HALF SIZE | CODE: A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

MATERIAL: 1/8 THK. ALUMINUM, 5052-H32

FINISH: IRIDITE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES — DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005 — FRACTIONS: ± 1/64 — ANGLES: ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: SIDE PLATE, LEFT

DRAWN	H. AUSTIN	DATE 12-24-64	FINAL APPROVAL / DATE
CHECKED		DATE	
ELECT. DES.		DATE	MS4186 B
MECH. DES.		DATE 9/26/68	SHEET / REV. LTR.

MS4186 B

TMC FORM 110

REPROVEL NO. 440H 1610B