


REQ. PER UNIT	USED ON			NP836 A
	MODEL	ASS'Y. NO.	DATE	
1	TER-5000/50		3-24-66	

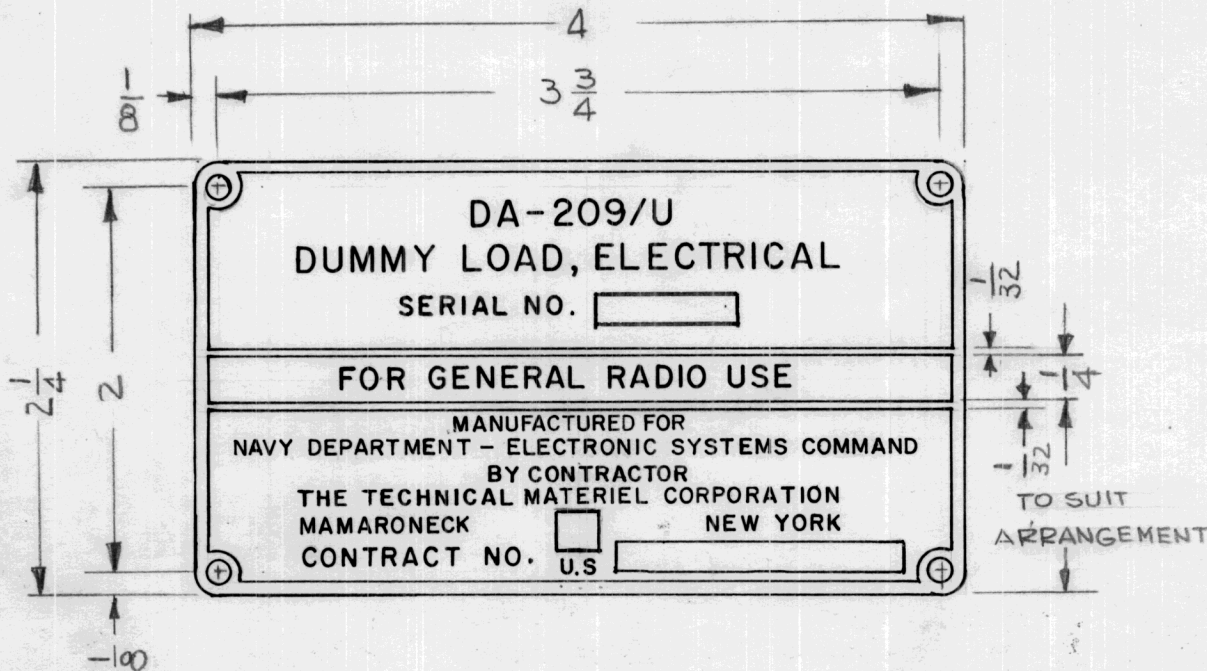

NOTE 1 FINISH:
REVERSE ETCH, LUSTERLESS
BLACK (37038) BACKGROUND
PER FED-STD-595

NOTE 2 TYPE FACE
LETTERING TO BE GOTHIC OR
SPARTAN; W/MODIFIER (HEAVY
MEDIUM, CONDENSED, ETC.)
AS REQUIRED TO FIT SPACE.

NOTE 3 IDENTIFICATION PLATE TO BE
MANUFACTURED IN ACCORDANCE
WITH MIL-P-15024 AND AMENDS
(TYPE A)

CORNER RADIUS- INSIDE AND OUTSIDE 1/8 R.
4 HOLES- 1/8 DIA.
BORDERS- 1/16
SERIAL BLOCK- 5/32 x 3/4
U.S. BLOCK- 7/32 SQUARE
CONTRACT NO. BLOCK- 5/32 x 1-1/2

NAVSEEC

REQ.	ITEM	PART NO.				DESCRIPTION	SYMBOL		
		.032 THK				THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
A	ELECTRONIC SYSTEMS COMMAND WAS BUREAU OF SHIPS (SHORE)	6-7-66	16342	N.C.	<i>JB JC</i>	PLATE, IDENTIFICATION			
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/7/66	MA	Jc	<i>JB Jc</i>				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				5052-H32	G.D.L.	<i>JB</i>	
TOLERANCES		CODE			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS	FRACTIONS				SEE NOTE		<i>and</i>		
.X ± .05	± 1/64				FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP836	A
.XX ± .01	ANGLES								
.XXX ± .005	± 0° 30'								