IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

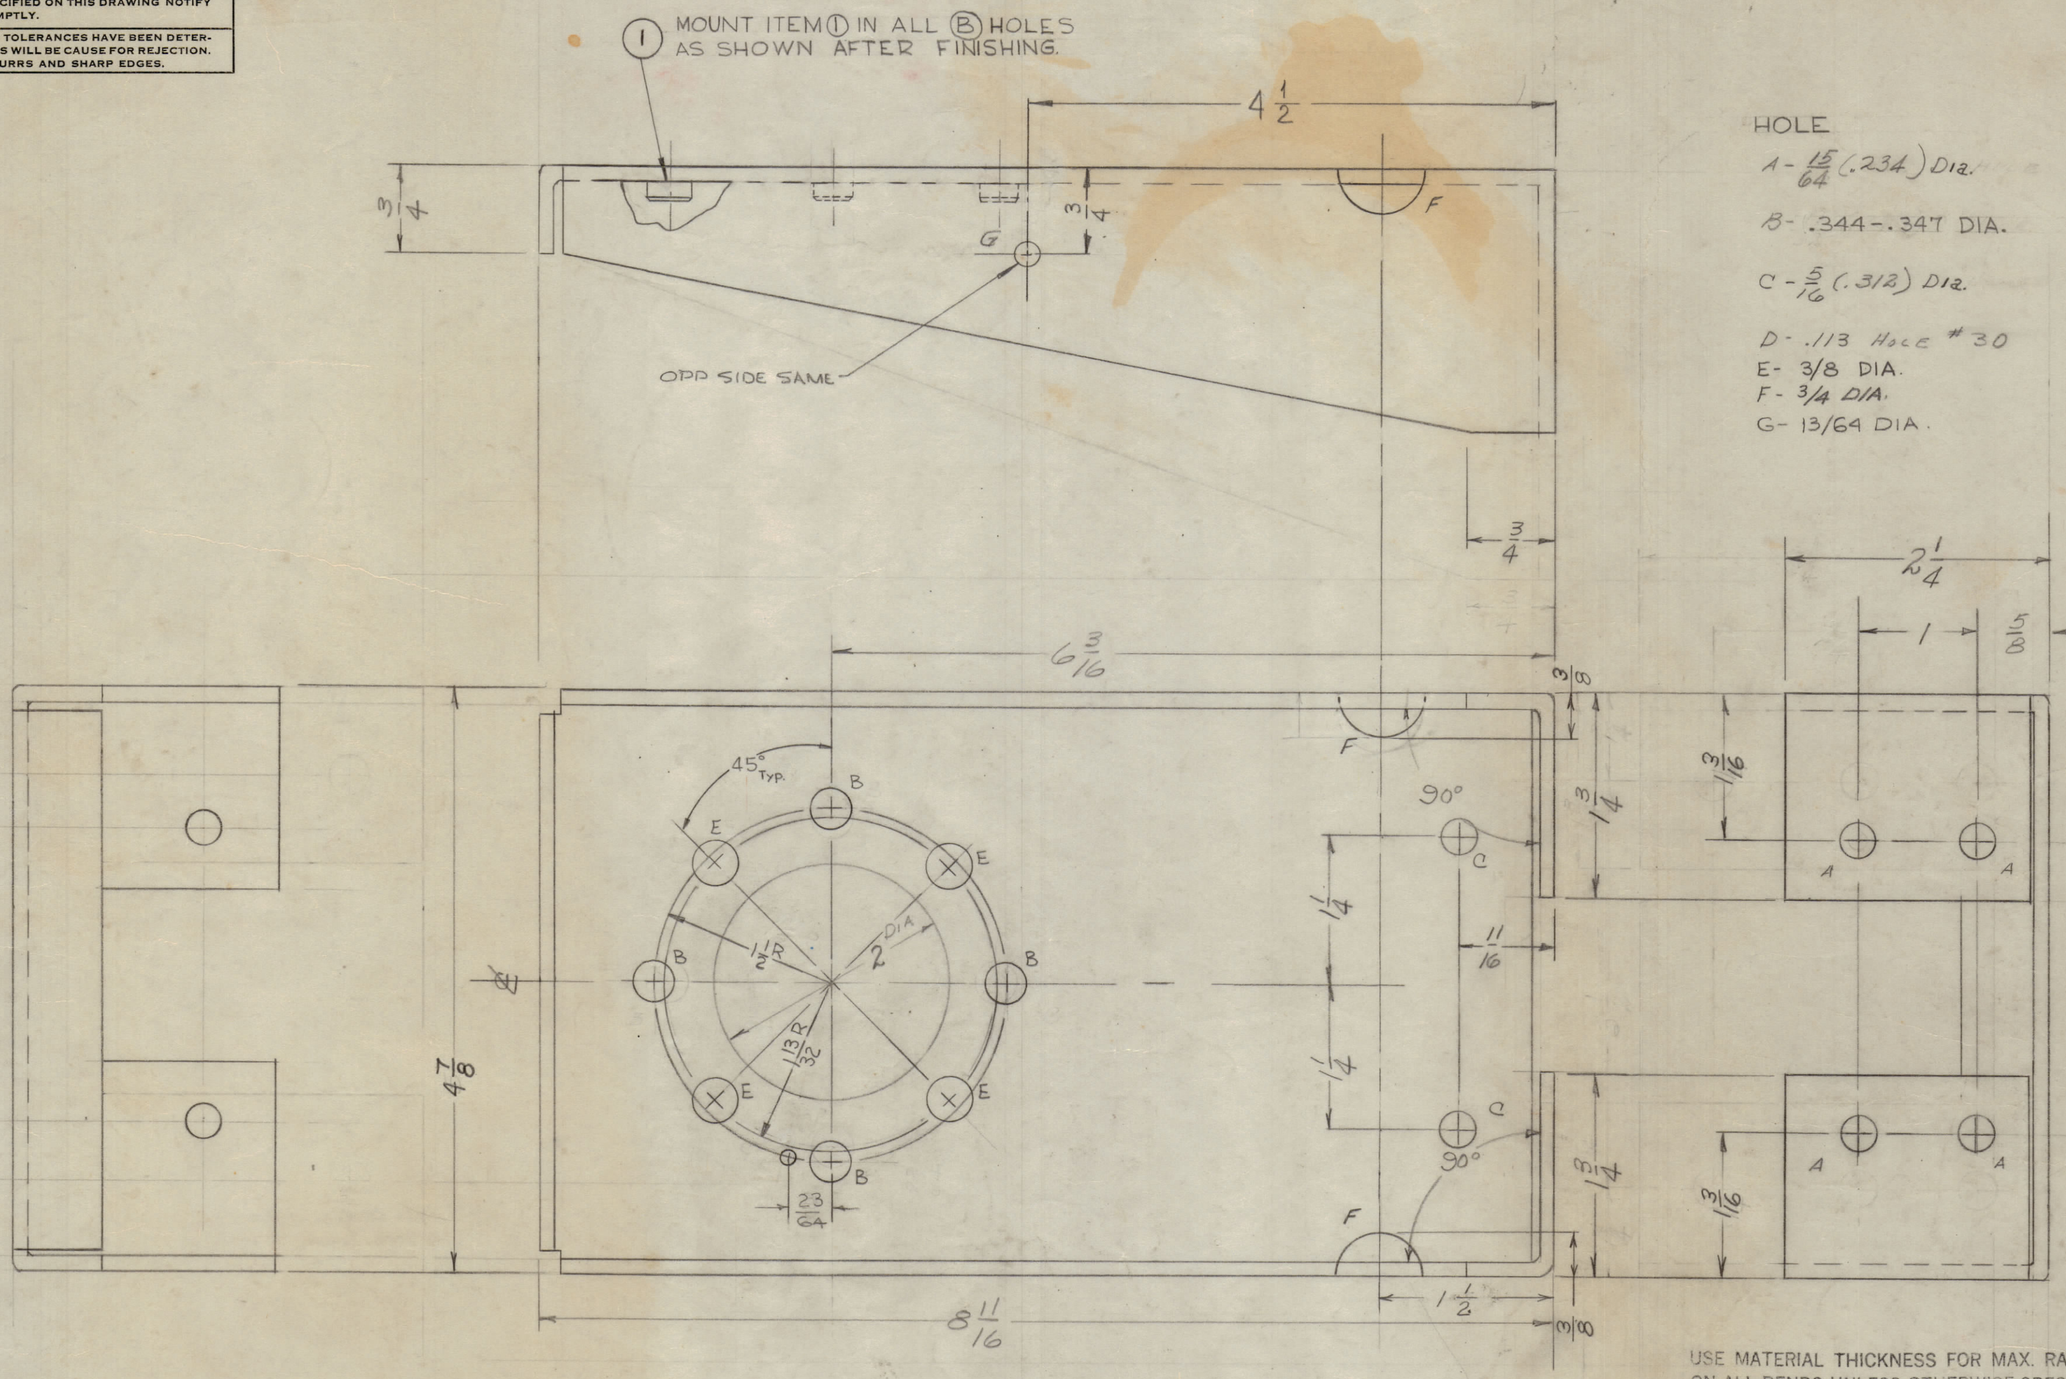

HOLE

A - 15/64 (.234) Dia.	4 REQ.
B - .344 - .347 DIA.	4 REQ.
C - 5/16 (.312) Dia.	2 REQ.
D - .113 Hole #30	1 REQ.
E - 3/8 DIA.	4 REQ.
F - 3/4 DIA.	2 REQ.
G - 13/64 DIA.	2 REQ

NOTE:
F HOLE SHOULD BE CENTERED ON BEND LINE.

USE MATERIAL THICKNESS FOR MAX. RADIUS ON ALL BENDS UNLESS OTHERWISE SPECIFIED

MOUNT INSERTS AFTER FINISHING

LD 2069 (2) GPT 10 KLF
REF: LD-596(2) GPT 10K( )R

MS-1605 F

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
F		"G" HOLE ADDED	4-12-66	16089	WW		
E	1	ADDED 2 F HOLES	2/26/64	10882	A.M.		
D	2 1	1 3/16 WAS 1 1/4 (2) (RIGHT CEN.) 4 7/8 WAS (5) (LEFT CENTER)	6-26-62	6817	R.T.		
C	1	4(E) HOLES ADDED	3-26-62	6483	[illegible]		
B	2	1 1/2 R WAS 1 13/32 R	12-27-60	6100	GG		
	1	Item (1) Added (B) Holes Were .343D.					
A	1	SEAM WELDS DELETED	8-11-60	2760	CJ		

TOLERANCES		SCALE: NO
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
1	GPT-10KLF	AX-531		4-12-66
1	GPT-10K	T1-101		2-26-59
USED ON				

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	1	NT-129-420-6	NUT, ROUND, SWAGE TYPE	B

STOCK SIZE: 1/8 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
MATERIAL: ALUMINUM	WEIGHT PER PC.	BRACKET, ANT. CONNECTOR GPT-10K	
TYPE & TEMPER: 5052-H32		DRAWN: [illegible]	ELEC. DES. APP.	MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.: 5404 IRIDITE			MS-1605 F

FORM-110

TRIANGLE LITHOPRINT CO., INC.