REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	X	EXPERIMENTAL RELEASE	5/18/64	X	JL		
	X1	COMPLETELY REVISED	6/5/64	X1	JL		W.J.
	X2	REVISED "D" HOLE POSITIONS	9/25/64	X2	JL	[illegible]	W.J.
E6	X3	ON "C" CUTOUT, LOCATING DIM 5/8 WAS 19/32	1-19-65	X3	[illegible]	J.M.	W.J.
	Ø	ORIGINAL RELEASE FOR PRODUCTION	2-12-65	Ø	HLA	J.M.	

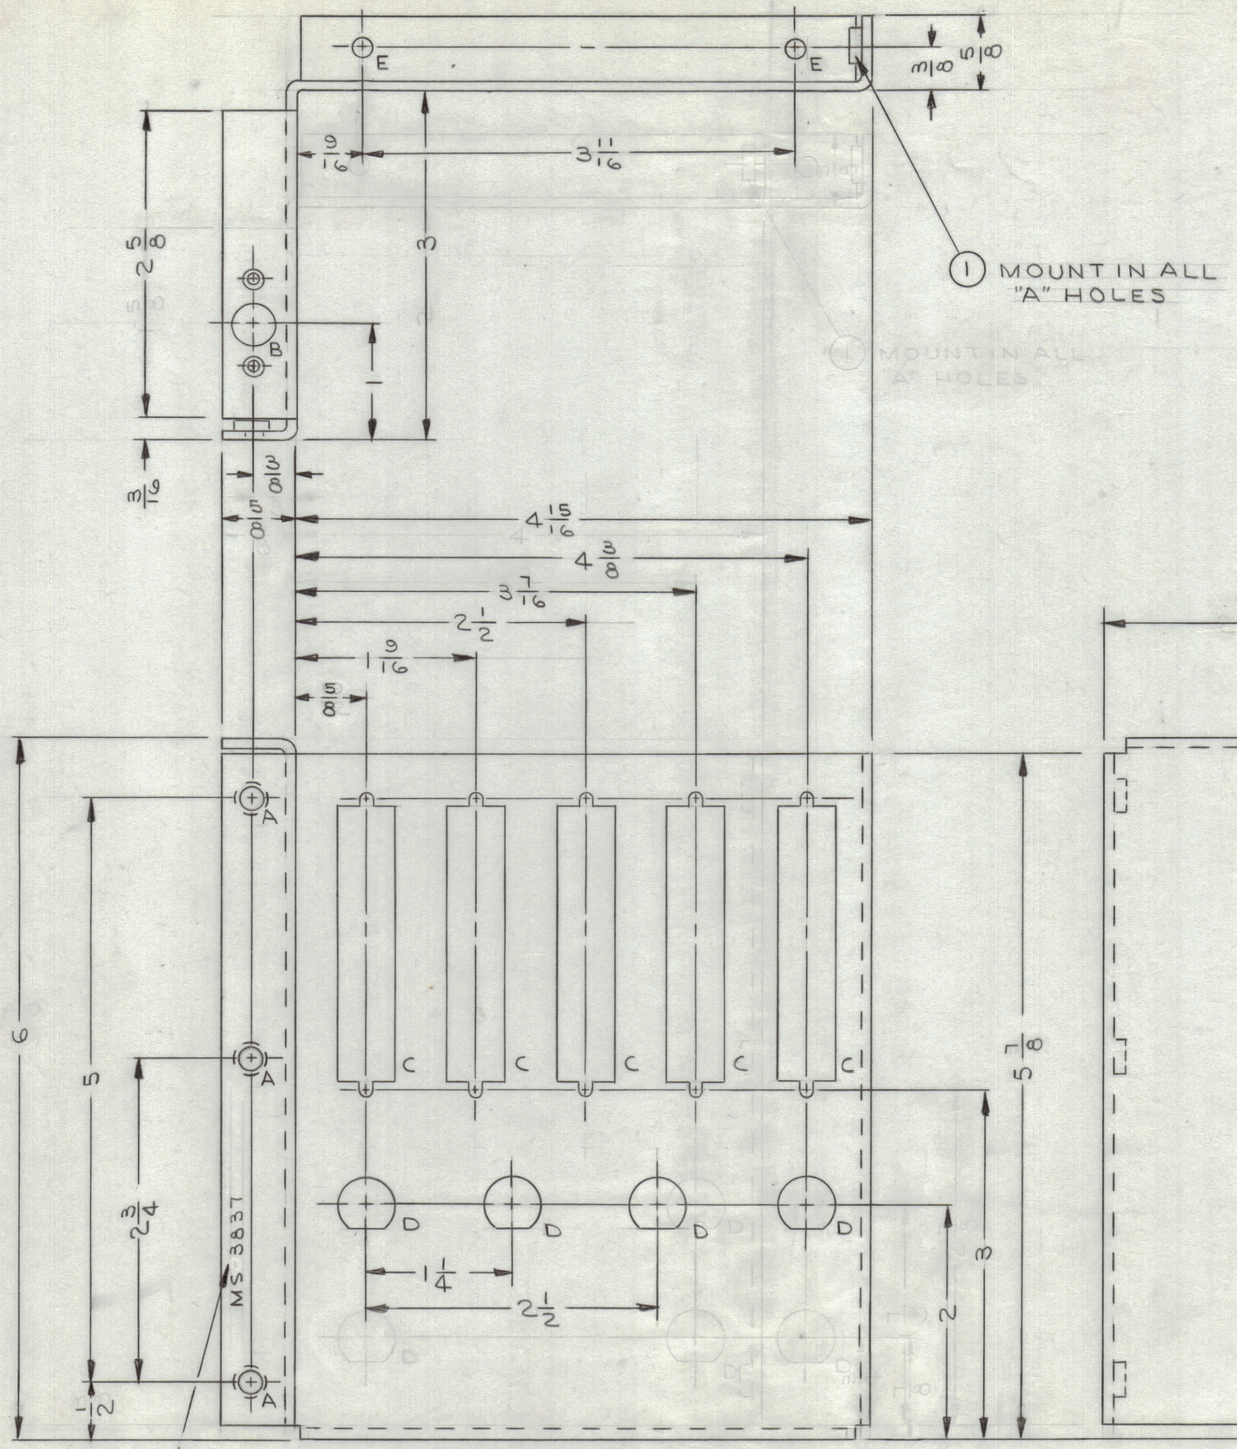

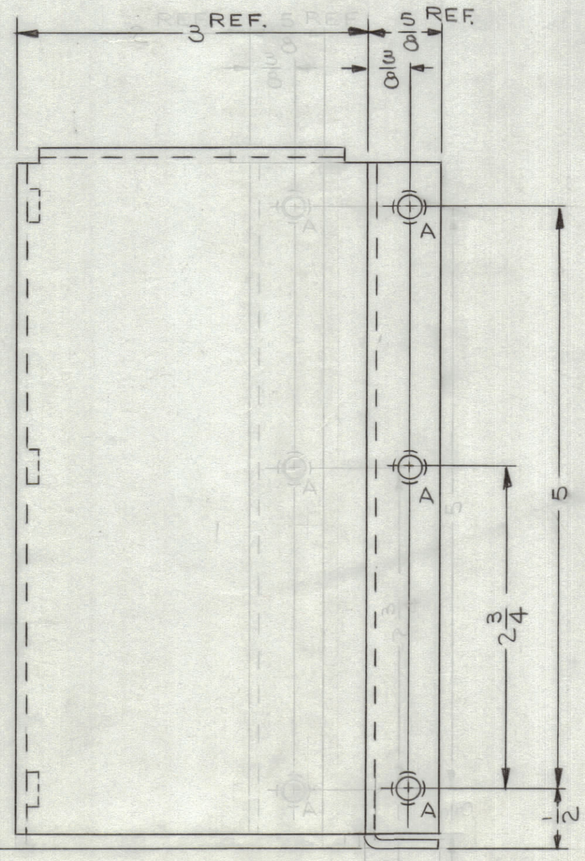

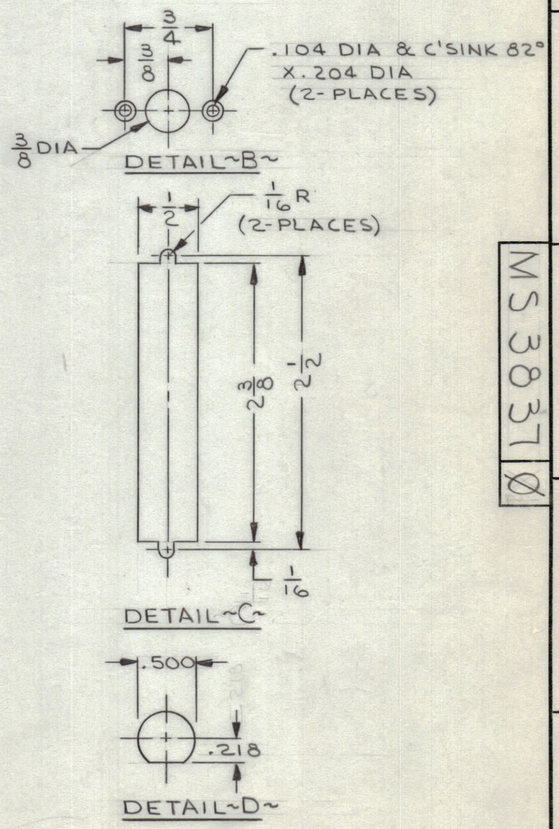

HOLE LEGEND		
HOLE	DESCRIPTION	REQ'D
A	.221-.224 DIA.	6
B	SEE DETAIL	1
C	SEE DETAIL	5
D	SEE DETAIL	4
E	3/16 DIA	2

MS 3837 Ø

METAL STAMP TMC PART NO.
1/8 HIGH GOTHIC, WITH
LATEST REVISION LETTER

NOTES

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90°.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

REF: LD1617

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
6	1	NT 129-832-4	NUT, PLAIN, SPLINE TYPE	A

F.E. EATON — LIST OF MATERIAL

MATERIAL: .081 THK ALUMINUM 5052-H32	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
FINISH: YELLOW IRIDITE PER 5404	TITLE: BRACKET, MOUNTING, CONNECTOR

Q'T'Y./UNIT	MODEL USED ON	ASS'Y. NO.
1	RTTD-1	A3705

SCALE 1:1 — CODE A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES — DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

DRAWN J. LESHINSKI	DATE 5/18/64	FINAL APPROVAL	DATE
CHECKED [illegible]	DATE 2/9/65		
ELECT. DES. [illegible]	DATE 2/8/65		
MECH. DES. W. JORDAN	DATE 2/8/65	SHEET MS3837	REV. LTR. Ø

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

TMC FORM 110

REPROVEL NO. 440H