APPLICATION			REVISIONS						
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
X	SW-477	A	Ø	ORIGINAL RELEASE	5/26/69	Ø	AM		
16	SPP34416	A5600	A	ADDED ASS'Y REF.	6/11/74	A			

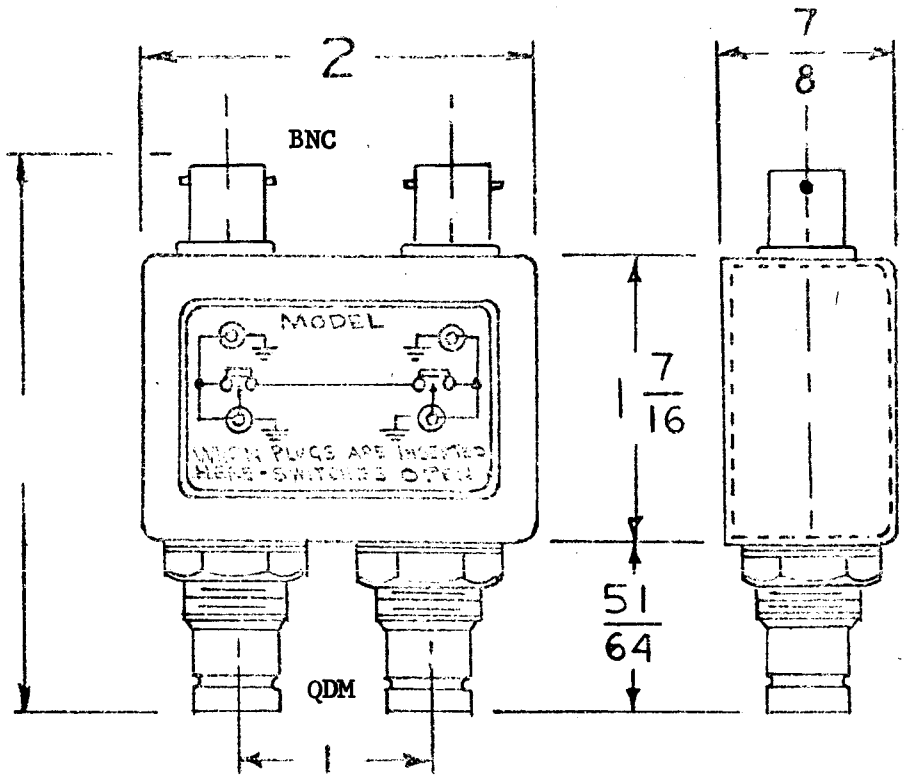

ELECTRICAL DATA

Max. peak volt 500V
Freq. limit 0-32MHz
Nom. Impedance 75 ohms

NOTES:

(1) CAUTION: Use only 75 ohm mating series connectors
(2) ASSIGNED: Patent No. 2,767,267
(3) MOUNTING: Internal Lockwasher; flat washer; Hex Nut 1/2 X 32 threads; 17/32 dia. hole; 5/16 thick material

(4) CASE:	Material	Brass	per QQ-B-626
	Finish	Grey Enamel	per TMC S-115
(5) CONNECTORS:	Body	Silver Flash	per QQ-5-365 Type II Grade B
		Rhodium Flash	per MIL-R-46085 Type I Class 2
	Dielectric	Teflon	per MIL-P-19468; Virgin
	Contacts	Bryllium Copper	per QQ-C-530 Condition HT
	Finish	Gold Flash	per MIL-G-45204 Type II Class 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 TOLS. FRACTIONS 1/64 ANGLES 0° 30'

MATERIAL SEE NOTES

FINISH SEE NOTES

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.

MARTINENGO

LIST OF MATERIAL

FINAL APPROVAL	DATE 6/26/69
MECH. DES.	DATE 6-4-69
ELECT. DES.	DATE
CHECKED	DATE
DRAWN	DATE 6-4-69

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

SWITCH R. F.
NORMAL THRU, SELF LOOP
QDM TO BNC

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from **THE TECHNICAL MATERIEL CORPORATION** to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	SW-477	A

SCALE | SHEET OF